

METRO LINEAR WALL MOUNT

SAFETY AND INSTALLATION INSTRUCTIONS

FIXTURES MUST BE INSTALLED BY A QUALIFIED ELECTRICIAN (CHECK WITH LOCAL AND NATIONAL CODES FOR PROPER INSTALLATION). TO PREVENT ELECTRICAL SHOCK, DISCONNECT ELECTRICAL SUPPLY BEFORE INSTALLATION OR SERVICING.

1. READ ALL INSTRUCTIONS PRIOR TO INSTALLATION.
2. DISCONNECT ELECTRICAL POWER BEFORE SERVICING LUMINAIRES.
3. SINGLE GANG OUTLET DEVICE COVER TO BE USED (HORIZONTALLY MOUNTED).
4. REMOVE PLASTIC SLEEVE AFTER INSTALLATION IS COMPLETE.
5. TO AVOID DAMAGE, KEEP LUMINAIRE IN ORIGINAL CARTON.
6. DO NOT PLACE HEAVY OBJECTS ON CARTON.

UNIT DESCRIPTION

FMEW (METRO) FIXTURE

QTY: 1


Dimensions: 8.2" x 46.5" x 1.3" high

8.2" x 93.0" x 1.3" high

Weight: 4' = 16 lbs

8' = 32 Lbs


INSTALL PER
MANUFACTURER'S
SPECIFICATION'S

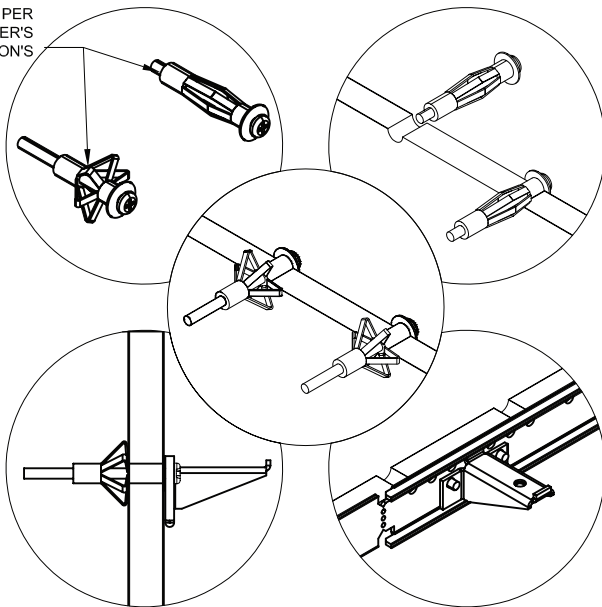


SUPPLIED BY FOCAL POINT

#8 X 1/2" Pan


Head Screws



Wall Mounting Rail,
Brackets and Nuts



"J" Box Adapter
Plate and Cover



EMERGENCY:

SEE BATTERY
MANUFACTURER
INSTRUCTIONS

EMERGENCY MAXIMUM
MOUNTING HEIGHT: 8.00'

WHEN USING HOLLOW WALL ANCHORS (BY OTHERS) IN GYPSUM WALLBOARD, FOCAL POINT STRONGLY RECOMMENDS THE ADDITION OF WALL REINFORCEMENT AT THE BRACKET MOUNTING POINTS. IF THIS IS NOT POSSIBLE, A MINIMUM WALLBOARD THICKNESS OF 5/8" IS REQUIRED AND A 10-24 DRILL STYLE EXPANSION ANCHOR RECOMMENDED (SEE ABOVE).

CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY REINFORCING WALLS AND/OR CEILINGS TO SUPPORT FIXTURE WEIGHT. FOCAL POINT, L.L.C. ACCEPTS NO RESPONSIBILITY FOR INADEQUATELY REINFORCED WALLS AND/OR CEILINGS.

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF FOCAL POINT LLC. ANY REPRODUCTION IN PART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF FOCAL POINT LLC IS PROHIBITED.

2016 © FOCAL POINT LLC



FOCAL POINT


INSTALLATION GUIDE NO.

IS0201


DWG. NO.

REV. C

INSTALLATION GUIDE

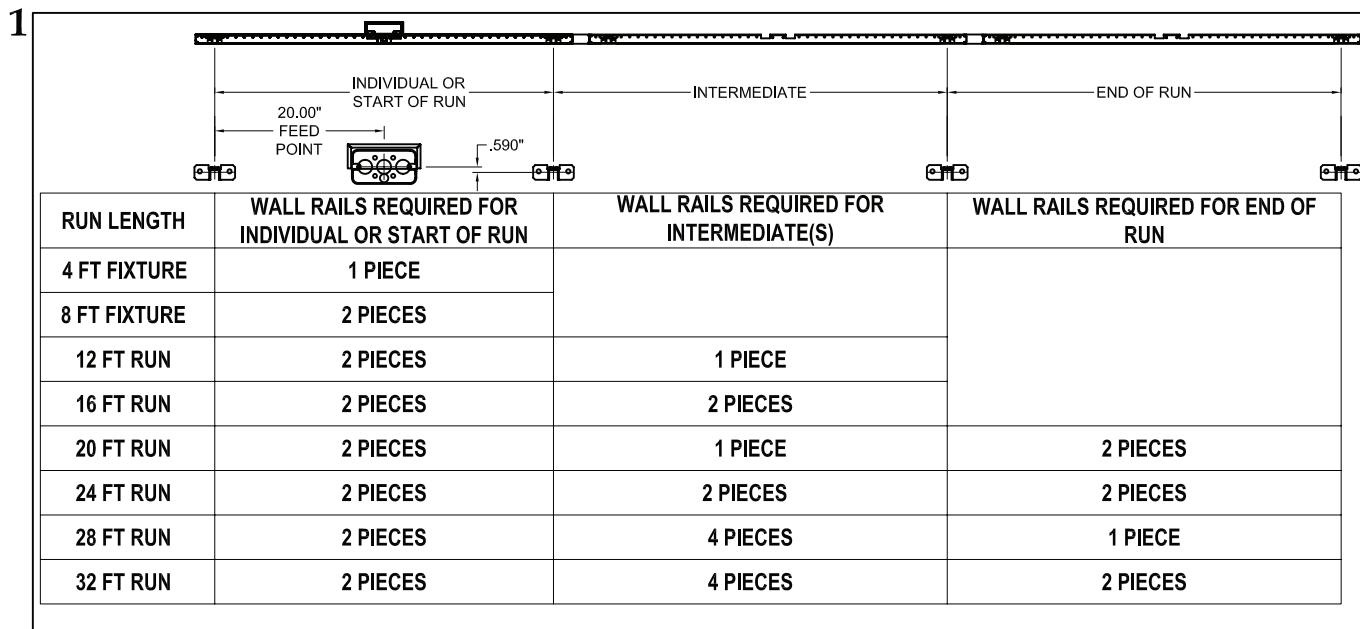


STANDARD RUN CONFIGURATIONS SHOWN, CONSULT FOCAL POINT FOR CUSTOM RUN CONFIGURATIONS. ALL LUMINAIRE RAILS ARE 4FT LONG AND CAN BE MOUNTED END TO END TO FORM A CONTINUOUS WALL RAIL.

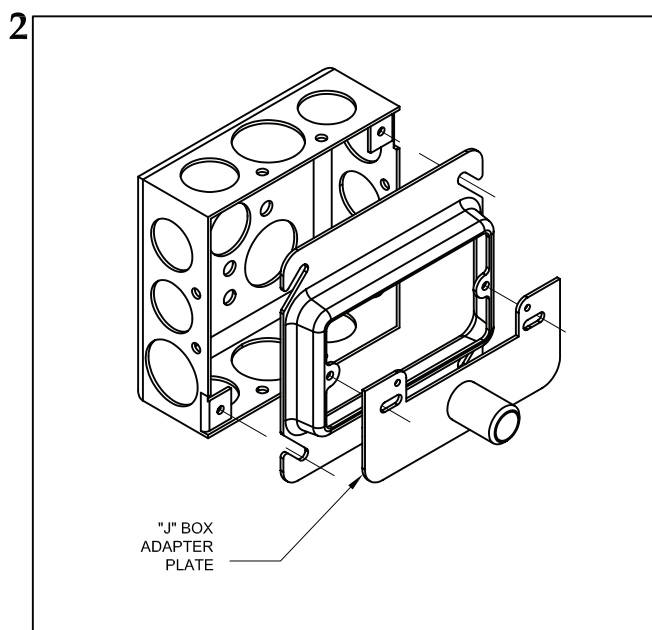

LOCATE FEED POINT OF LUMINAIRE (RUN), FASTEN "J" BOX ADAPTER PLATE. SEE CHART ABOVE (DIMENSION GIVEN FROM CENTER OF MOUNTING BRACKET TO CENTER OF "J" BOX).


DIMENSION FROM EDGE OF LUMINAIRE TO CENTER OF "J" BOX IS 23.750".

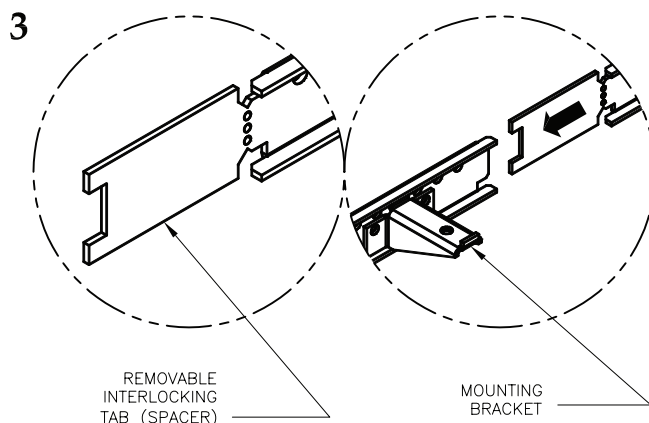

INTERLOCKING TAB OF INDIVIDUAL OR START OF RUN RAIL MUST BE CUT OFF.


ALL OTHER RAILS WILL INTERLOCK AND PROVIDE THE REQUIRED MOUNTING BRACKET SPACING.

INDIVIDUAL OR START OF RUN RAILS WILL BE SUPPLIED WITH TWO MOUNTING BRACKETS, INTERMEDIATE OR END WILL BE SUPPLIED WITH ONE.

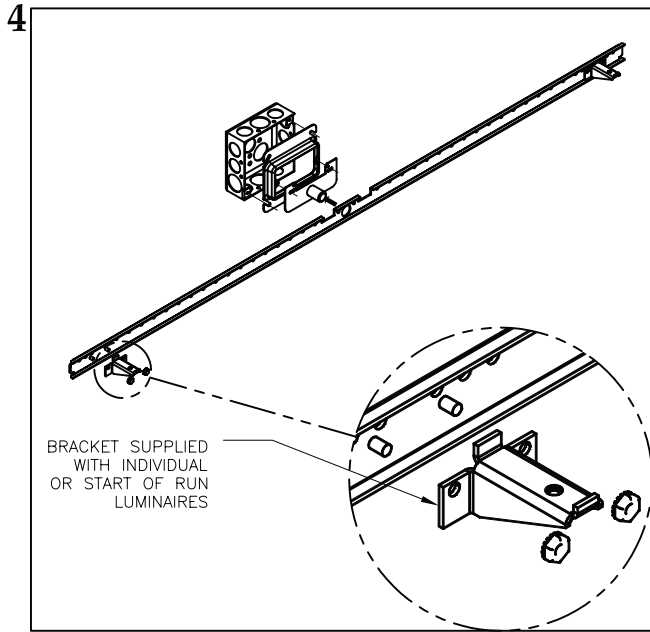


POSITION INDIVIDUAL OR START OF RUN RAIL OVER "J" BOX ADAPTER PLATE AND ATTACH SECURELY TO WALL, ATTACH LEFT SIDE MOUNTING BRACKET TO RAIL (INDIVIDUAL OR START ONLY) WITH NUTS SUPPLIED.


CONTINUE WITH REMAINING RAILS.

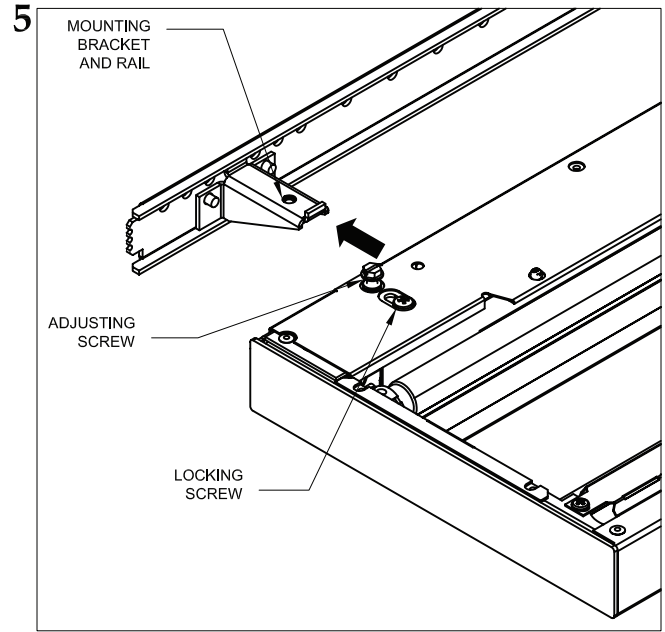

POSITION LUMINAIRE OVER MOUNTING BRACKET, INSTALL LOCKING SCREWS (DO NOT TIGHTEN) TO TEMPORARILY SECURE FIXTURE, INSTALL ADJUSTING SCREW (DO NOT TIGHTEN). CONTINUE WITH REMAINING LUMINAIRES.

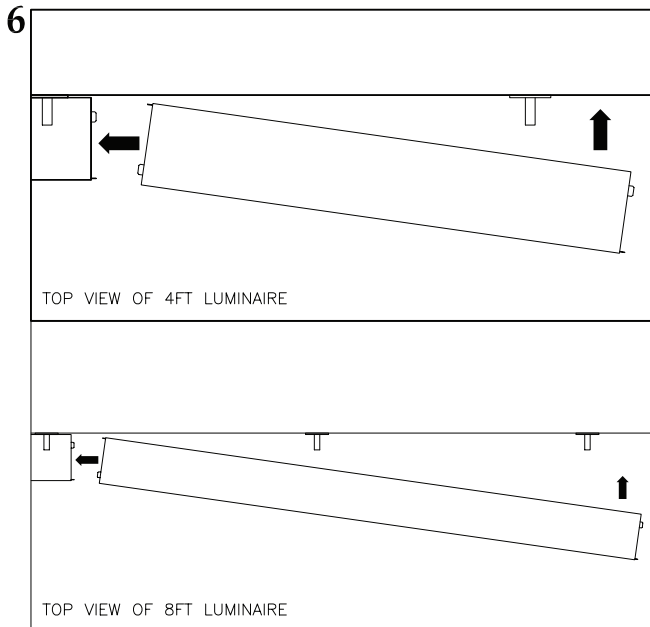


POSITION NEXT LUMINAIRE IN RUN AT AN ANGLE FROM THE WALL, CONNECT WIRING HARNESS AND PUSH INTO WIRING COMPARTMENT. 8FT SECTIONS REQUIRE TWO MOUNTING RAILS (SUPPLIED).

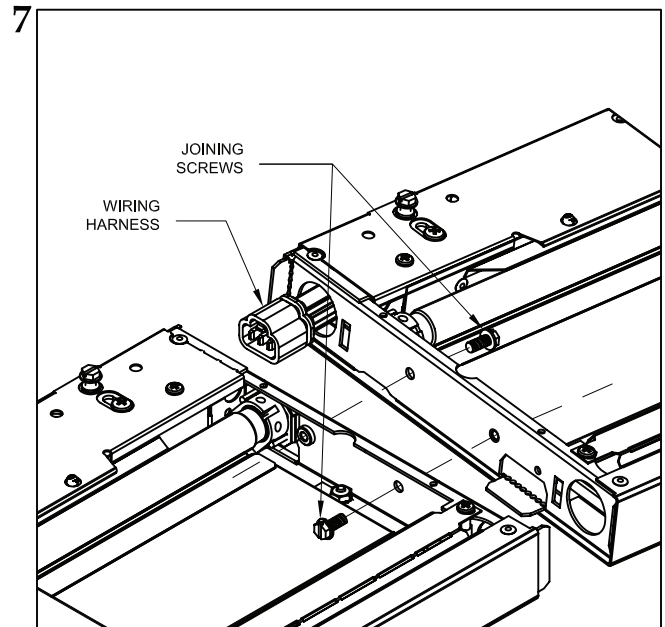

ALIGN BULKHEAD TABS AND SLIDE IN PLACE, INSTALL LOCKING AND ADJUSTING SCREWS (DO NOT TIGHTEN). FASTEN BULKHEADS TOGETHER WITH JOINING SCREWS.


LAMPING INSTRUCTIONS

8

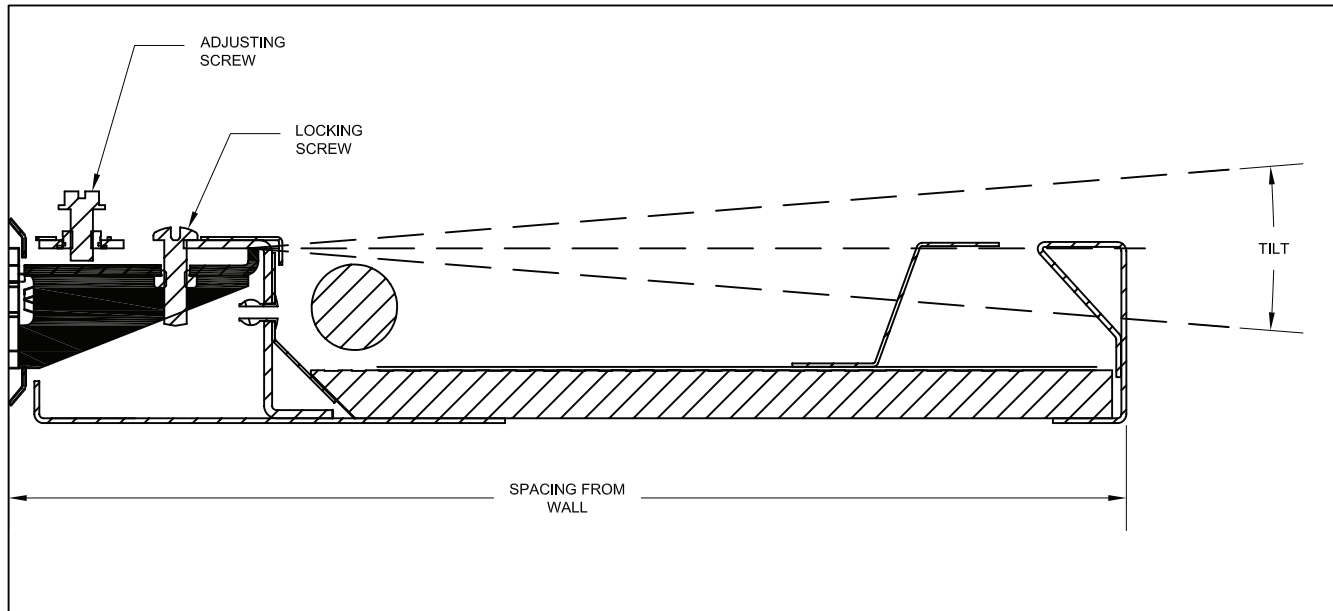

ADJUST LUMINAIRE TILT AND SPACING FROM WALL AS NEEDED AND TIGHTEN LOCKING SCREW.

9

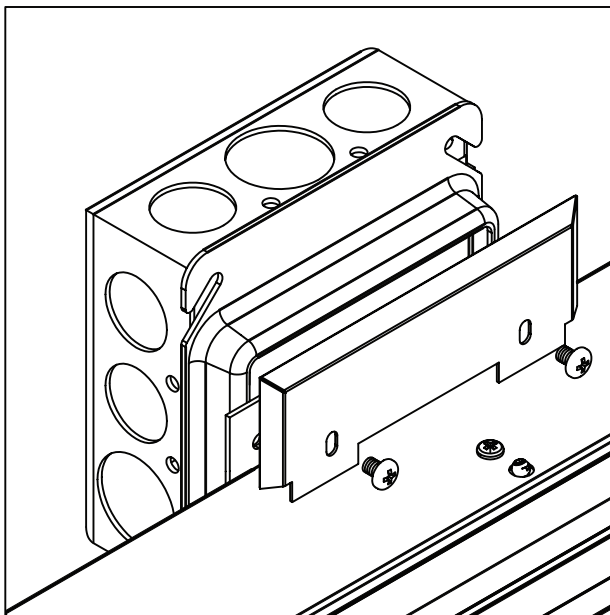

MAKE ELECTRICAL CONNECTIONS.
INSTALL "J" BOX COVER PLATE AND FASTEN.