


# Seem® 4-LP

LED



FOCAL POINT®

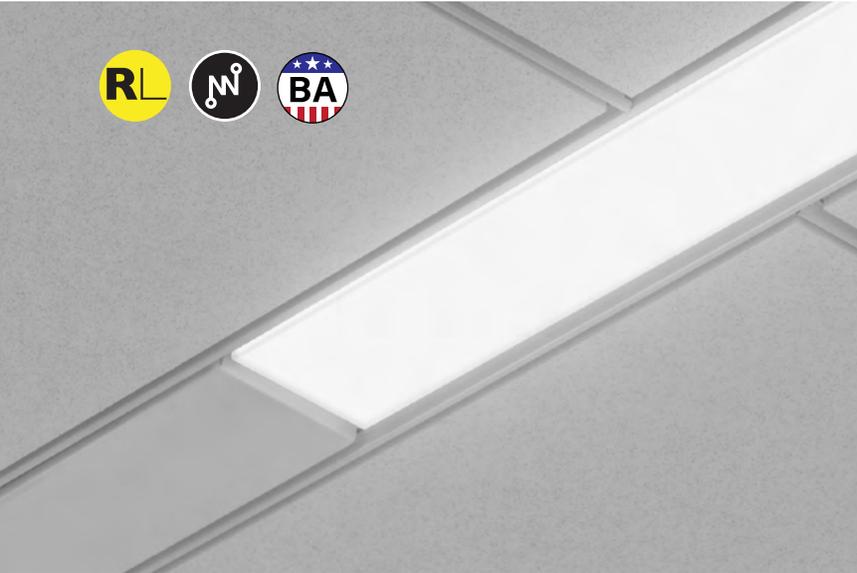

flush lens



regress lens

## SEEM 4 FAMILY COMPANIONS




drywall ceiling



corners & patterns



perimeter




suspended



wall mount

## DIMENSIONAL DATA

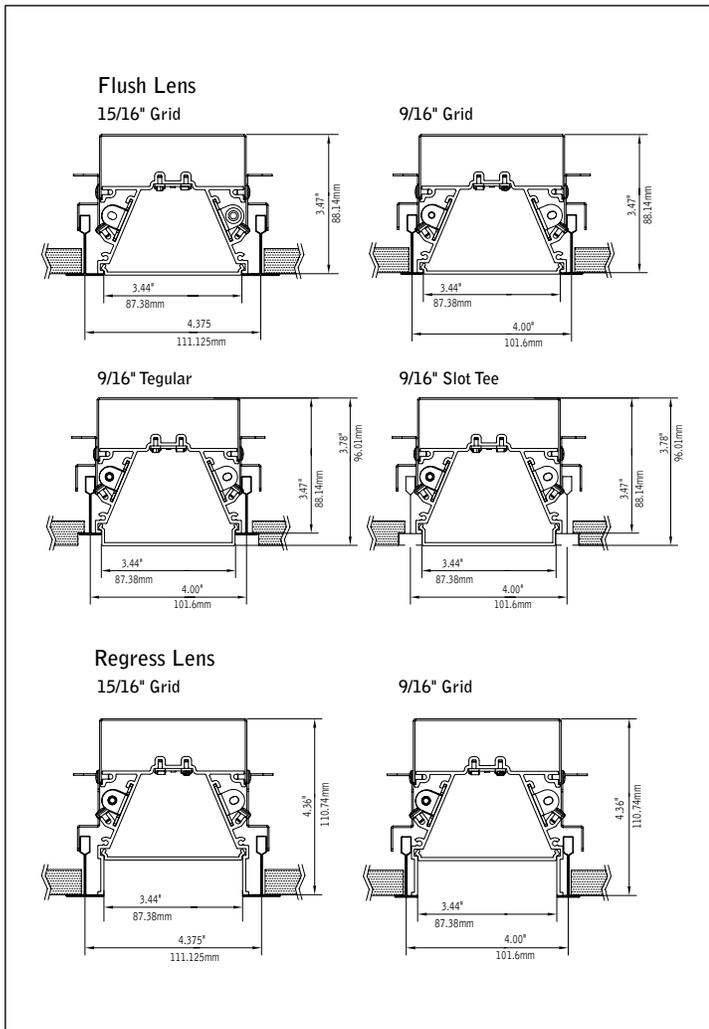

## FEATURES

Low profile 3.6" housing depth on flush lens option and 4.5" housing depth on regress lens option.

Individual units or continuous runs in 6" increments.


Compatible with common pre-engineered grid ceiling systems requiring luminaires fitting into a 4" slot.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Connected Solutions: Integrates with wired and wireless building lighting control systems.


## PERFORMANCE

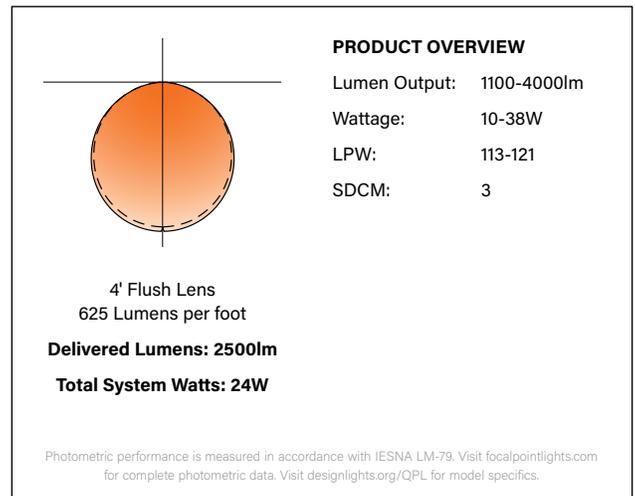

fixture:

project:

**DETAILS**

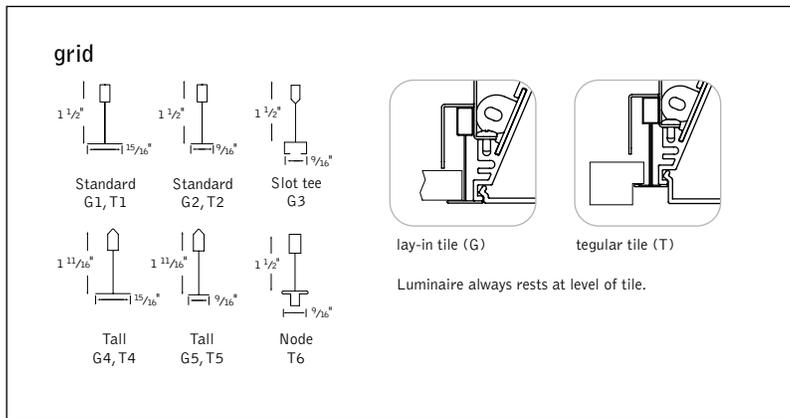

**4' PERFORMANCE CHART**

Lumen Output	Nominal Lumens	FL		RL	
		Tested System Watts	LPW	Tested System Watts	LPW
275LF	1100	9.0	122	9.5	116
375LF	1500	11.4	132	12.0	125
625LF	2500	18.2	137	19.4	129
875LF	3500	26.5	132	28.3	124
1000LF	4000	30.4	131	32.6	123

\*Based on 3500K, 4' lengths. Regress Lens multiplier = 0.90. Lumen may vary +/-5%. Actual wattage may vary

**ORDERING**

<b>Luminaire Series</b>	<b>FSM4LP</b>	<b>FSM4LP</b>
Seem 4-LP	FSM4LP	
<b>Shielding</b>		
Flush Satin Lens	FL	
Regress Lens	RL	
<b>Lumen Output</b>		
275 Lumens per foot <small>(2' LD1 &amp; L11 only, 3' minimum all other drivers.)</small>	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
<b>Circuits &amp; Zones</b>		
1 Circuit, non-emergency	1C	
Consult Ordering Guide on page 4 for multiple circuiting and zoning options	_C_Z_DL	
<b>Voltage</b>		
120/277 UNV Volt	UNV	
347 Volt <small>(LD1 driver only)</small>	347	
<b>Control System &amp; Dimming Level</b>		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Wattstopper PLUS**	WSPC	
Connected Light Module <small>(0-10V standard. Consult Factory for DALI)</small>		
Wattstopper PLUS**	WSPS	
SensiLUM Wireless Sensor <small>(0-10V standard. Consult Factory for DALI)</small>		
Lutron Athena Wireless Node** <small>(0-10V standard. Consult Factory for DALI)</small>	LAW1	
Lutron Athena Wireless Sensor** <small>(0-10V standard. Consult Factory for DALI)</small>	LAWS	
Acuity nLight - 1% Dimming** <small>(Not available with CF)</small>	NLT1	
Current NX Enabled - 1% Dimming** <small>(Not available with CP)</small>	NXE1	
WaveLinux Pro - 1% Dimming** <small>See sensor layout guide</small>	WLXP	
**(3' minimum length, with ECD/EM - 7' minimum.)		
<b>Ceiling Configuration</b>		
Std. 15/16" Lay-in or Std. 15/16" Tegular	G1 or T1	
Std. 9/16" Lay-in or Std. 9/16" Tegular	G2 or T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in or Tall 15/16" Tegular	G4 or T4	
Tall 9/16" Lay-in or Tall 9/16" Tegular	G5 or T5	
Node 9/16" Tegular	T6	
<b>Factory Options</b>		
<small>(See Ordering Guide on page 4 for ordering details for DC, EC, EM &amp; ECD.)</small>		
Chicago Plenum <small>(Not available with flex whip)</small>	CP	
Daylight Circuit	_DC	
Emergency Circuit	_EC	
Emergency Battery Pack†	_EM	
Emergency Control Device† <small>(Adds 125" to overall height.)</small>	_ECD	
<small>†(4' minimum, 120/277 Volt only)</small>		
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish</b>		<b>WH</b>
Matte White Housing	WH	
<b>Luminaire Length</b>		
2'	2'	
2' 6"	2' 6"	
3'	3'	
4'	4'	
5'	5'	
6'	6'	
7'	7'	
7' 6"	7' 6"	
8'	8'	
Specify luminaire/row length in 6" increments <small>(8' minimum row length)</small>	_ft._in.	

## SPECIFICATIONS

### LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3 SDCM. LED modules are replaceable from below the ceiling. Drivers are accessible from above the ceiling only.

### Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Aluminum driver compartment. 4' unit weight: 11 lbs., 8' unit weight: 19 lbs.

### Optic

Extruded acrylic lens .078" thick with satin finish, up to 8' continuous.

### Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%. Power factor >.9.

### Emergency

Emergency Battery output - 10 watts for 90 minutes. Maximum mounting height: 19.0ft. Emergency Circuit with Connected Solutions (WSPC, WSPS, NLT1, NXE1, WLXP) shipped standard with leads to connect UL924 compliant device, by others.

### Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

### Finish

Polyester powder coat applied over a multi-stage pre-treatment.

### Lumen Maintenance

Reported:	Calculated:
L70 > 61,000 hours	L90 > 61,000 hours
L70 at > 447,000 hours	L90 at > 110,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

### Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

### Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.



## Seem Linear Luminaires

### Focal Point, LLC

**Final Assembly:** Chicago, IL, USA  
**Life Expectancy:** 10 Year(s)  
**End of Life Options:** Recyclable (55%), Landfill (45%)

**Ingredients:**

Aluminum Alloy 6063; UNS G10080 Steel Alloy; Small Electrical Components - RoHS Compliant<sup>1</sup>; Copper; Polymethyl methacrylate; Steel; Poly[imino(1,6-dioxo-1,6-hexanedyl)imino-1,6-hexanedyl]; **Polyvinyl chloride**; Aluminum Alloy 6061; UNS S30400 Stainless Steel Alloy; Steel manufacture, chemicals; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Nylon 6; **Benzene, ethenyl-, homopolymer, brominated; Bis(pentabromophenyl) ether (decabromodiphenyl ether) (DecaBDE)**; Tris(2-ethylhexyl) trimellitate; Zinc; Methyl methacrylate; Antimony oxide (Antimony trioxide); Kaolin, calcined; Octadecanoic acid, calcium salt; Steel, carbon

<sup>1</sup>LBC Temp Exception RL-002 - Small Electrical Components

**Living Building Challenge Criteria:**

**I-13 Red List:**

<input type="checkbox"/> LBC Red List Free	% Disclosed: 100% at 100ppm
<input type="checkbox"/> LBC Red List Approved	VOC Content: Not Applicable
<input checked="" type="checkbox"/> Declared	

**I-10 Interior Performance:** Not Applicable  
**I-14 Responsible Sourcing:** Not Applicable

FPL-0003  
EXP. 01 FEB 2027  
Original Issue Date: 2024

INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)

Focal Point provides broad flexibility through compatibility with a wide range of indoor lighting control systems. A variety of sensors, nodes, controllers, and drivers can be specified to scale the system and meet the needs of each application across both wired and wireless networks.

Features such as daylight harvesting, occupancy sensing, dimming, and switching help save energy, reduce costs, and enhance occupant comfort. All Connected Solutions luminaires require a compatible building control system.

Controls systems supplied by others. For performance data and additional control system details, please visit the connected solutions manufacturers websites.

Connected Solution	Ordering Code	Model #	Protocol	Compatible Networks (Not all compatible networks may be listed.)	Description	Occupancy & Daylight	Communication to Luminaire	Drivers (Primary drivers are listed in <b>bold</b> . To specify a particular driver please consult factory.)	Driver Type
<b>WATTSTOPPER®</b>									
<p>WSPC adds 0.78" to overall height.</p>	WSPC	EN-ZBHA-CLM-DIM	ZigBee	Wattstopper PLUS	Node	Enabled†	Wireless	<b>Advance by Signify</b>	0-10V standard, consult factory for DALI
	WSPS	EN-CLM-PIR-DD-ZB	ZigBee	Wattstopper PLUS	Sensor	Integrated*	Wireless	<b>Advance by Signify</b>	0-10V standard, consult factory for DALI
	WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Sensor	Integrated*	Wireless (WaveLinx Pro Wireless Area Controller)	<b>Advance by Signify</b>	<b>0-10V</b>
<p>NXE1 adds 1.00" to overall height.</p>	NXE1	NXFM2-LV	NX	NX Distributed Intelligence	Controller	Enabled†	Wired	<b>Optotronic by eldoLED</b>	0-10V
<p>LAW1 adds 0.78" to overall height.</p>	LAW1	A-WN-D01-RF-WH	Clear Connect	Athena Wireless	Node	Enabled†	Wireless	<b>Advance by Signify</b>	0-10V standard, consult factory for DALI
	LAWS	A-WN-D01-OCC-WH	Clear Connect	Athena Wireless	Sensor	Integrated*	Wireless	<b>Advance by Signify</b>	0-10V standard, consult factory for DALI
<p>Connections located under access panel.</p>	NLT1	nEPS-60-IO	nLight	nLight	Controller	Enabled†	Wired	<b>eldoLED ECOdrive, eldoLED SOLOdrive</b>	0-10V

†Enabled: Luminaire supplied with a node/controller. Sensor to be provided by others.

\*Integrated: Luminaire supplied with an installed sensor.

# Ordering Guide



Direct Only Linear Circuitry, Zones & Factory Options

## HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

TOTAL RUN LENGTH: <u>32ft</u>		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
					DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
1	8	1C	1Z					1EM
2	8	2C	2Z					
3	8	2C	2Z					
4	8				1DC			
<b>Totals / Ordering Codes</b>		<b>2C</b>	<b>2Z</b>		<b>1DC</b>			<b>1EM</b>

ORDERING: FSM4L-FL-625LF-35K- **2C2Z** -UNV-LD1-G2- **1DC-1EM** -WH-32ft

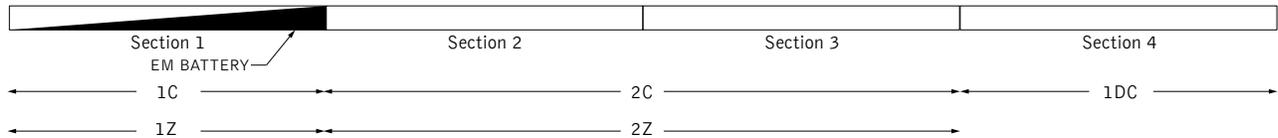

KEY	
<b>C = Switching Circuit</b> Switched Hot / Shared Neutral	<b>DC = Daylight Circuit</b> Switched Hot / Separate Neutral
<b>Z = Dimming Zone</b> Dimming Control Wires	<b>EC = Emergency Circuit</b> Switched Hot / Separate Neutral
<b>DL = Daylight Zone</b> Daylight Dimming Control Wires	<b>EM = Emergency Battery</b> Unswitched Hot / Shared Neutral
	<b>ECD = Emergency Control Device</b> Unswitched Hot / Separate Neutral

## DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

## CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

# Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



FOCAL POINT®

TOTAL RUN LENGTH: _____		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			EM
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			
DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT				ECD			
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
<b>Totals / Ordering Codes</b>								

WORKSHEET

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

## RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.