

Seem® 2 LED Asymmetric

FSM2AL-TF | Trim Flange



BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS




POWER OFF




POWER ON

FOCAL POINT


U - Individual Unit

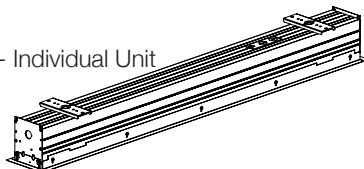


S - Start of Run

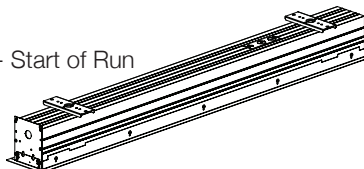

I - Intermediate

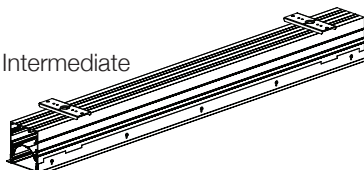

E - End of Run

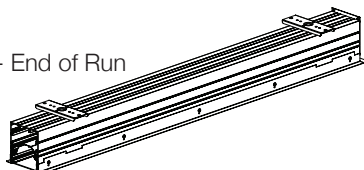


PARTS LIST

SHIPPED IN HARDWARE BAG




Reflector Screw (72010)
(8-18 X 1/4 Self Tapping Screw)

Lens Tool (A09240)
(Affixed To Housing.
One Per Run)





SHIPPED INSTALLED


Lens End Piece
(A08608)



Mounting Bracket
Assembly




Joiner Bracket
Assembly (A11623-01)



Joiner Pin
(70058)



INSTALL
MOUNTING BRACKET
PRIOR TO DRYWALL

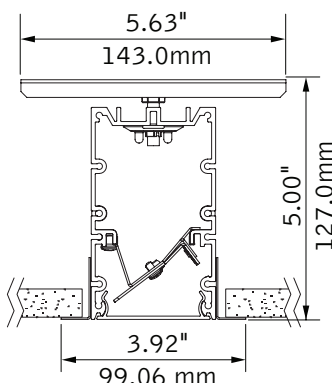

Mounting bracket must be
secured to structure above.

1/4"-20 carriage bolt may be supplied by
others for greater adjustability.

MOUNTING LOCATIONS



Start of Run / Individual



Intermediate / End of Run

Housing Length	A	B	C
2'	2.5"	18"	19"
3'	2.5"	30"	31"
4'	2.5"	42"	43"
5'	2.5"	54"	55"
6'	2.5"	66"	67"
7'	2.5"	78"	79"
8'	2.5"	90"	91"




Mounting location chart is an approximate guide only.



NEW CONSTRUCTION ONLY
Configurations are run specific, please consult factory drawings before beginning installation.



CEILING CUTOUT

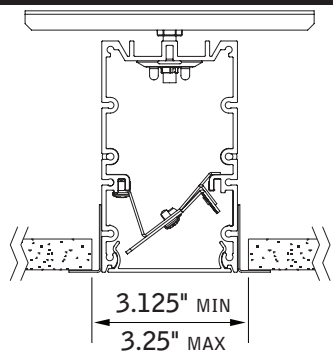


CEILING CUTOUT LENGTH =
NOMINAL RUN LENGTH MINUS 5/16" (+/- 1/16")

EXAMPLE:


12' RUN LENGTH = 11' 11-3/4" CUTOUT LENGTH

1

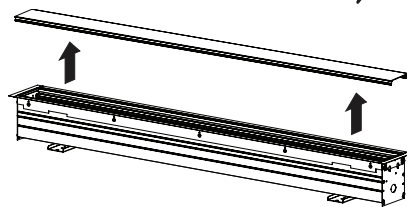


AVOID ALL CONTACT WITH LED SURFACE,
LEDs ARE EASILY DAMAGED!

2

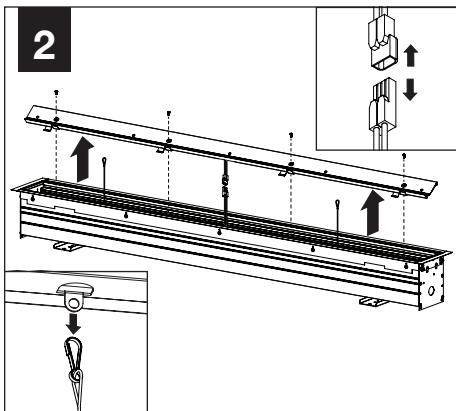


3

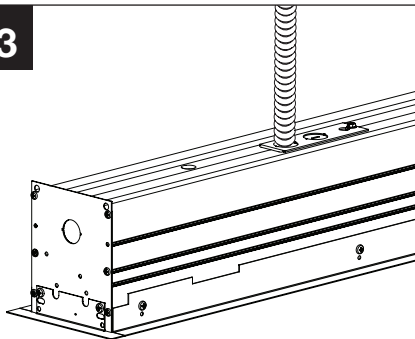


MAKE ELECTRICAL CONNECTIONS


4

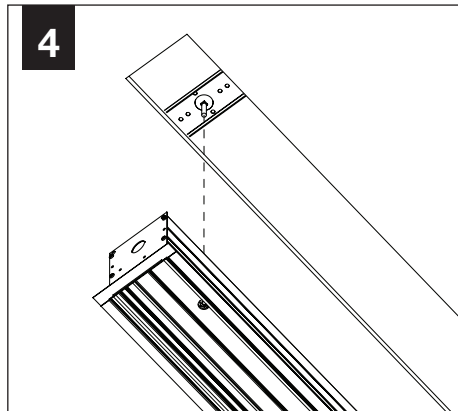

5

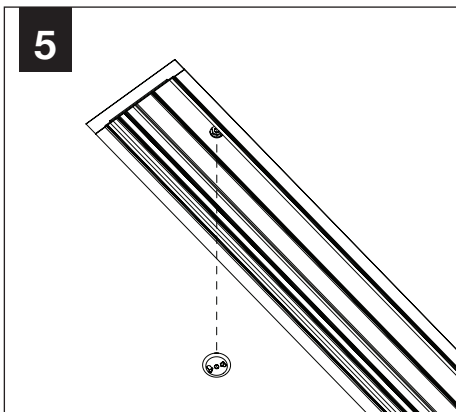

6

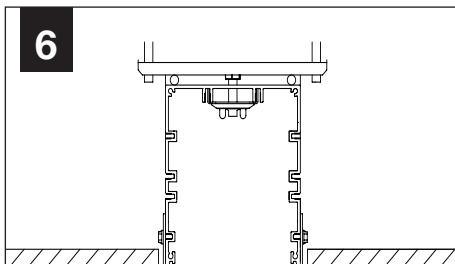


TIGHTEN LUMINAIRE SNUG TO THE CEILING


**REPEAT STEPS 4-8
UNTIL ALL UNITS ARE
IN THE CEILING**

**INDIVIDUAL INSTALLATIONS
SKIP TO STEP 9**


7

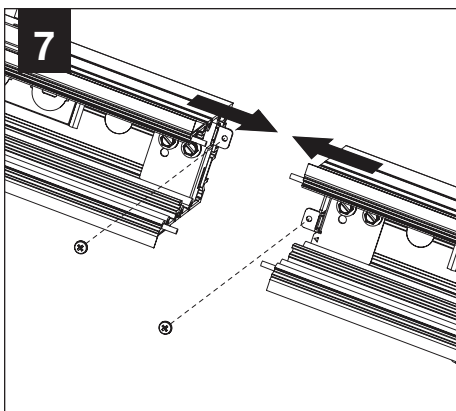







8

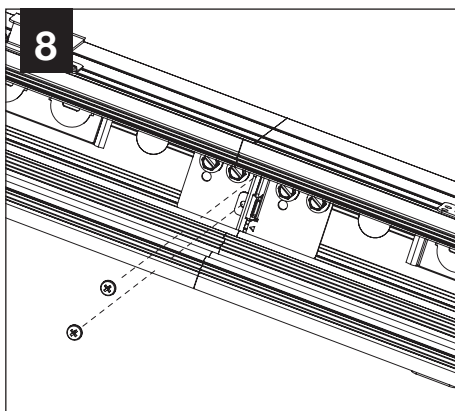

9

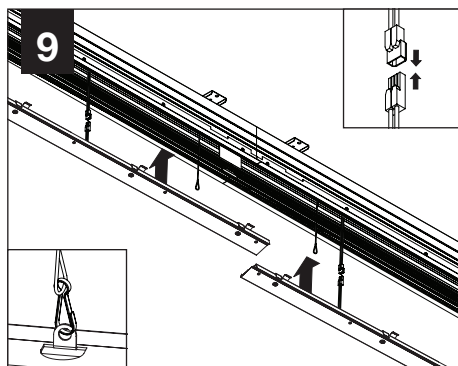

MAKE ELECTRICAL CONNECTIONS

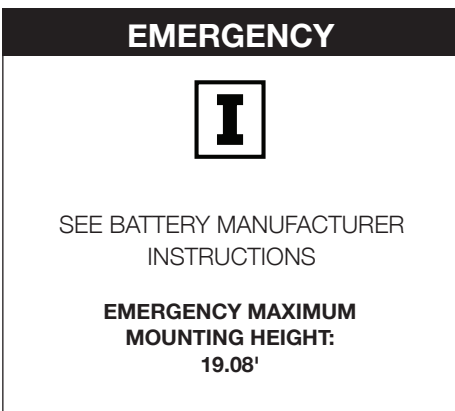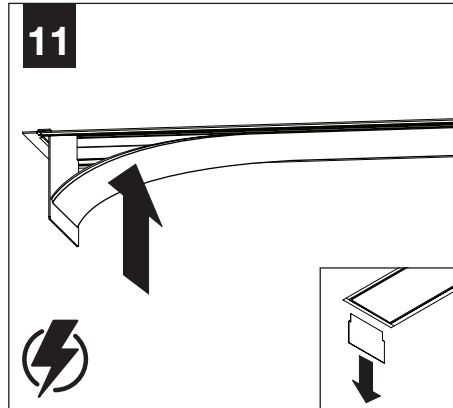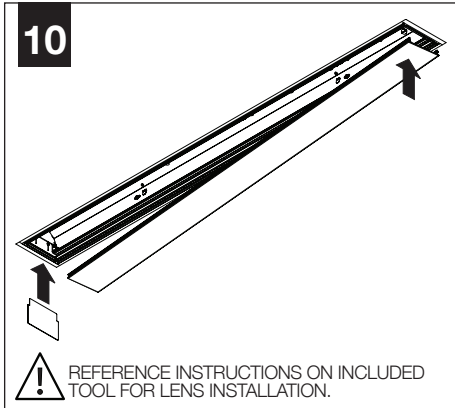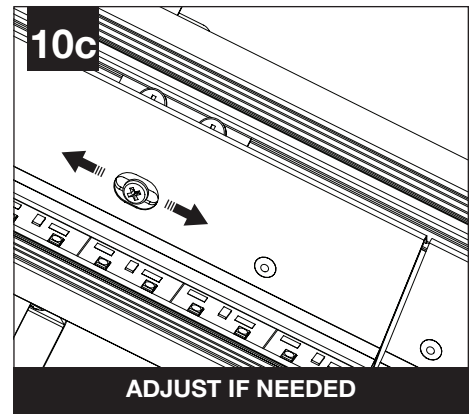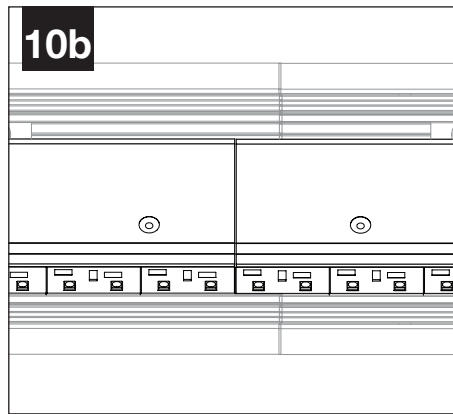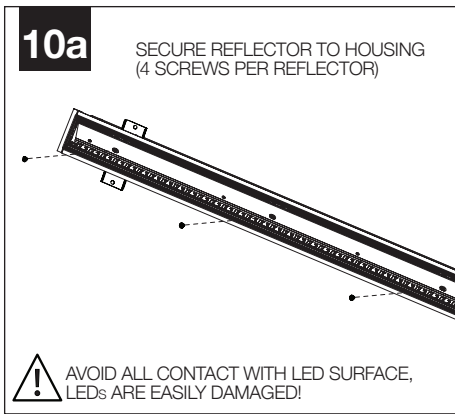

DRIVER SERVICE

