




Seem® 2


LED

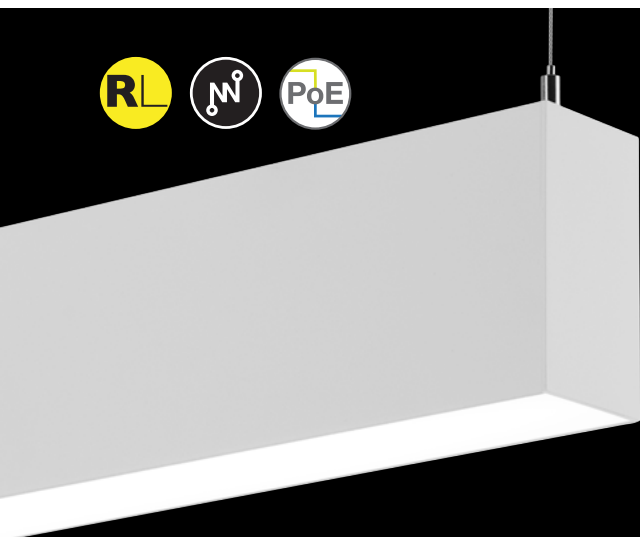

0.5" pop-down lens



1.5" pop-down lens



end detail



wall mount companion



The Naturals collection - Gray Elm shown



recessed companion



wall to ceiling companion




perimeter companion




direct/indirect companion

DIMENSIONAL DATA

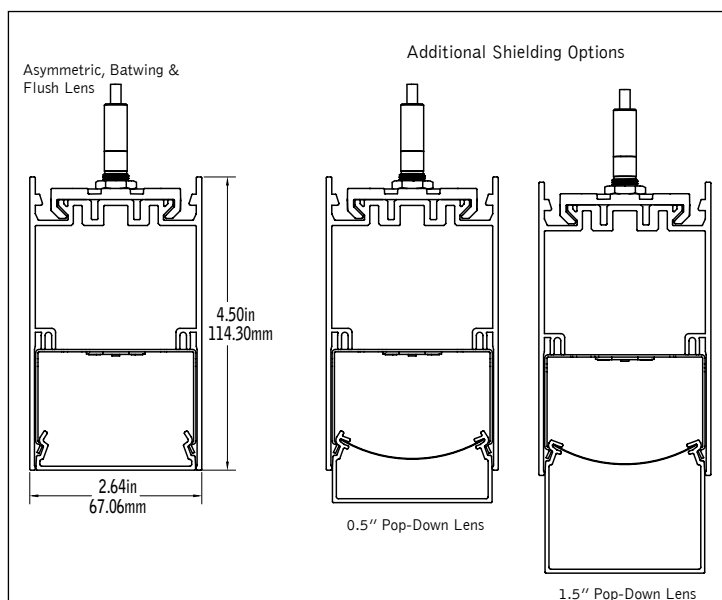

MOUNTING INFORMATION

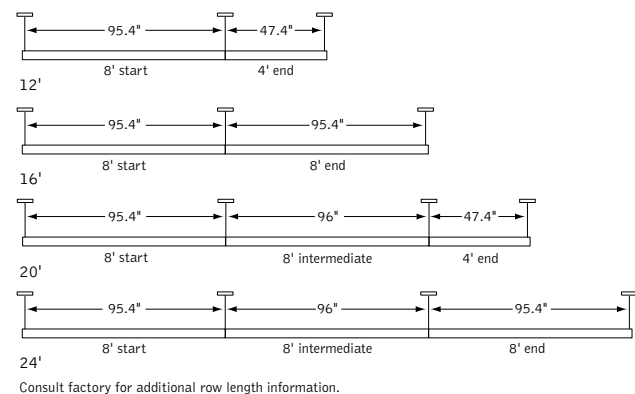

FEATURES

Narrow 2.5" linear direct LED with Asymmetric, Batwing, Flush, 0.5" or 1.5" Pop-Down lens.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.


Individual units and continuous runs in 1' increments.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Available with The Naturals, a series of finishes that exude biophilic beauty.


DISTRIBUTIONS

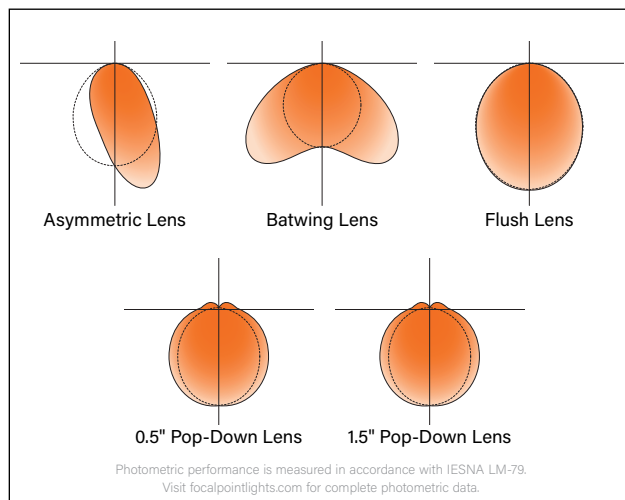

fixture:

project:

MOUNTING INFORMATION

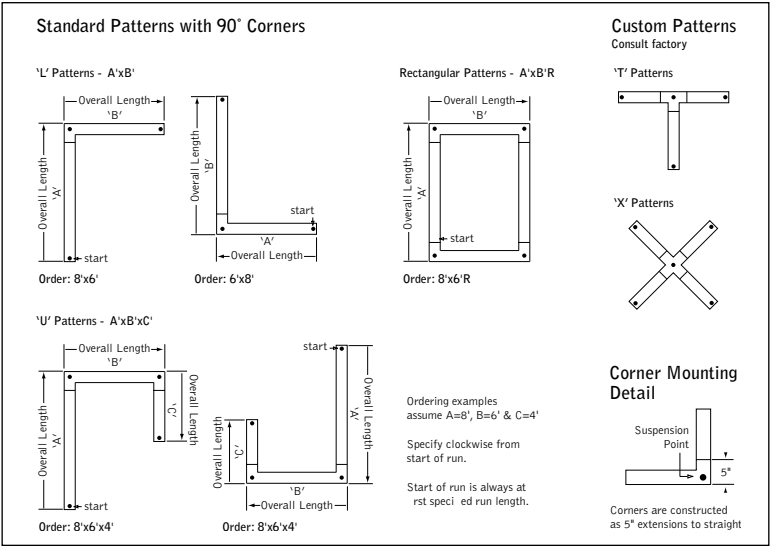

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3 SDCM. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. Cast aluminum end caps. 8' unit weight: 30 lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in matte white powder coat. Extruded acrylic lens with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency

Emergency Battery output - 10 watts for 90 minutes. Maximum mounting height: 20 ft. Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFSD, NLT1, CLM1, NXE1, WLXP) shipped standard with leads to connect UL924 compliant device, by others.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Canopy and cord white as standard. The Naturals: 100% low VOC vinyl.

Lumen Maintenance

Reported: L70 at >61,000 hours Calculated: L70 at 385,000 hours
L90 at >61,000 hours L90 at 103,000 hours
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

See page 3.



Options in orange qualify for the Quickship program. 1000' total.
Refer to Quickship Guide for complete details including EM/EC options.

ORDERING
Luminaire Series

FSM2LS

Seem 2 LED FSM2LS

Shielding

Asymmetric Lens AS

Batwing Lens BW

Flush Lens FL

0.5" Pop-Down Lens PD05

1.5" Pop-Down Lens PD15

Lumen Output

125 Lumens per foot (LD1 & L11 only, 4' minimum.) 125LF

250 Lumens per foot (3' minimum with LH1.) 250LF

375 Lumens per foot 375LF

500 Lumens per foot 500LF

625 Lumens per foot 625LF

750 Lumens per foot 750LF

875 Lumens per foot 875LF

1000 Lumens per foot 1000LF

Color Temperature

2700K, 80+ CRI or 90+ CRI 27K or 927K

3000K, 80+ CRI or 90+ CRI 30K or 930K

3500K, 80+ CRI or 90+ CRI 35K or 935K

4000K, 80+ CRI or 90+ CRI 40K or 940K

Circuits & Zones

1 Circuit, non-emergency 1C

Consult Ordering Guide on page 5 for multiple circuiting and zoning options _C_Z_DL

Voltage

120/277 UNV Volt UNV

347V 347

(LD1 & L11 only)

Low voltage LV

Control System & Dimming Level

0-10V - 10% Dimming LD1

0-10V - 1% Dimming L11

Low Voltage, PoE compatible LVN

(No driver. Not available with EM or EC. LV Voltage only.)

Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming LH1

DALI 1% Dimming D11

(For 750LF, 875LF & 1000LF consult factory.)

Wattstopper DLM - 1% Dimming** DLM1

Wattstopper Fixture Sensor** LMFS1

Low Density - 1% Dimming

See sensor layout guide

Wattstopper Fixture Sensor** LMFSD

High Density - 1% Dimming

See sensor layout guide

Lutron Athena Wireless Node** 2 LAW1

Lutron Athena Wireless Sensor** 2 LAWS

(Remote mounted sensor, See sensor layout guide)

Acuity nLight - 1% Dimming** NLT1

(For 750LF, 875LF & 1000LF consult factory.)

Encelium CLM Connected Lighting Module - 1% Dimming** CLM1

Current NX Enabled - 1% Dimming** NXE1

WaveLinX Pro - 1% Dimming** WLXP

See sensor layout guide

**(3' minimum length, with ECD/EM - 7' minimum.)

(Not available with pop-down lenses.)

2(0-10V standard, consult factory for DALI)

Mounting

24" Cable Suspension C24_

48" Cable Suspension C48_

96" Cable Suspension C96_

(Specify canopy color, see finishes page for options.

Example: White = C24WH.)

(Specify one of the following in place of "C"

J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)

Surface Mount SM

(Not available with LAW1, CLM1, DLM1, NLT1 or NXE1)

Factory Options

Black Cord BKCD

Daylight Circuit _DC

Emergency Circuit _EC

Emergency Battery Pack† _EM

Emergency Control Device† _ECD

†(3' minimum, 120/277 Volt only)

Finish

(See finishes page for The Naturals options)

Black BK

Titanium Silver TS

Matte White Housing WH

Luminaire Length

Specify luminaire/row length in 1' increments X'

(2' minimum. Leave blank for patterns.

Smaller increments available, consult factory.)

Pattern Options

(2' minimum length)






'L' pattern A' x B'

'U' pattern A' x B' x C'

Rectangular pattern A' x B' R

(Consult factory for other pattern options)

4' PERFORMANCE CHART

Shielding		Lumens per Foot	Delivered Lumens	Tested System Watts	LPW
Asymmetric Lens		125LF	500	5.64	89
		250LF	1000	8.24	121
		375LF	1500	11.22	134
		500LF	2000	14.53	138
		625LF	2500	17.93	139
		750LF	3000	22.22	135
		875LF	3500	26.00	135
Batwing Lens		125LF	500	5.63	89
		250LF	1000	8.27	121
		375LF	1500	11.26	133
		500LF	2000	14.62	137
		625LF	2500	18.02	139
		750LF	3000	22.32	134
		875LF	3500	26.15	134
Flush Lens		125LF	500	5.48	91
		250LF	1000	8.87	113
		375LF	1500	12.17	123
		500LF	2000	15.84	126
		625LF	2500	19.65	127
		750LF	3000	24.45	123
		875LF	3500	28.65	122
Pop Down 0.5" Lens		1000LF	4000	33.12	121
		125LF	500	5.72	87
		250LF	1000	9.35	107
		375LF	1500	12.91	116
		500LF	2000	16.89	118
		625LF	2500	21.70	115
		750LF	3000	26.14	115
Pop Down 1.5" Lens		875LF	3500	30.69	114
		1000LF	4000	35.43	113
		125LF	500	5.56	90
		250LF	1000	9.02	111
		375LF	1500	12.40	121
		500LF	2000	16.17	124
		625LF	2500	20.06	125
		750LF	3000	24.96	120
		875LF	3500	29.33	119
		1000LF	4000	33.72	119

Based on 3500K, 4' length. Lumen multipliers:
Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

Declare.

Seem 2
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 10 Year(s)
End of Life Options: Recyclable (55%), Landfill (45%)

Ingredients:

Aluminum; Steel; Small Electrical Components - RoHS
Compliant¹; Polymethyl methacrylate; UNS G1008; Copper; Zinc;
Steel, carbon; **Polyvinyl chloride**; Poly[imino(1,6-dioxo-1,6-
hexanediyl)imino-1,6-hexanediyl]; Methyl methacrylate; **Benzene,**
ethenyl-, homopolymer, brominated; Bis(pentabromophenyl)
ether (decabromodiphenyl ether) (DecaBDE); Polyethylene;
Polypropylene; Steel manufacture, chemicals

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:


















I-13 Red List:
☐ LBC Red List Free % Disclosed: 100% at 100ppm
☐ LBC Red List Approved VOC Content: Not Applicable
☒ Declared

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable

FPL-0003
EXP. 01 JAN 2026
Original Issue Date: 2024

INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†

Connected Solution	Ordering Code	Model #**	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers
  WATTSTOPPER[®]	DLM1	LMFC-011	DLM	DLM	Enabled	No	Wired 	Advance by Signify. Optotronic by eldoLED
	LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Enabled	No	Wireless	Advance by Signify
	LMFSD	LMFS-601						Optotronic by eldoLED (Dexal)
 	WLXP	OEM-WAA	WaveLinX Wireless	WaveLinX Pro Trellix	Enabled	No	Wireless (WaveLinX Pro Wireless Area Controller)	Advance by Signify
 	D11	Specified Driver	DALI	Crestron Züm Wireless & SpaceBuilder	Enabled	No	Wired	eldoLED ECoDrive
	L11		0-10V					Advance by Signify
 	CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled	No	Wireless	Optotronic by eldoLED Advance by Signify
 	LAW1	A-WN-D01-RF-WH	DALI, 0-10V	Athena Wireless	Enabled	No	Wireless	Advance by Signify
	LAWS	A-WN-D01-OCC-WH	DALI, 0-10V	Athena Wireless	Integrated	No	Wireless	Advance by Signify
	LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	No	Wired	Lutron Hi-Lume
 	NLT1	nEPS-60-IO	nLight	nLight	Enabled	No	Wired 	eldoLED ECoDrive, eldoLED SOLOdrive
 	NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled	No	Wired 	Optotronic by eldoLED

*Not all compatible networks may be listed. **For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.
†Controls systems supplied by others.


Finishes



STANDARD FINISHES



THE NATURALS (25% SCALE)

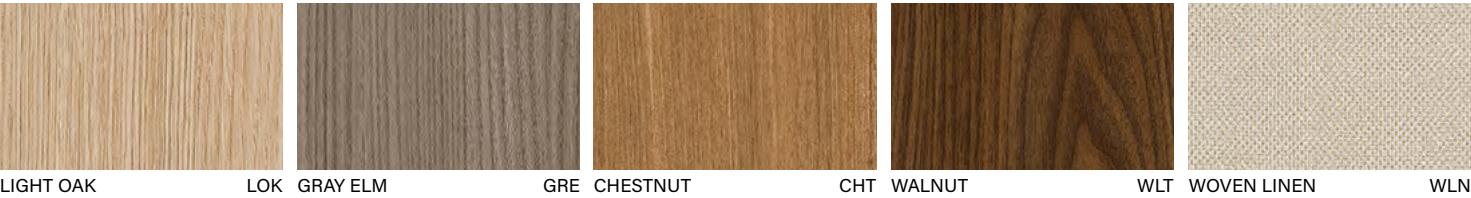

Ordering Guide

Direct Only Linear Circuitry, Zones & Factory Options



HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 32ft		JOB NAME:			FIXTURE TYPE:			
	HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
						SEPARATE ELECTRICAL FEEDS			EM
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
	1	8	1C	1Z					1EM
	2	8	2C	2Z					
	3	8	2C	2Z					
	4	8				1DC			
	Totals / Ordering Codes		2C	2Z		1DC			1EM

ORDERING: FSM4L-FL-625LF-35K- 2C2Z -UNV-LD1-G2- 1DC-1EM -WH-32ft

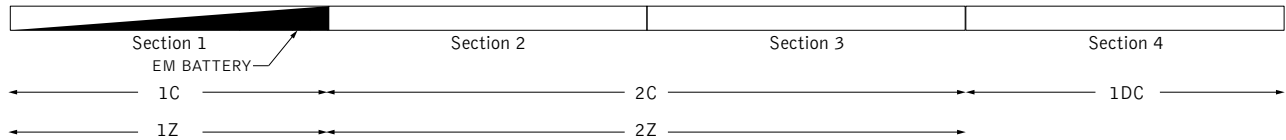

KEY

C = Switching Circuit
Switched Hot / Shared Neutral

Z = Dimming Zone
Dimming Control Wires

DL = Daylight Zone
Daylight Dimming Control Wires

DC = Daylight Circuit
Switched Hot / Separate Neutral

EC = Emergency Circuit
Switched Hot / Separate Neutral

EM = Emergency Battery
Unswitched Hot / Shared Neutral

ECD = Emergency Control Device
Unswitched Hot / Separate Neutral

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



TOTAL RUN LENGTH: _____		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
						DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
Totals / Ordering Codes								

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.