

# Seem® 4 LED Asymmetric

FSM4AL-FFL-XF | Mud-In Drywall



FOCAL POINT®



## BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

## INSTRUCTION KEY



**ATTENTION**



**SEE ADDITIONAL INSTRUCTIONS**




**POWER OFF**




**POWER ON**


## FOCAL POINT

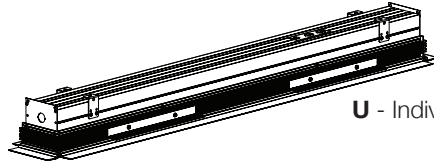


**U** - Individual Unit

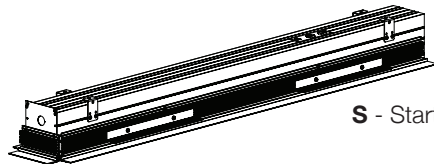

**S** - Start of Run

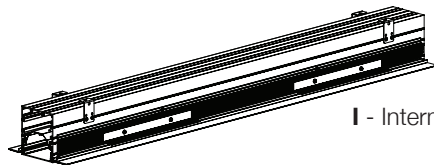


**I** - Intermediate

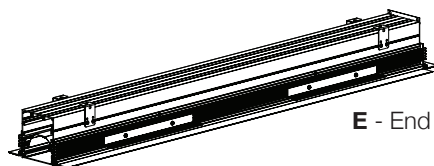


**E** - End Of Run

Backer Flange  
(May Be Pre-Installed  
Or Shipped Loose)




Mud Flange  
(Shipped Loose)



CONFIGURATIONS ARE  
RUN SPECIFIC, CONSULT  
FACTORY DRAWINGS BEFORE  
BEGINNING INSTALLATION.

## PARTS LIST

### INCLUDED HARDWARE



Lens Tool  
(A09052-02)  
(Affixed To Housing.  
One Per Run)



Housing Spacer  
(11699)



Reflector (70008)  
(6-32 x 5/16 Pan-Head  
Machine Screw)




Mud Flange (70005)  
(8-32 x 5/16 Flat  
Undercut Head Screw)




Backer Flange (72001)  
(8-32 x 3/8 Washer  
Hex Head Screw)




Tie-Wire Bracket  
Screw (72010)  
(8-18 x 1/4 Self Tapping Screw)



Tie-Wire  
Bracket  
(12547)



Joiner Bracket  
(Regress Lens)  
(A20081-01)



Joiner Bracket  
(11920)

Joiner Bracket  
(11849)




Alignment Bracket  
(Regress Lens)  
(A22092-01)



Alignment  
Bracket Screw  
(Regress Lens)  
(72029)




Alignment Pin  
(Regress Lens)  
(22372)





Lens End Piece  
(A07670)



## BACKER FLANGE PLACEMENT GUIDE

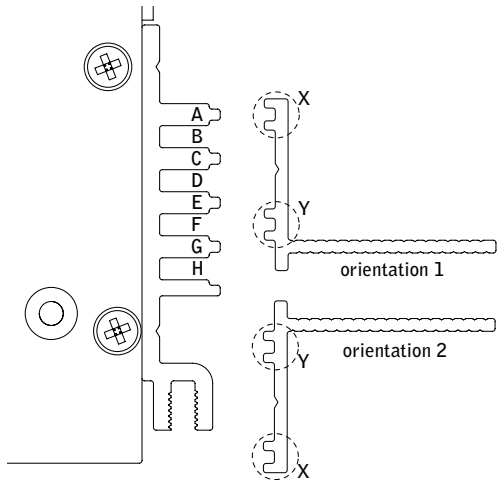

| DRYWALL THICKNESS | ORIENTATION | GUIDE POINT | POSITION |
|-------------------|-------------|-------------|----------|
| 3/8"              | 1           | X           | F        |
| 1/2"              | 1           | X           | E        |
| 5/8"              | 1           | X           | D        |
| 3/4"              | 1           | X           | C        |
| 7/8"              | 1           | X           | B        |
| 1"                | 1           | X           | A        |
| 1 1/8"            | 1           | Y           | G        |
| 1 1/4"            | 2           | Y           | F        |
| 1 3/8"            | 2           | Y           | E        |
| 1 1/2"            | 2           | Y           | D        |
| 1 5/8"            | 2           | Y           | C        |
| 1 3/4"            | 2           | Y           | B        |
| 1 7/8"            | 2           | Y           | A        |
| 2"                | 2           | X           | E        |
| 2 1/8"            | 2           | X           | D        |



**LUMINAIRE MUST BE INSTALLED PRIOR TO DRYWALL**

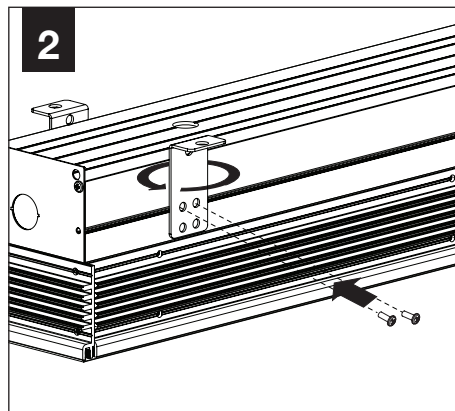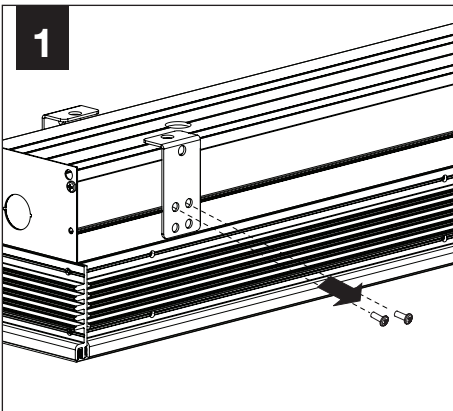


**3**


Using the backer flange placement guide ABOVE to determine the proper placement of the backer flange for your drywall thickness.

**IF BACKER FLANGES WERE PRE-INSTALLED SKIP TO STEP 5**


**4**

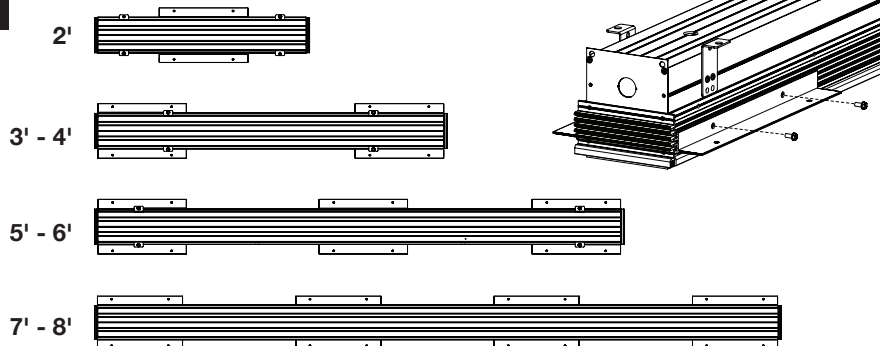










**5**





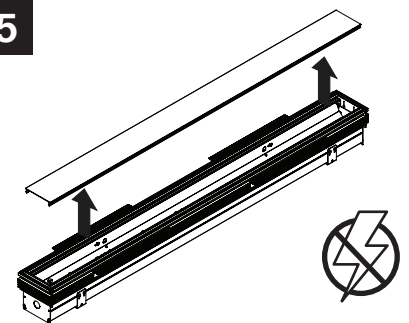


**! AVOID ALL CONTACT WITH LED SURFACE, LEDs ARE EASILY DAMAGED!**

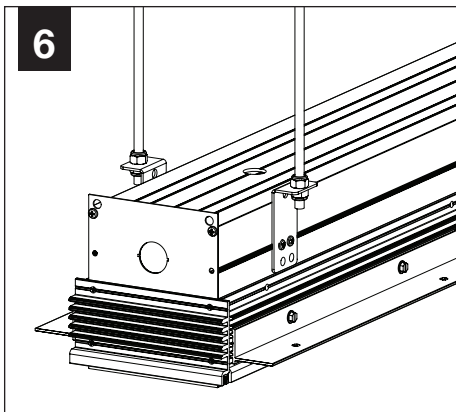

**INDIVIDUAL INSTALLATIONS**  
Skip To Step 11

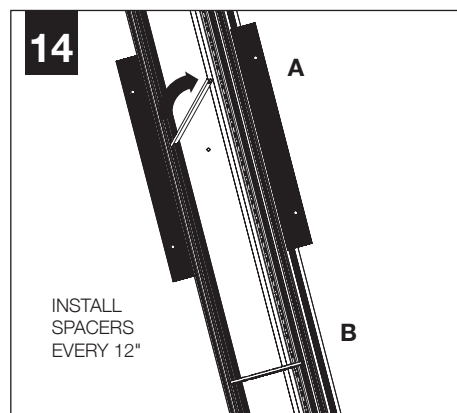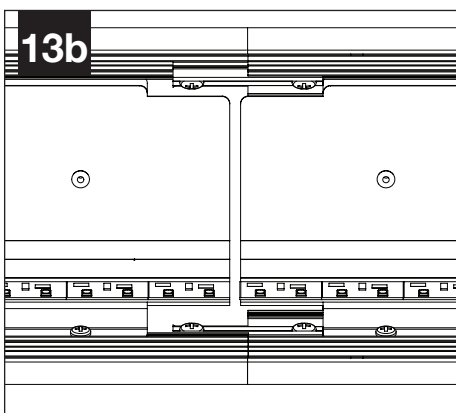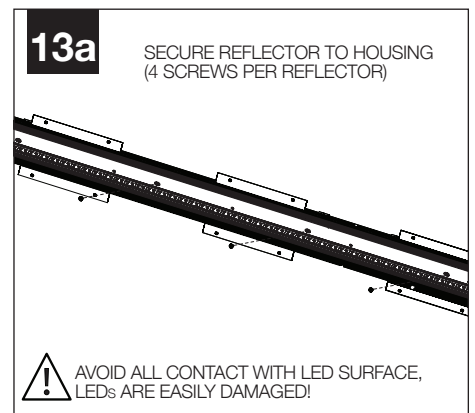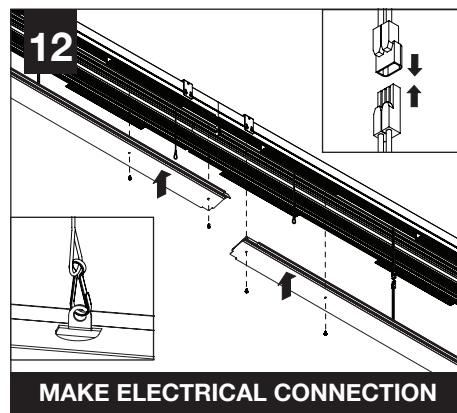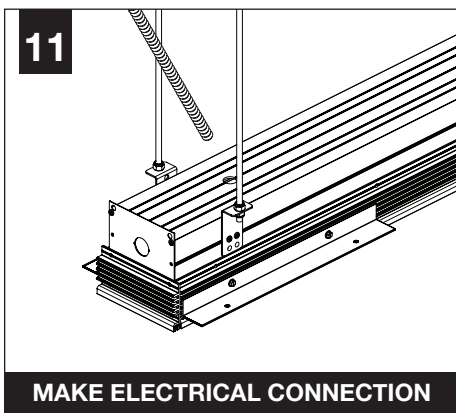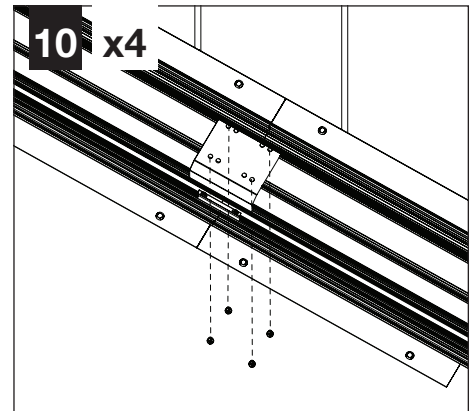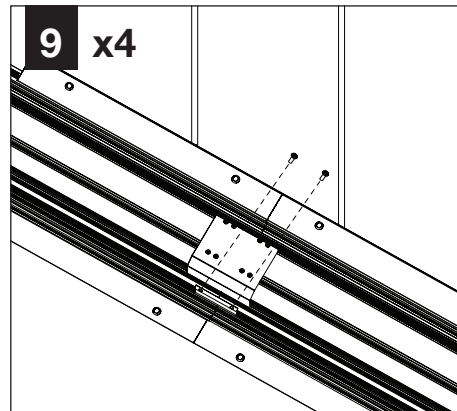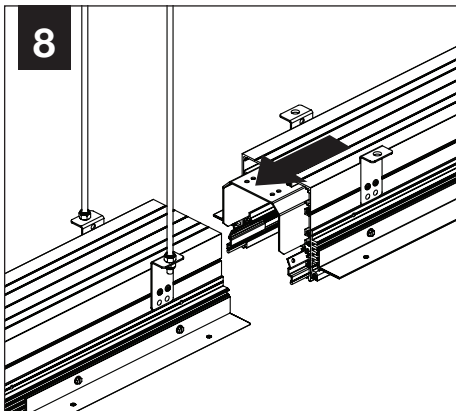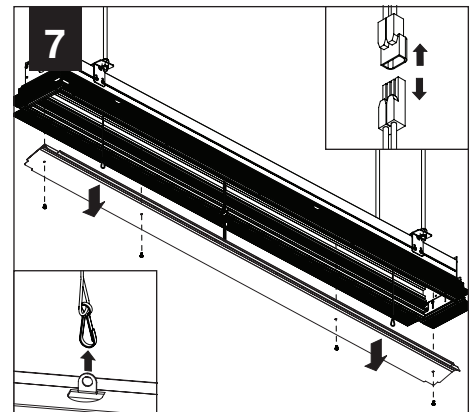

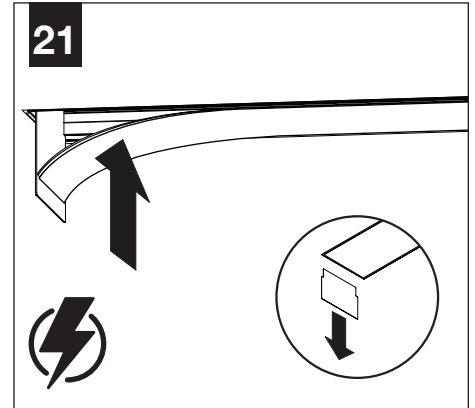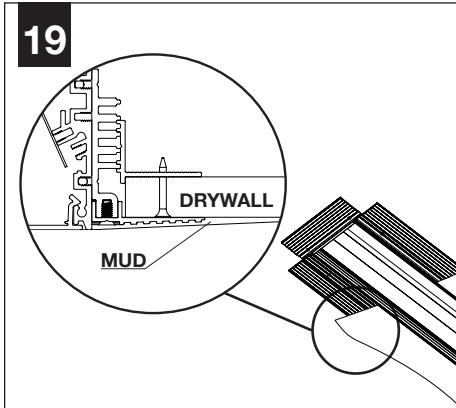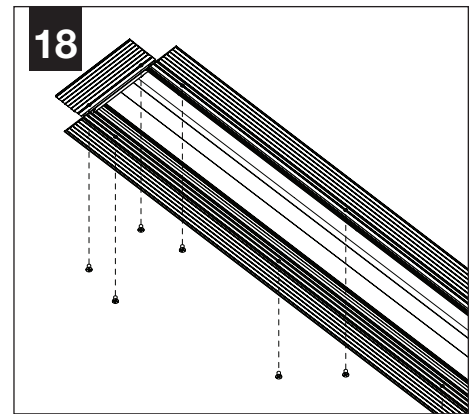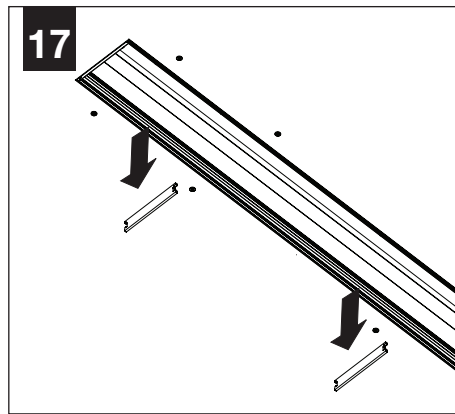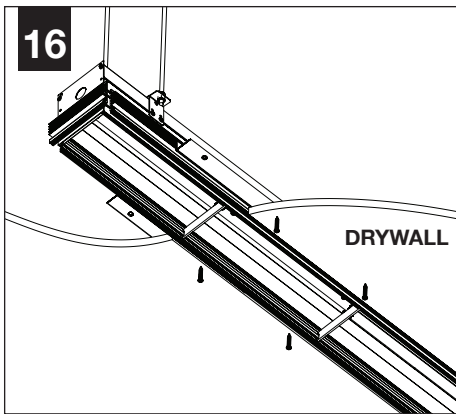

## EMERGENCY



SEE BATTERY MANUFACTURER  
INSTRUCTIONS

**EMERGENCY MAXIMUM  
MOUNTING HEIGHT:  
18.39'**

## DRIVER SERVICE

