

Seem® 4 Grid Ceiling

LED



regress lens




drywall/hard ceiling companion



wall to ceiling companion




perimeter companion



suspended companion

DIMENSIONAL DATA

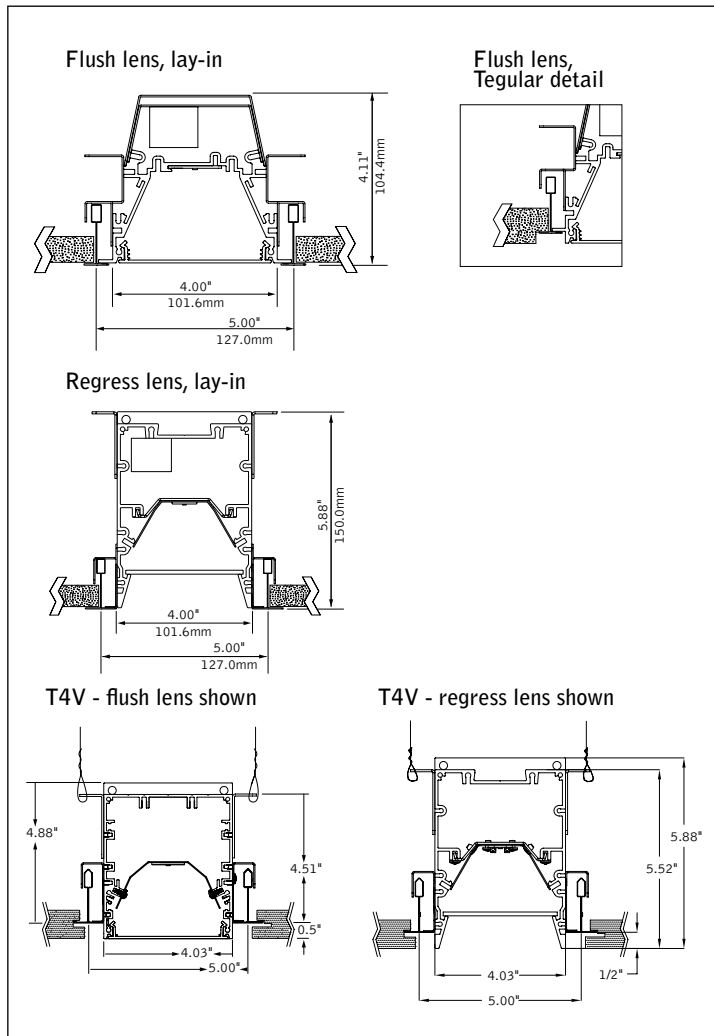

FEATURES

4" aperture recessed slot LED integrates with grid ceilings for a clean, unobtrusive aesthetic.

Individual units and continuous runs in 1" increments.

Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.


LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

Preferred Light: Lighting for better color rendition and human preference.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.


DISTRIBUTIONS

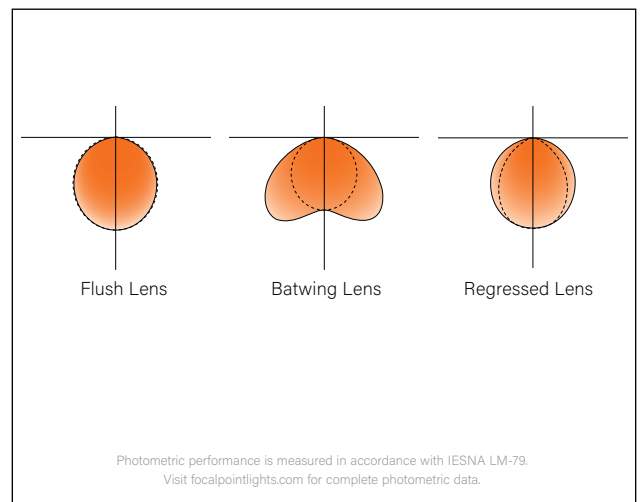

fixture:

project:

DETAILS

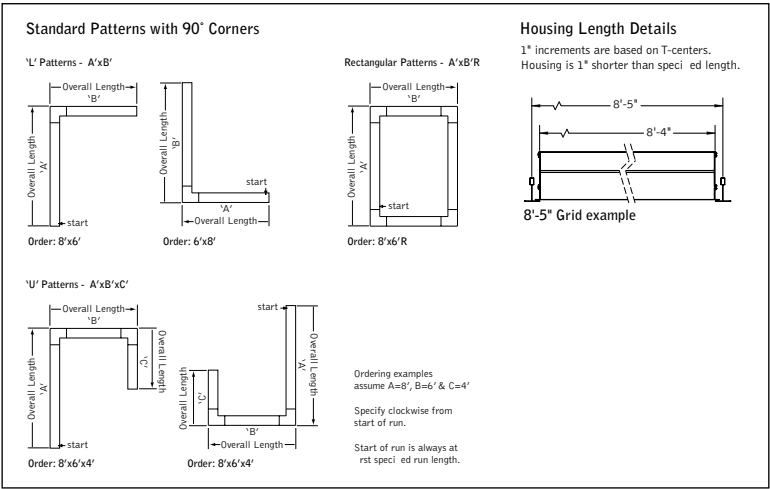

SPECIFICATIONS
LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80, 3 SDCM. 3500K and 4000K with CRI-90 have a cyanosis observation index (COI) of 3.3 or less. LED modules are replaceable from below. Flush lens driver access from above. Regress lens driver access from below.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Steel driver compartment, flush lens only. Flush lens weights: 4' unit: 11 lbs., 8' unit: 22 lbs.
Regress lens weights: 4' unit: 20 lbs., 8' unit: 40 lbs.

Optic

Extruded acrylic lens .085" thick with satin finish, up to 8' continuous. Regress lens .118" thick acrylic lay-in lens and 22 Ga. reflector finished in High Reflectance White powder coat.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor >.9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency

Emergency Battery output - 10 watts for 90 minutes. Maximum mounting height: 19.2ft.
Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFS1, NLT1, ENL1, CLM1, NXE1, WLXP) shipped standard with leads to connect UL924 compliant device, by others.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 > 61,000 hours Calculated: L70 at > 480,000 hours
L90 > 61,000 hours L90 at > 128,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

See page 3.

ORDERING

Luminaire Series

Seem 4 LED

Shielding

Batwing Lens

Flush Satin Lens

Regress Lens

Regress High Performance Lens

Lumen Output

275 Lumens per foot

(Not available with LH1.)

375 Lumens per foot

(Not available with LH1.)

625 Lumens per foot

(BW, FL & SR 3' minimum with LH1.)

875 Lumens per foot

(SR & SRXP 3' minimum with LH1. SR & SRXP with LH1 not available on patterns.)

1000 Lumens per foot

1125 Lumens per foot

1250 Lumens per foot

Color Temperature

2700K, 80+ CRI or 90+ CRI

3000K, 80+ CRI or 90+ CRI

3500K, 80+ CRI or 90+ CRI

4000K, 80+ CRI or 90+ CRI

3500K, Preferred Light

(BW & FL Lens only. 6" increments. Patterns not available.)

Circuits & Zones

1 Circuit, non-emergency

Consult Ordering Guide on page 5 for multiple circuiting and zoning options

Voltage

120/277 UNV Volt

Low Voltage

Control System & Dimming Level

0-10V - 10% Dimming

0-10V - 1% Dimming

Low Voltage, PoE compatible

(No driver. Not available with EM or EC. LV Voltage only.)

Lutron Hi-Lume EcoSystem (LDE1) -

1% Dimming

DALI 1% Dimming

(1000LF max.)

Wattstopper DLM - 1% Dimming**

(Not available with CP)

Wattstopper Fixture Sensor**

Low Density - 1% Dimming

See sensor layout guide

Wattstopper Fixture Sensor**

High Density - 1% Dimming

See sensor layout guide

Acuity nLight - 1% Dimming**

(Not available with CP)

Enlighted Smart Sensor - 1% Dimming**

See sensor layout guide

Encelium CLM Connected Lighting Module - **

1% Dimming

Current NX Enabled - 1% Dimming**

(Not available with CP)

WaveLinx Pro - 1% Dimming**

See sensor layout guide

(3' minimum length, with ECD/EM - 7' minimum.)

Ceiling Configuration

Std. 15/16" Lay-in or Std. 15/16" Regular

Std. 9/16" Lay-in or Std. 9/16" Regular

9/16" Slot-tee Regular

Tall 15/16" Lay-in or Tall 15/16" Regular

Tall 15/16" Regular for specialty ceilings

(0.5" drop)

Tall 9/16" Lay-in or Tall 9/16" Regular

Node 9/16" Regular

Factory Options

(See Ordering Guide on page 5 for ordering details for DC, EC, EM & ECD.)

Chicago Plenum

(Not available with Flex Whip)

Daylight Circuit

Emergency Circuit

Emergency Battery Pack†

Emergency Control Device†

†(4' minimum. 6' minimum with patterns. Not available at corners. 120/277 Volt only.)

6' New York City Flex Whip (120V)

6' New York City Flex Whip (277V)

6' Flex Whip

Finish

Matte White Housing

Luminaire Length

Specify luminaire/row length in 1" increments

(2' minimum, lengths are nominal 1" increments based on T-centers. Housing length is 1" shorter than specified. Leave blank for patterns. Smaller increments available, consult factory. Individual units cannot be joined in the field.)

Pattern Options

(4' minimum length)

'L' pattern

'U' pattern

Rectangular pattern

(Consult factory for other pattern options)

FSM4L

FSM4L

BW

FL

SR

SRXP

275LF

375LF

625LF

875LF

1000LF

1125LF

1250LF

27K or 927K

30K or 930K

35K or 935K

40K or 940K

P35K

1C

_C_Z_DL

UNV

LV

LD1

L11

LVN

LH1

D11

DLM1

LMFS1

LMFSD

NLT1

ENL1

CLM1

NXE1

WLXP

G1 or T1

G2 or T2

G3

G4 or T4

T4V

G5 or T5

T6

CP

_DC

_EC

_EM

_ECD

FNY1

FNY2

FW

WH



ft

in





Options in orange qualify for the Quickship program. 1000' total, 48' maximum per pattern section. Refer to Quickship Guide for complete details including EM/EC options.

4' PERFORMANCE CHART

			LPW	
Lumens Output	Delivered Lumens	Tested System Watts		
			BW	FL
275	1100	10	111	108
375	1500	13	121	119
625	2500	22	117	115
875	3500	32	116	114
1000	4000	37	115	112
1125	4500	41	113	110
1250	5000	46	112	110



















Based on 3500K, 80 CRI, 4' lengths. Lumen multipliers: Preferred Light = 0.65, 90+ CRI = 0.87.
Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

4' PERFORMANCE CHART - REGRESS

			LPW	
Lumens Output	Delivered Lumens	Tested System Watts		
			SR	SRXP
275	1100	12	79	98
375	1500	16	84	109
625	2500	26	84	110
875	3500	39	80	105
1000	4000	46	77	101
1125	4500	53	76	101
1250	5000	59	75	99

Based on 3500K, 80 CRI, 4' lengths. Lumen multipliers: Preferred Light = 0.65, 90+ CRI = 0.87.
Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†

Connected Solution	Ordering Code	Model #**	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers	
 WATTSTOPPER®		DLM1	LMFC-011	DLM	DLM	Enabled	No	Wired 	Advance by Signify, Optotronic by eldoLED
		LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Enabled	No	Wireless	Advance by Signify
		LMFSD	LMFS-601						Optotronic by eldoLED (Dexal)
		WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Enabled	No	Wireless (WaveLinx Pro Wireless Area Controller)	Advance by Signify
		D11	Specified Driver	DALI	Crestron Züm Wireless & SpaceBuilder	Enabled	No	Wired	eldoLED ECOdrive
		L11		0-10V					Advance by Signify
		CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled	No	Wireless	Optotronic by eldoLED Advance by Signify
		ENL1	SU-5E-IOT	Enlighted RF	Enlighted	Integrated	Yes	Wireless	Advance by Signify
		LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	No	Wired	Lutron Hi-Lume
		NLT1	nEPS-60-IO	nLight	nLight	Enabled	No	Wired 	eldoLED ECOdrive, eldoLED SOLOdrive
		NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled	No	Wired 	Optotronic by eldoLED

*Not all compatible networks may be listed. **For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.
†Controls systems supplied by others.

Ordering Guide

Direct Only Linear Circuitry, Zones & Factory Options



HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 32ft		JOB NAME:			FIXTURE TYPE:			
	HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
						SEPARATE ELECTRICAL FEEDS			EM
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
	1	8	1C	1Z					1EM
	2	8	2C	2Z					
	3	8	2C	2Z					
	4	8				1DC			
	Totals / Ordering Codes		2C	2Z		1DC			1EM

ORDERING: FSM4L-FL-625LF-35K- 2C2Z -UNV-LD1-G2- 1DC-1EM -WH-32ft

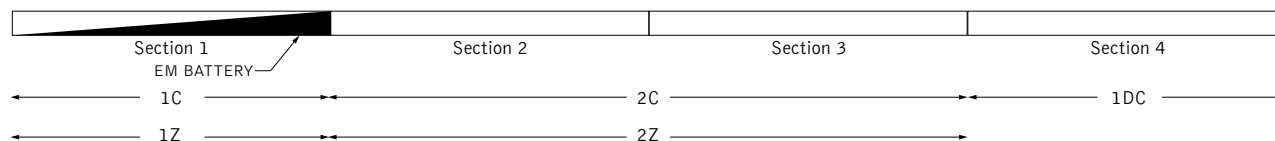

KEY

C = Switching Circuit
Switched Hot / Shared Neutral

Z = Dimming Zone
Dimming Control Wires

DL = Daylight Zone
Daylight Dimming Control Wires

DC = Daylight Circuit
Switched Hot / Separate Neutral

EC = Emergency Circuit
Switched Hot / Separate Neutral

EM = Emergency Battery
Unswitched Hot / Shared Neutral

ECD = Emergency Control Device
Unswitched Hot / Separate Neutral

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



TOTAL RUN LENGTH: _____		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
						DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
Totals / Ordering Codes								

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.