


softlite™ III 2x4

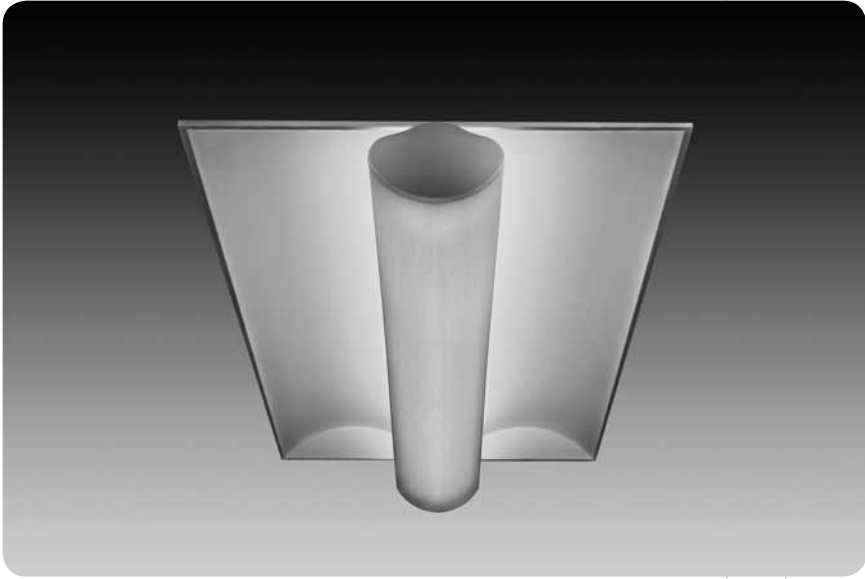

features

2'x4' semi-recessed indirect with center basket below the ceiling.

High reflectance, low gloss Matte White finish controls glare and provides high efficiency.


Shallow housing reflectors extend less than 3" above ceiling.

Two-piece endcaps provide row-mount capability for all Softlite™ III configurations.


Diffuser assembly is retained by self-aligning torsion springs and pulls down for easy relamping.

Softlite™ III provides high angle uniform distribution ideal for general illumination.


dimensional data

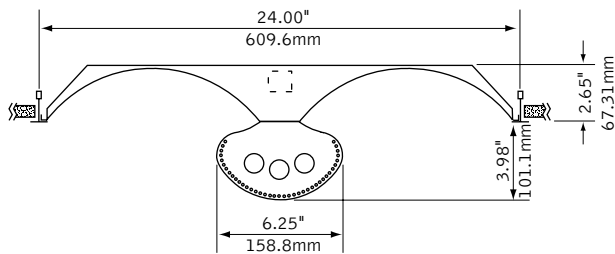


lamping options

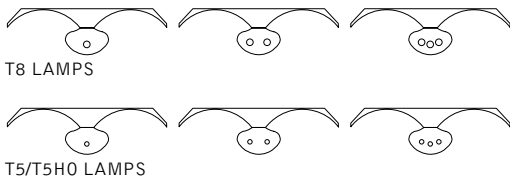

shielding options & details

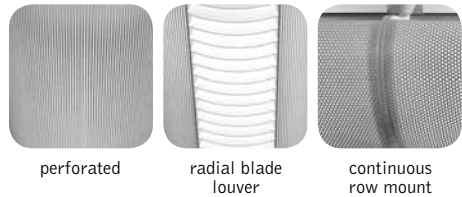


companion luminaire



performance

3-Lamp T8
73% Efficiency
1866 cd @ 0°




Visit focalpointlights.com for complete photometric data.

fixture:
project:


mounting information

grid

specify "G" for flat 9/16" and 15/16" tee or "ST" for 9/16" slot tee grid types.




"G" flat tee




"ST" slot tee

drywall frame kit

specify "DF" Drywall Frame Kit for drywall ceiling conditions.



Use tie-wire or screws to secure frame kit.



cut out dimensions:
2': Min: 24.25"
Max: 24.563"
4': Min: 48.25"
Max: 48.563"

specifications

construction

One-piece 20 Ga. steel reflector and housing.
Die-cast aluminum end caps support perforated lamp shield.
Optional radial blade louver: .75"H x 1" frequency fabricated of 20 Ga. steel with acrylic lens insert.
Bottom and top access 20 Ga. steel ballast compartment.

weight: 28 lbs

optic

20 Ga. steel reflector finished in Matte Satin White powder coat.
Lamps are shielded by detachable 22 Ga. steel perforated lamp shield with acrylic lens insert.

electrical

Electronic ballasts are thermally protected and have a Class "P" rating.
Optional dimming ballasts available.
Consult factory for dimming specifications and availability.
UL and cUL listed.

finish

Polyester powder coat applied over a 5-stage pre-treatment.

ordering

luminaire series	Softlite III	FS3	<u>FS3</u>
nominal size	2' x 4'	24	<u>24</u>
distribution	Bi-Directional	B	<u>B</u>
lamp quantity	One Lamp	1	<u>1</u>
	Two Lamps	2	<u>2</u>
	Three Lamps	3	<u>3</u>
lamp type	T8	T8	<u>T8</u>
	T5	T5	<u>T5</u>
	T5H0	T5H0	<u>T5H0</u>
ballast	Electronic Instant Start <20% THD (T8 only)	E	<u>E</u>
	Electronic Program Start <10% THD	S	<u>S</u>
	Electronic Dimming Ballast*	D	<u>D</u>
voltage	120 Volt	120	<u>120</u>
	277 Volt	277	<u>277</u>
	347 Volt	347	<u>347</u>
mounting	Grid	G	<u>G</u>
	Slot Tee	ST	<u>ST</u>
	("ST" must be indicated for slot tee application. "G" luminaires are not compatible with slot tee ceiling systems.)		
shielding	Perforated Shield	PS	<u>PS</u>
	Radial Blade Louver	RLP	<u>RLP</u>
factory options	Chicago Plenum	CP	<u>CP</u>
	Drywall Frame Kit	DF	<u>DF</u>
	(Cut out dimensions: Min: 24.25"/Max: 24.563" Min: 48.25"/Max 48.563")		
	Emergency Battery Pack*	EM	<u>EM</u>
	Earthquake Clips	EQ	<u>EQ</u>
	HLR/GLR Fuse	FU	<u>FU</u>
	Flex Whip*	FW	<u>FW</u>
	Include 3000K Lamp	L830	<u>L830</u>
	Include 3500K Lamp	L835	<u>L835</u>
	Include 4100K Lamp	L841	<u>L841</u>
	Separate Circuit*	SC	<u>SC</u>
	Master Satellite*	MS	<u>MS</u>
	Tandem Wiring*	TW	<u>TW</u>
	Lutron™ Sensor Feed* (EcoSystem ballast required)	SF	<u>SF</u>
finish	Matte Satin White	WH	<u>WH</u>

* for more information see Reference section.