

Polina™ Acoustic

PENDANT



42" Shown



Shallow Canopy detail



Mini Power Canopy detail



Black




White



Palladium Silver



Sconce companion



Indirect Pendant companion




Unlit Pendant companion



Unlit wall mount companion

DIMENSIONAL DATA

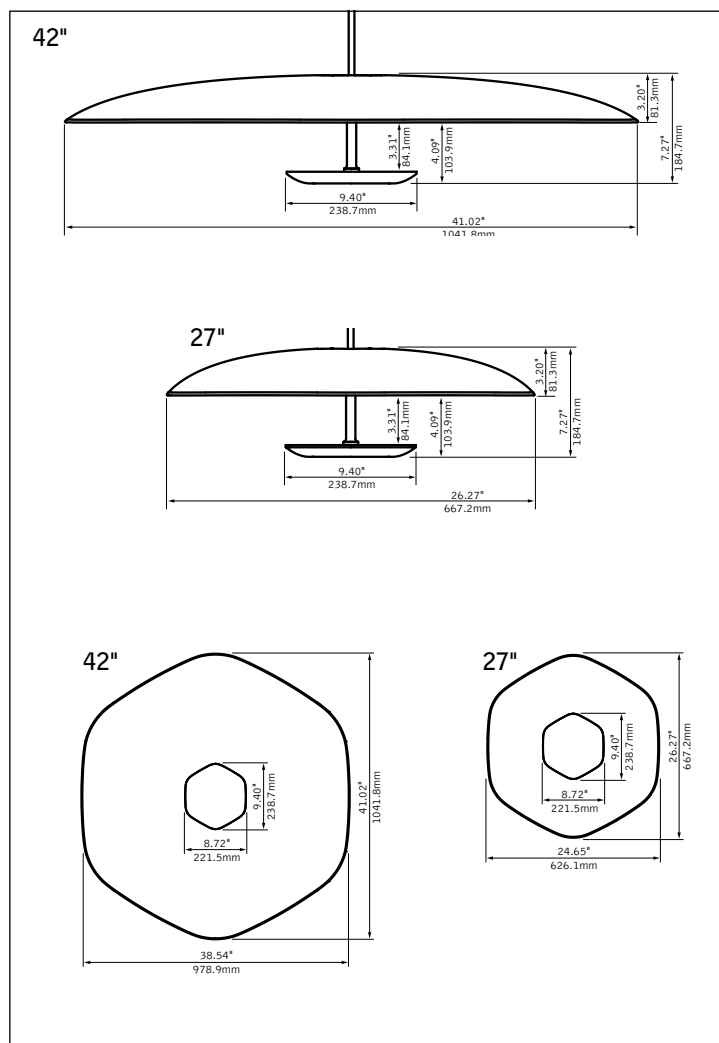

FEATURES

Decorative hexagonal acoustic pendant with shade made of TriCore™ PET felt.

Available in two sizes: nominal 27" or 42" diameter, 8" height.


The patent-pending TriCore™ acoustic construction provides superior sound absorption over a wide range of frequencies and is eco-friendly.

Proprietary light engine and white reflector provide comfortable, indirect ambient illumination.


Five lumen outputs, up to 2850 lumens.

Unlit pendant, indirect pendant, and lit or unlit wall mount companion available.

ACOUSTIC PERFORMANCE

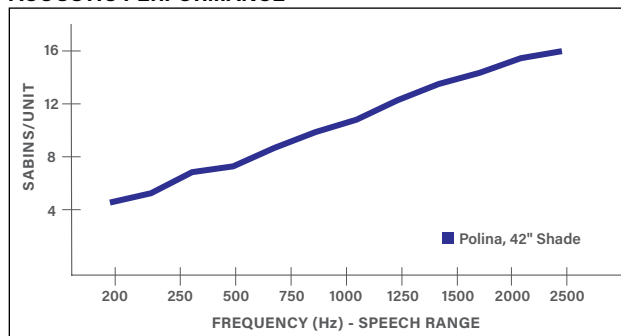

DISTRIBUTIONS

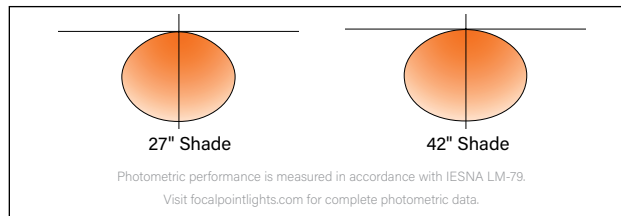

project:

Acoustic Material

Content	Shade is 100% polyester containing up to 28.7% of recycled plastic bottles (PET felt). Constructed of ASTM E-84 Class A fire rated materials and is moisture resistant.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	4mm - 20mm variable across the shade
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0, Smoke Development Index: 300
Colorfastness	AATCC 16A Option 3 Class 4 minimum at 40 hours
NRC & Sabins	Array NRC 0.70. Average Sabins per object 10.52 (ft²) *Averaged Sabins per object calculated at specific frequencies representing the human speech range (200-2500Hz)

Proprietary LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with both 80 and 90 CRI options. LED modules are replaceable from below. Color accuracy <3 SDCM.

9.4" diameter aluminum housing. Remove dust and debris with vacuum or dapping with damp lint free cloth, avoid rubbing to preserve illuminated surface quality.
Weight: Luminaire will not exceed 14lbs.

Standard 120-277V driver includes 0-10V analog dimming. Power factor > .9.

Remote power system only. One luminaire per remote box.

Emergency output —10W for 90 minutes. Maximum luminaire mounting height is 14.75ft AFF.

UL and cUL listed. Suitable for Dry Locations, indoor use only.

Polyester powder coat applied over a multi-stage pre-treatment.

Reported: L70 at >72,000 hours Calculated: L70 at 193,000 hours
Reported: L90 at >55,000 hours Calculated: L90 at 55,000 hours
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

Lumen Output	Total System Watts	Shade Size	Delivered Lumens	LPW
Luminous Low (LLP)	4.4	27"	500	114
		42"	600	136
Low (LWP)	7.9	27"	870	110
		42"	950	120
Medium (MDP)	15.4	27"	1550	101
		42"	1685	109
High (HHP)	21.2	27"	2150	101
		42"	2335	110
Max (MXP)	25.2	27"	2630	104
		42"	2850	113

To match shade illuminance when pairing 27" and 42" shades together drop the 27" shade output down one lumen level. Based on 3500K, 80CRI. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.


CRI	CCT			
	2700K	3000K	3500K	4000K
80	0.93	0.96	1.00	1.02
90	0.79	0.82	0.85	0.87

Luminaire Series		APOLP
Polina Acoustic Pendant		
Shade Profile		SHX
Soft Hexagon		SHX
Shade Size		
Nominal 27" Shade		27
Nominal 42" Shade		42
Shade Color		SLG-WH
Gray Exterior/White Interior		SLG-WH
(Consult factory for made-to-order shade color)		
Light Engine Profile		SHXT
Soft Hexagon Standard		SHXT
Shielding		DC
Dust Cover		DC
Lumen Output		
Luminous low		LLP
(Remote Power, RSC only)		
Low		LWP
Medium		MDP
High		HHP
Max		MXP
Color Temperature		
2700K, 80CRI or 90 CRI		27K or 927K
3000K, 80CRI or 90 CRI		30K or 930K
3500K, 80CRI or 90 CRI		35K or 935K
4000K, 80CRI or 90 CRI		40K or 940K
Circuit		1C
Single Circuit		1C
Voltage		UNV
120/277 UNV		UNV
System & Dimming Level		L11
0-10V - 1% Dimming		L11
Power Configuration		
Power: Mini Power Canopy		MPC
(Mounted to J-box. See page 5 for details.)		
Power: Shallow Canopies		RSC
(Multiple units per box, requires RPS-POL.)		
Canopy Color		
(Consult factory for custom colors)		
Matte Black		BK
Matte White		WH
Palladium Silver		PS
Mounting		
Stem length measured from the J-box to the bottom of the light engine		
12", Field Cuttable Stem		S12
24", Field Cuttable Stem		S24
60", Field Cuttable Stem		S60
120", Field Cuttable Stem		S_
(Specify in inches, example: 6' stem = S72)		
Suspension Color		
Matte Black		BK
Matte White		WH
Palladium Silver		PS
Light Engine Finish		
Stem finish between shade and light engine.		
(Consult factory for custom colors)		
Matte Black		BK
Matte White		WH
Palladium Silver		PS
Factory Options		
Top View Cover Plate		TC

fixture:

project:

SYSTEM DIAGRAMS

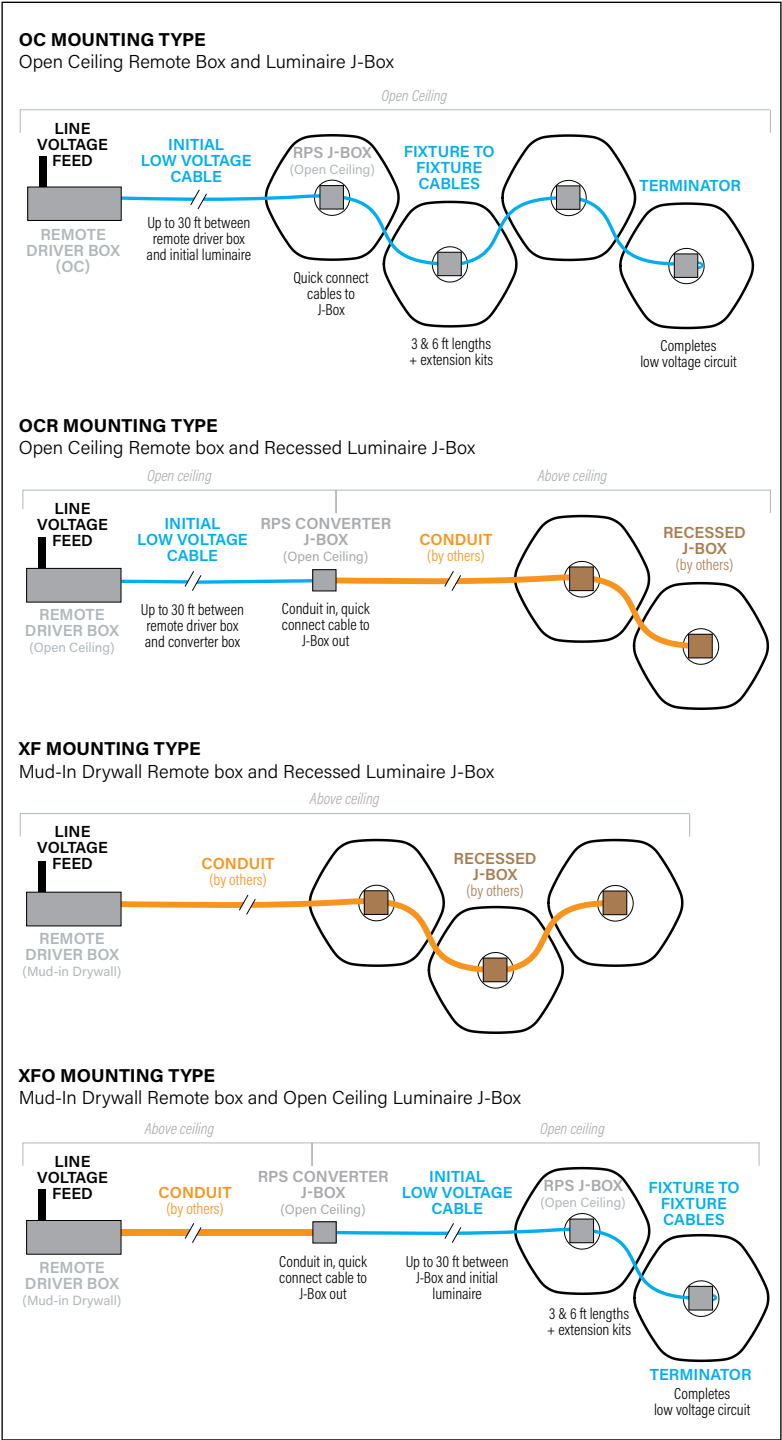

REMOTE POWER SYSTEM AVAILABILITY

Lumen Output	Luminaires per remote box	Drivers per remote box
Luminous Low (LLP)	1-19	1
	20-38	2
Low (LWP)	1-11	1
	12-22	2
Medium (MDP)	1-5	1
	6-10	2
High (HHP)	1-4	1
	5-8	2
Max (MXP)	1-3	1
	4-6	2

Fixtures will be evenly divided between drivers when possible. For an odd number of fixtures, driver 1 will power the additional fixture. For alternate fixture/driver layouts, consult factory.

Focal Point LLC reserves the right to change specifications for product improvement without notification.

REMOTE POWER SYSTEM ORDERING

Remote Power System

Polina

RPSPOL

Mounting Type

Remote Box Location

Luminaire J-box Location

Open Ceiling	Open Ceiling	OC
Open Ceiling	Recessed	OCR
Mud-In Drywall (IC rated)	Recessed	XF
Mud-In Drywall (IC rated)	Open Ceiling	XFO

For mixed mounting configurations, consult factory.

Quantity of Luminaires Powered

See offering table for availability

Qty of Luminaires

__L

Initial Cable Length*

Leave blank for XF & XFO Mounting Types. Cable from Remote Driver box to first RPS J-box..

9ft	9IC
30ft	30IC

Fixture to Fixture Cable Length*

Leave blank for OCR & XF Mounting Types.

3ft	3FC
6ft	6FC

Lumen Output

Must match specified luminaires

Luminous Low	LLP
Low	LWP
Medium	MDP
High	HHP
Max	MXP

Circuit

Single Circuit

1C

Voltage

120/277 UNV

UNV

Control System & Dimming Level

0-10V - 1% Dimming

L11

Factory Options

Chicago Plenum

CP

Remote Emergency Battery

One luminaire per Emergency Remote Box.

EMR

Remote Box Faceplate Color

Matte Black	BK
Matte White	WH
Palladium Silver	PS

Canopy Type

Shallow Canopy

SC

Canopy Color

Matte Black	BK
Matte White	WH
Palladium Silver	PS

REMOTE POWER SYSTEM CABLE EXTENSION KIT

Order additional cable lengths to extend the distance between fixtures.*
Not compatible with OCR or XF Mounting Types.

3ft

RPS-KIT3

6ft

RPS-KIT6

*Cables may not be cut to length in the field.

REMOTE POWER SYSTEM SPECIFICATIONS

Construction

Flexible and modular plug and play remote power system. Open Ceiling (OC, OCR) remote power box is rated for surface mounting in open ceiling or wall applications. Not to be installed in any recessed condition. Remote power box is easily installed in an open ceiling space or an adjacent electrical room with direct to strut and surface mounting features. Mud-In Drywall (XF, XFO) remote power box is Type IC inherently protected, suitable for direct contact with insulation. Decorative access plate is removable for ease of installation and maintenance.

Electrical

Standard 120-277V driver includes 0-10V analog dimming. Power factor > .9. 3-wire constant current architecture ensures uniform illumination to support any fixture spacing requirements. Low-voltage Class 2 cable wiring system easily daisy chains multiple fixtures and eliminates electrical conduit in open ceiling applications. CMP (Plenum rated) cable with UL94V-0 rated connectors.

Emergency Battery

Emergency output —10W for 90 minutes. One luminaire per emergency remote box. Maximum luminaire mounting height is 14.75ft AFF.

Labels

UL and cUL listed. Suitable for Dry Locations, indoor use only.

Faceplate Finish

Polyester powder coat applied over a multi-stage pre-treatment.


Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.


Warranty

Open ceiling (OC, OCR) remote power box rated for ambient temperatures up to 40°C. Recessed ceiling (XF, XFO) remote power box rated for ambient temperatures up to 25°C. 5-year limited warranty.

Remote Power System (RPS) details

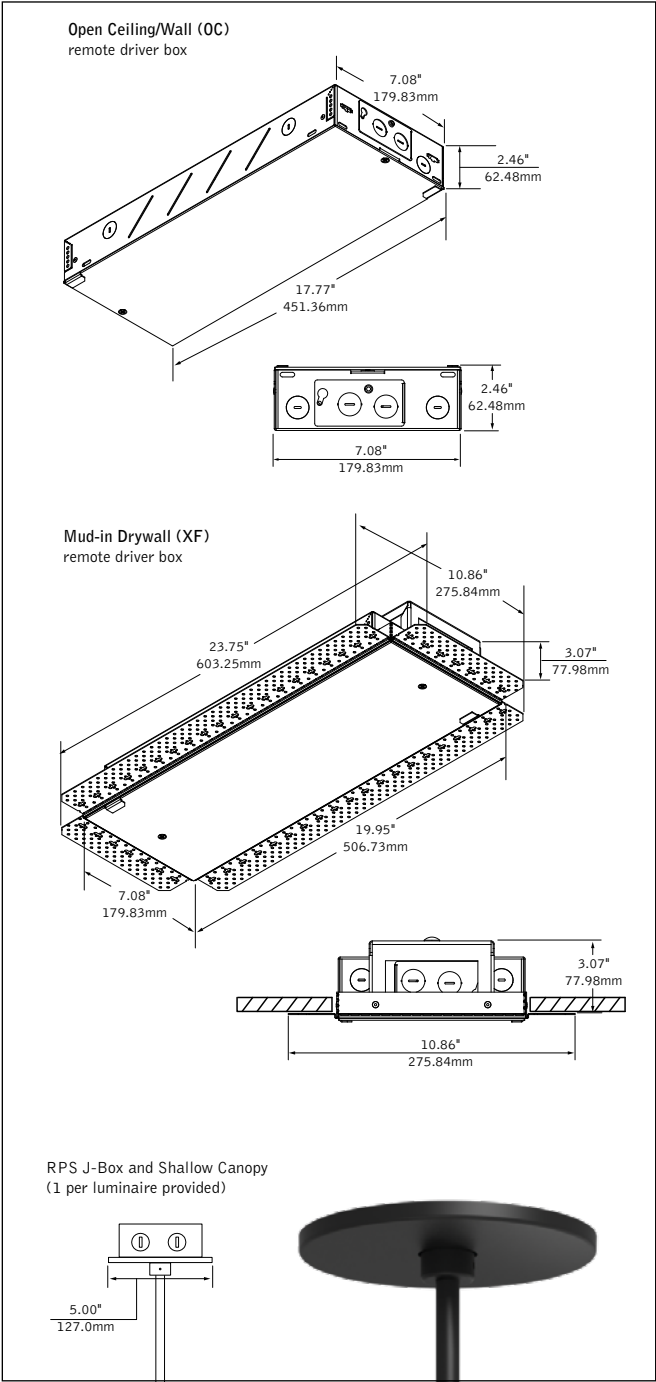

Spacing guidelines

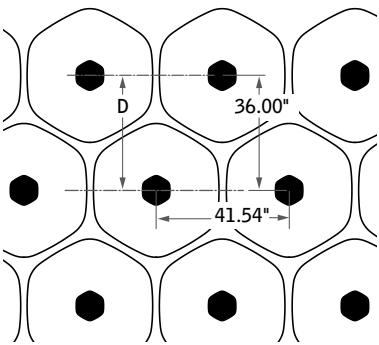

For even spacing between staggered rows of pendants as shown, the spacing along a line is dependent on the distance between the centerline of the rows, D.

The spacing along a line should be $2\sqrt{3}D/3 \sim 1.155D$

42" Shade eg: D = 36", $2\sqrt{3}(36")/3 = 41.54"$

27" Shade eg: D = 24", $2\sqrt{3}(24")/3 = 27.68"$

Remote Power System Example




SYSTEM COMPONENTS

- 1 - Remote Power System
- 3 - 42" Polina Acoustic Pendant
- 6 - 42" Polina Acoustic Unlit Pendant

Also pictured: 27" Polina Acoustic Pendants.

To match shade illuminance when pairing 27" and 42" shades together drop the 27" shade output down one lumen level.

Luminaires of different lumen outputs require dedicated remote power systems in order to supply the correct power to the luminaires.

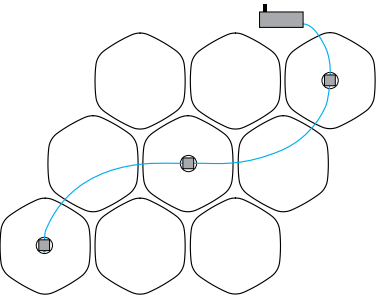

MPC - Mini Power Canopy

 Indicates Driver Location

