

Seem® 1 Acoustic Louver

ASM1CS | ASM1CBS | AUSM1S

AirCore® Technology | ID™ Technology



BEFORE YOU BEGIN

- **Configurations are run specific, please consult factory drawings before beginning installation.**
- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

Naturals

- Common pattern repetition may be observed in individual products.
- Make efforts to evaluate product patterning during installation process.
- Product can be repositioned or rotated when possible to resolve instances of pattern repetition.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS




POWER OFF




POWER ON


FOCAL POINT

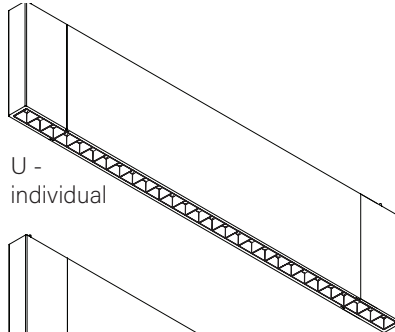


U -
individual

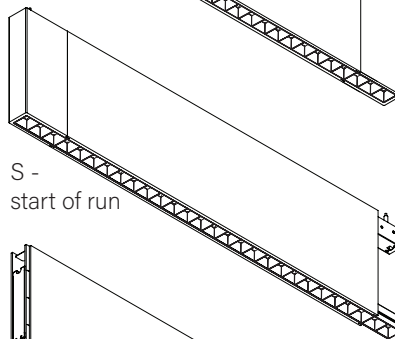


S -
start of run

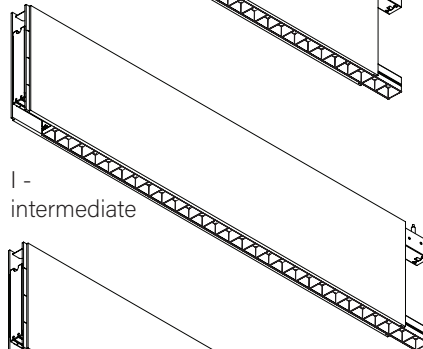

I -
intermediate

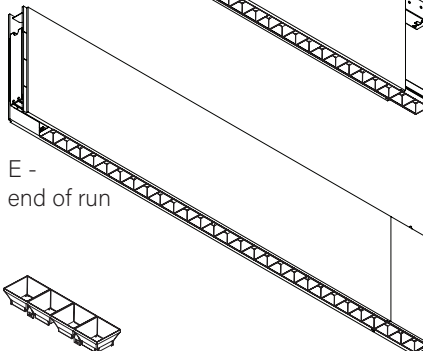

E -
end of run



Louver

COMPONENT KEY

SHIPPED INSTALLED



Access Cover Screw
(72026)

SHIPPED IN HARDWARE BAG



Joiner Screw
(700295)



**INDIVIDUAL INSTALLATIONS
FOLLOW STEPS 1, 2, 8, 12 & 13**



#1 PHILLIPS DRIVER BIT NECESSARY FOR INSTALLATION OF JOINED RUNS

FOR ALTERNATE CEILING INSTALLATIONS SEE PAGES 3-4

INDIVIDUAL UNITS CANNOT BE JOINED IN THE FIELD

UNITS CANNOT BE CUT TO LENGTH IN THE FIELD




7.5"

Minimum mounting
distance from ceiling*

*Direct/Indirect & Indirect
only illuminated baffles


PRODUCT HANDLING

1

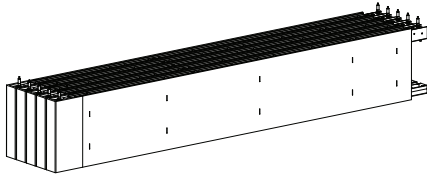


**DO NOT STAND UNLIT ACOUSTIC
BAFFLES ON THIN EDGE**

2

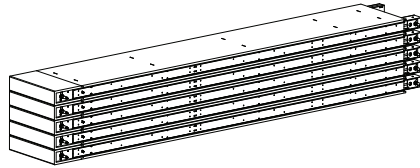


**ALWAYS FLAT STACK BAFFLES ON
CLEAN, FLAT SURFACE.
DO NOT STACK OVER 5 UNITS HIGH.**

3






**DO NOT STORE OR TRANSPORT
BAFFLES ON EDGED CARTS**

4












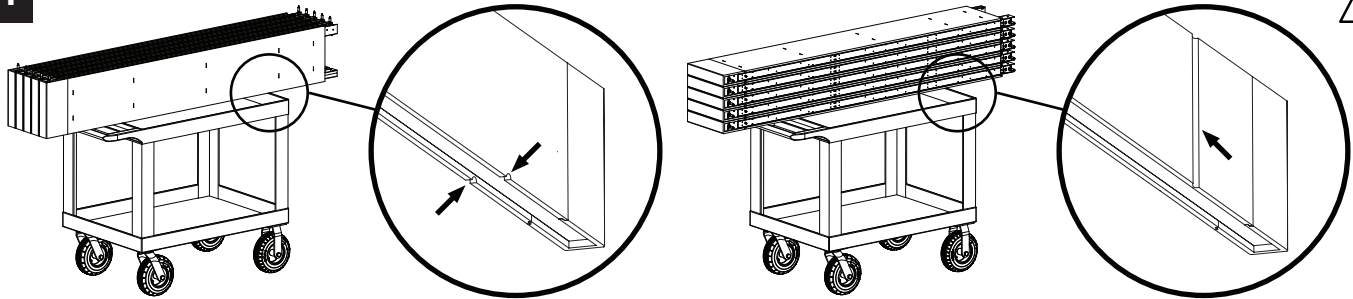







THE LIP ON EDGED CARTS CAN CAUSE INDENTATIONS IN THE PET FELT THAT CANNOT BE REPAIRED.

5



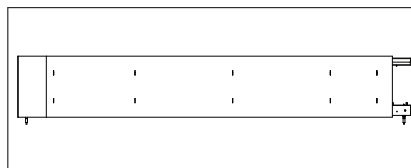
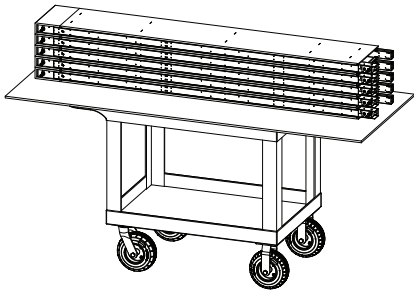


WHEN TRANSPORTING A FLAT STACK OF BAFFLES, ENSURE THE ENTIRE FOOTPRINT IS SUPPORTED

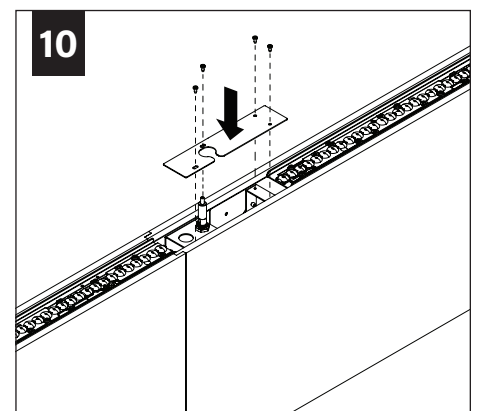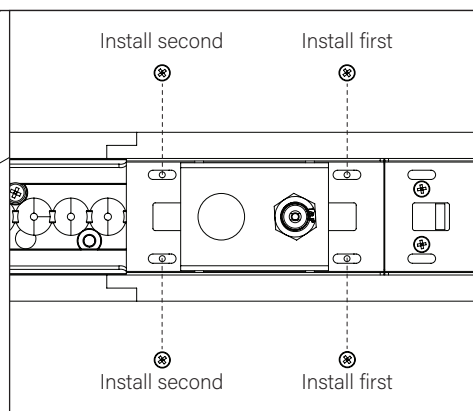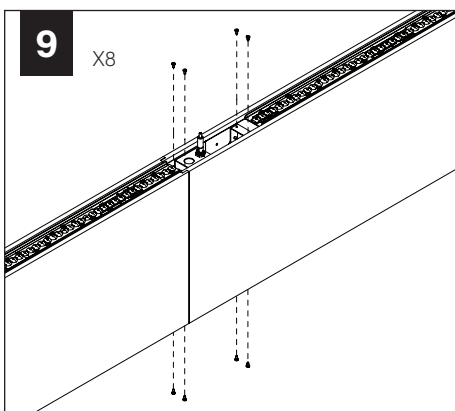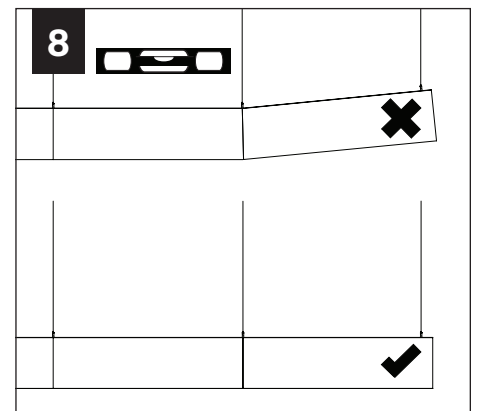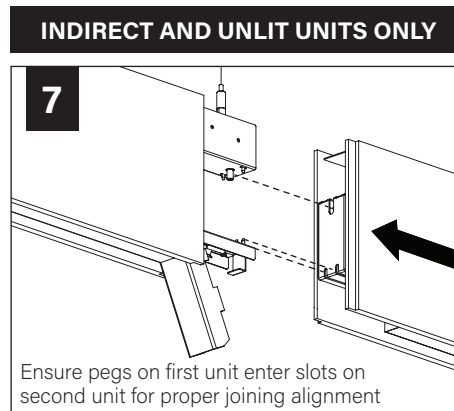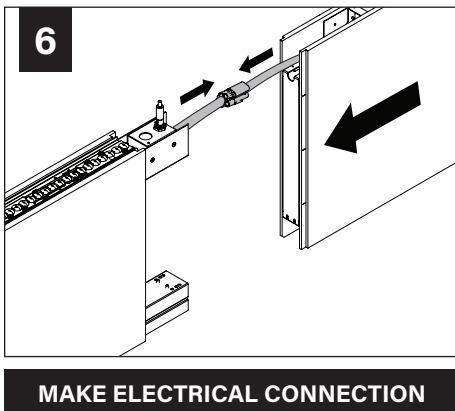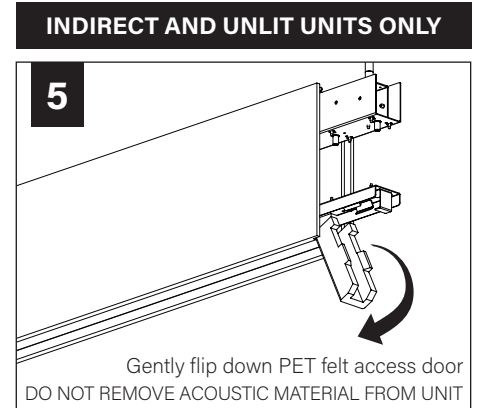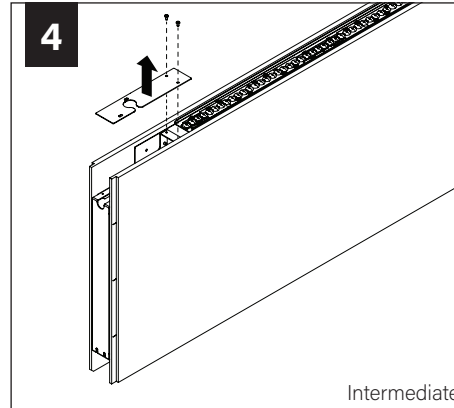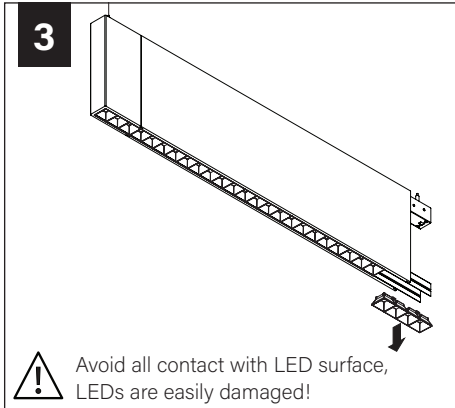
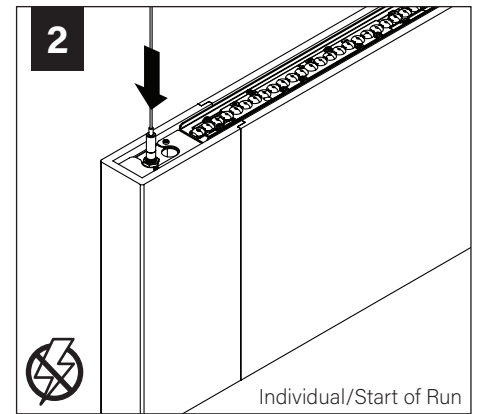
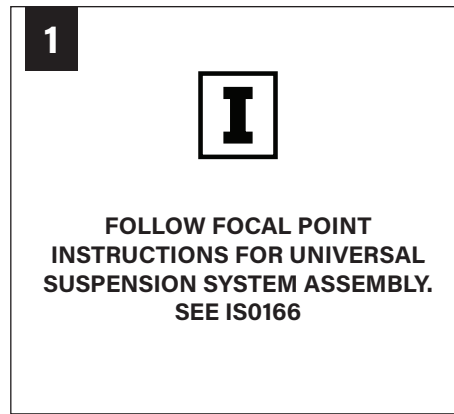
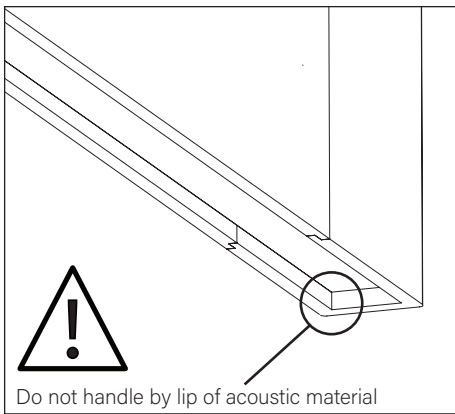


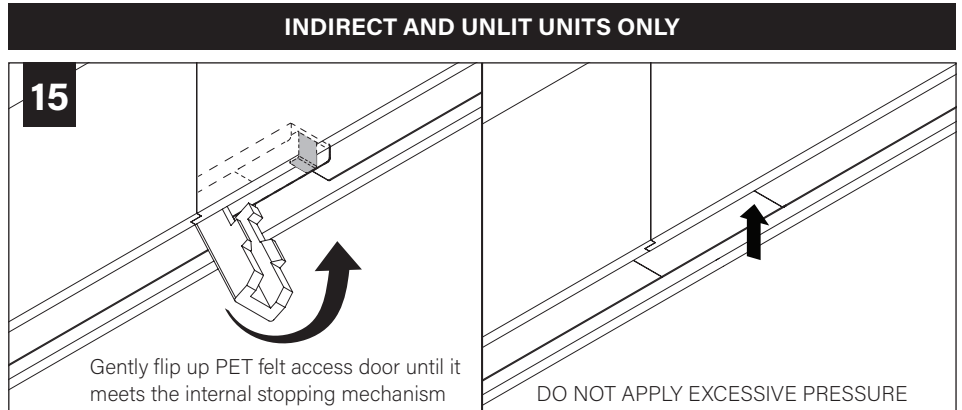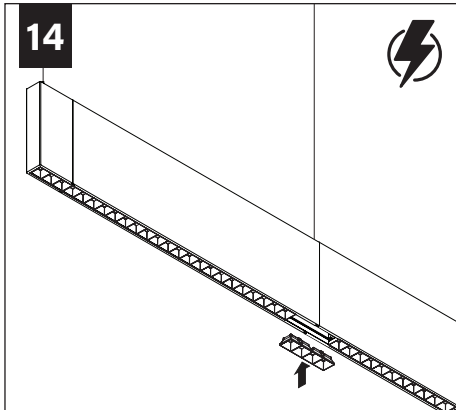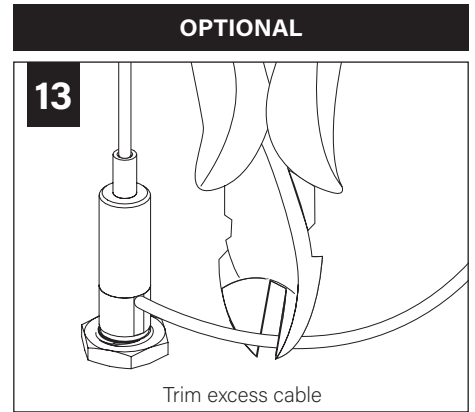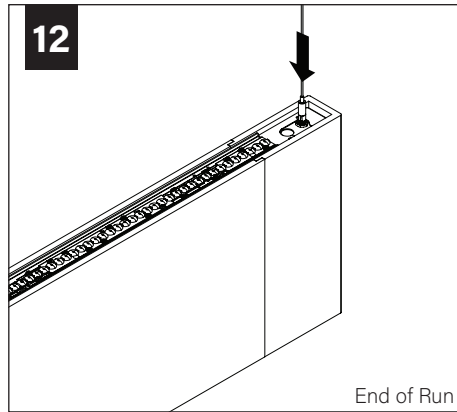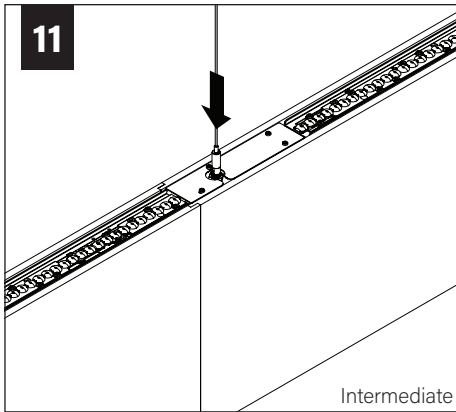




CEILING STRUT INSTALLATION

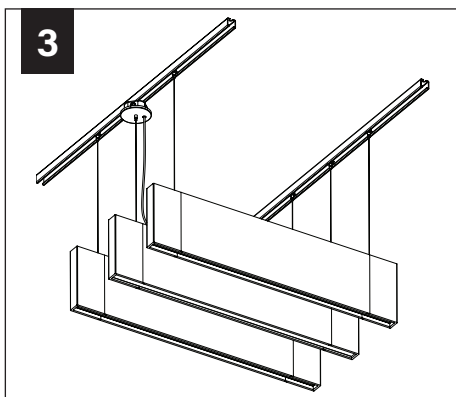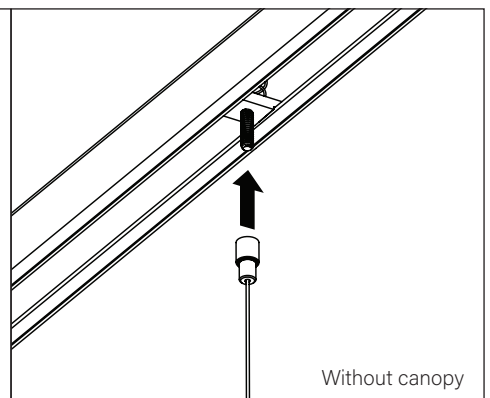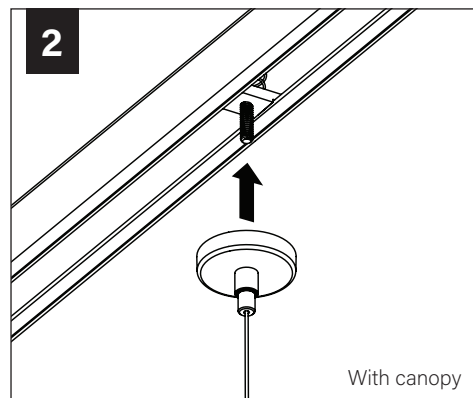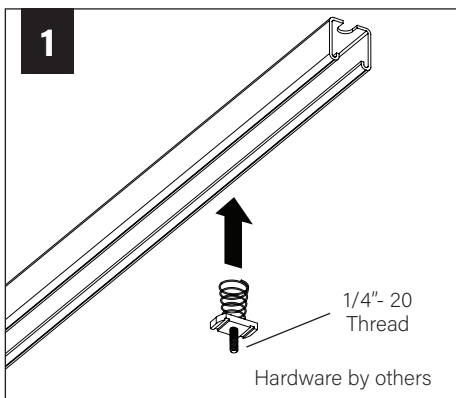


DRYWALL/HARD SURFACE CEILING INSTALLATION

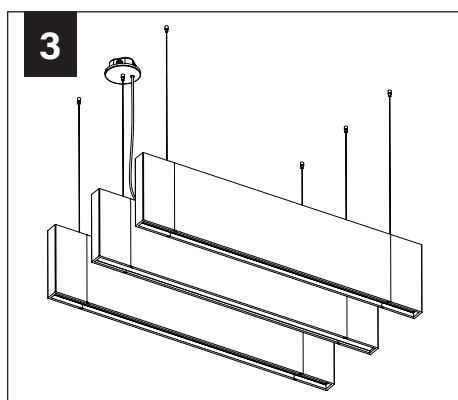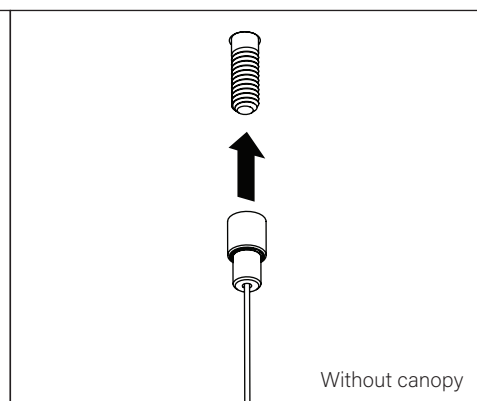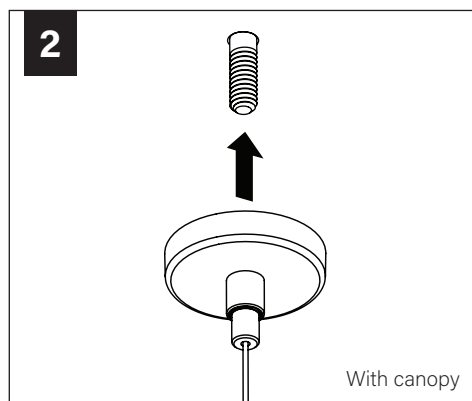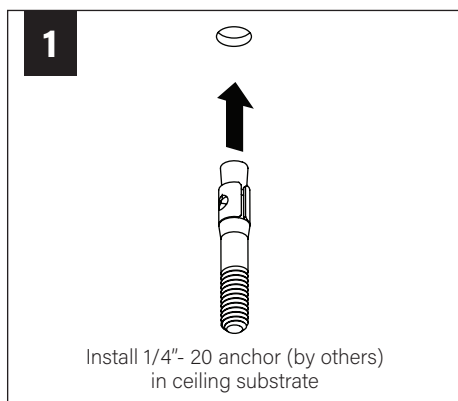



GRID CEILING INSTALLATION

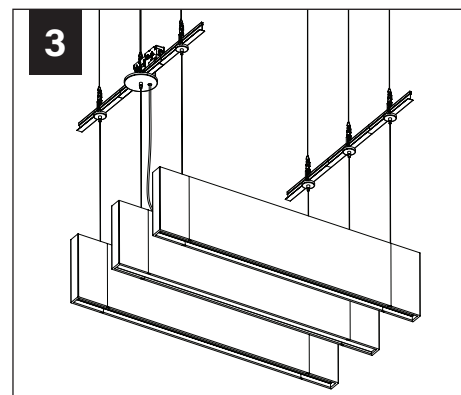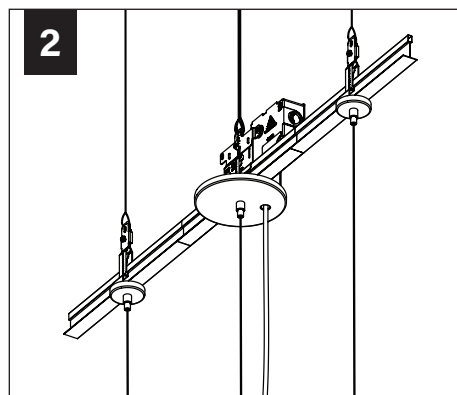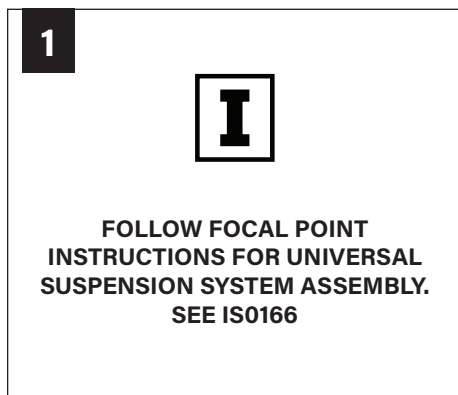

DRIVER SERVICE

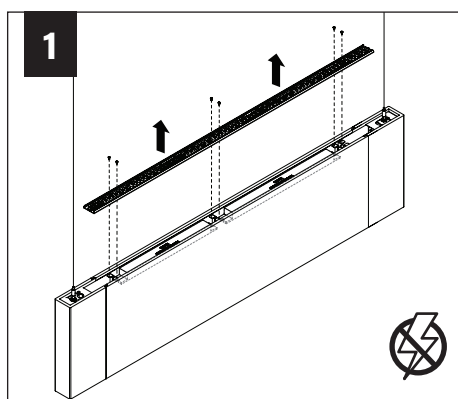

LOUVER OPTIC WITH ID+™ TECHNOLOGY INSTALLATION

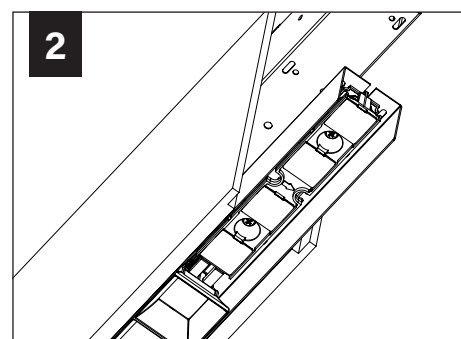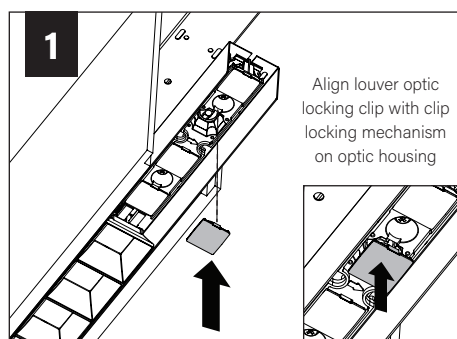

! OPTIC COMPONENTS ARE DIRECTIONALLY SENSITIVE. IF A LOUVER OPTIC BECOMES DISLODGED, IT MUST BE REINSTALLED IN THE CORRECT ORIENTATION TO OPERATE PROPERLY.