


Skydome Edge® Acoustic


UNLIT PENDANT & SURFACE MOUNT




The Naturals collection - Chestnut & White shown



surface mount




canopy detail



illuminated companion

DIMENSIONAL DATA

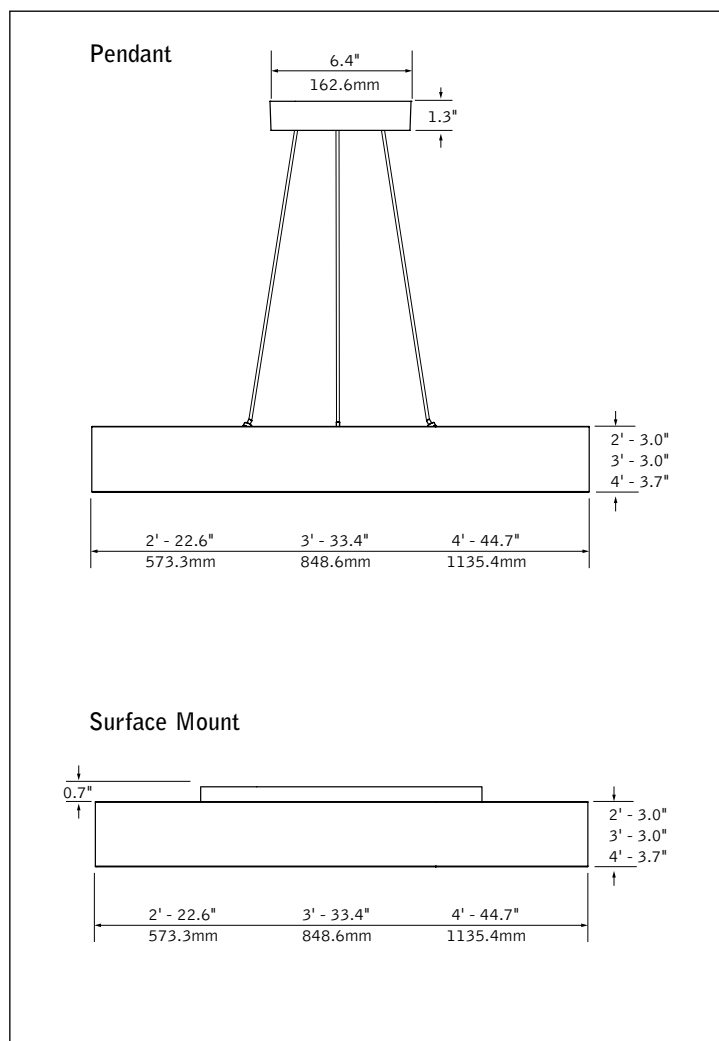

FEATURES

Sound-absorbing acoustic panel in a shallow housing.

Acoustic panel may be paired with Skydome Edge luminaires to create a coordinated look in interior spaces.


Slot canopy conceals mechanical elements.

Knife-edge design provides a modern aesthetic.

Available in nominal 2', 3' and 4' diameters.

Available with The Naturals, a series of finishes that exude biophilic beauty.

ACOUSTIC PERFORMANCE

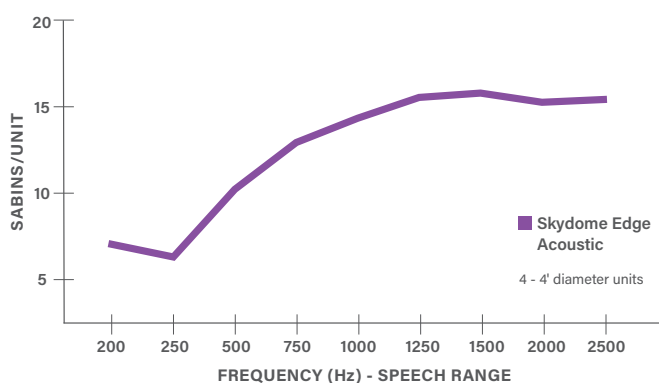

fixture:

project:

SPECIFICATIONS

Acoustic Material

Content	Housing material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant. See page 3 for color offering. Acoustic material colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions. Lead times may vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300
Colorfastness	AATCC 16A Option 3 Class 4 minimum at 40 hours

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com. Contact acoustic.solutions@focalpointlights.com for technical questions.

Sabins	Sabins is a unit of sound absorption. It measures how well one square foot of material absorbs sound. Focal Point has averaged the Sabins per unit at four specific frequency bands representing the human speech range (250, 500, 1000, 2000 Hz) to determine the Sabins per product. 4' diameter, 16" spacing = 11.52 Sabins
NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 1.05

Housing Construction

Extruded aluminum housing. Weights: 2' unit: 24lbs, 3' unit: 48lbs, 4' unit: 82lbs.

Mounting

White canopy provided. Minimum mounting heights: 2' unit: 15", 3' unit: 30", 4' unit: 45". Consult factory for alternate 3-point suspension options when shorter mounting heights are required.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.

ORDERING

Series	AUSDEP	
Skydome Edge Acoustic Unlit	AUSDEP	
Nominal Size		
2' Diameter	2	
3' Diameter	3	
4' Diameter	4	
Mounting		
24" Aircraft Cable (2' diameter only)	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable (Consult factory for alternate lengths or 3-point suspension options)	C96	
Surface Mount	SM	
Acoustic Panel Color See page 3 for color offerings		
Housing Finish (Consult factory for The Naturals finishes)		
Matte Satin White	WH	
Titanium Silver	TS	
Matte Black	BK	
Custom Color (Specify your RAL color value. Extended lead time consult factory.)	RAL_ _ _ _	

Acoustic Materials



THE NATURALS (25% SCALE)



STANDARD PET



PREMIUM PET

