


TruTile® Shapes

ACOUSTIC WALL TILE



Scallop vertical rainbow fish pattern

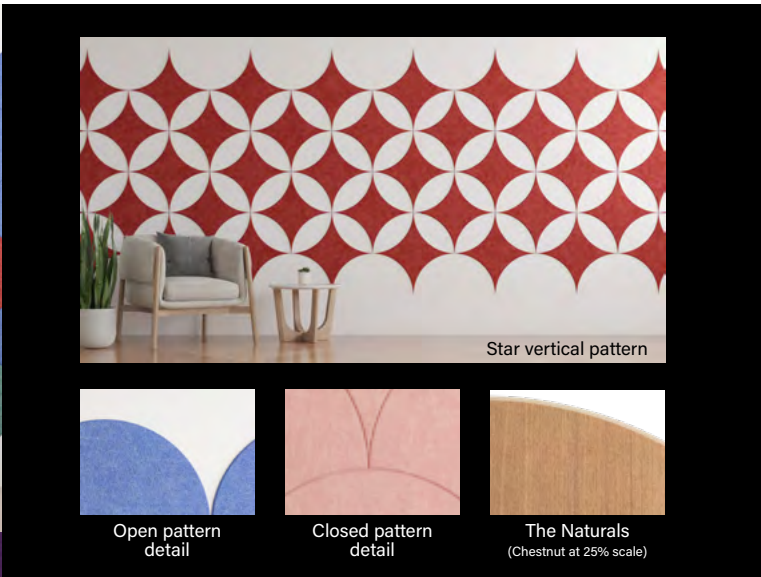

Star vertical pattern



Open pattern detail



Closed pattern detail



The Naturals
(Chestnut at 25% scale)

SHAPES (8% scale)



FEATURES

9mm thick, sound absorbing wall tiles available in 3 unique shapes that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.

Available with The Naturals, a series of finishes that exude biophilic beauty.

Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Designs and TruTile Textures for more coordinated wall tile options.


DIMENSIONAL DATA

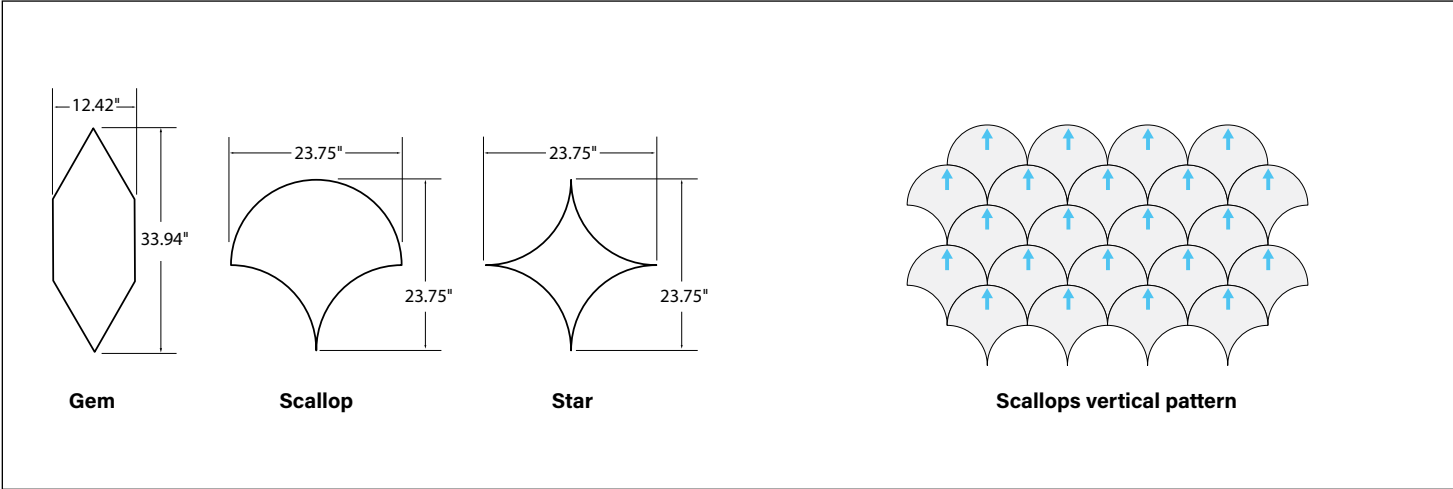


fixture:

project:


PATTERN INSPIRATIONS

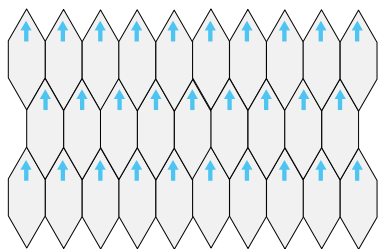


Gem vertical stack pattern

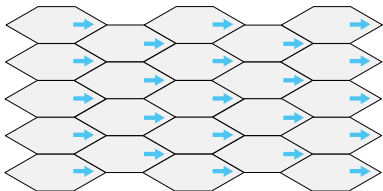


Gem horizontal stack pattern




Gem braid pattern



Scallop lantern pattern

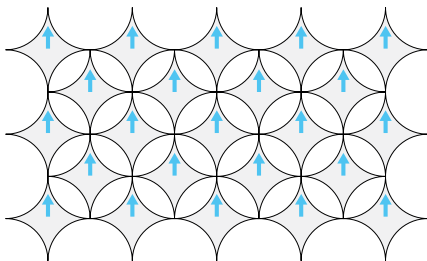

Star vertical pattern

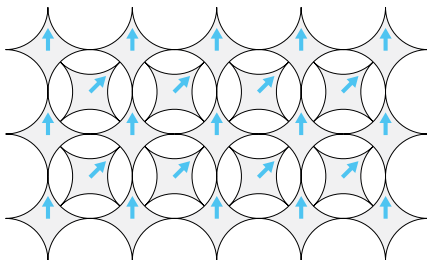

Star vertical/45° turn pattern

ORDERING

Series	AUTT	
TruTile	AUTT	
Size		22
2' x 2' panel	22	
Shape		
Gem	GEM	
Scallop	SCP	
Star	STR	
Design		SD
Solid	SD	
Mounting		SM
Surface Mount by others	SM	
(Construction glue direct to surface recommended)		
Acoustic Tile Color		
See page 3 for color offering		



Options in orange qualify for the Quickship program. Five color options. 10-day up to 200 pieces. Refer to Quickship Guide for complete details.

SPECIFICATIONS

Acoustic Material

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant. See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions . Lead times vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300
Colorfastness	AATCC 16A Option 3 Class 4 minimum at 40 hours

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com. Contact acoustic.solutions@focalpointlights.com for technical questions.

NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 0.30
-----	--

Weight

1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5".

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.

Acoustic Materials



THE NATURALS (25% SCALE)



LIGHT OAK



LOK GRAY ELM



GRE CHESTNUT




CHT WALNUT WLT


STANDARD PET




PURE BLACK




PBK CHARCOAL GRAY CHG



SLATE




SLT SHADOW GRAY SDG




SILVER GRAY




SLG PEARL ICE PIC



CLASSIC WHITE




CWH NATURAL LINEN NTL




HAZELWOOD

HZW


PREMIUM PET



CORNFLOWER BLUE CFB




DENIM BLUE DNB




MIDNIGHT BLUE MNB




DEEP PURPLE DPP



BRICK RED BRD




CHERRY RED CHR



BERRY BRY




BLUSH BLS




DEEP WATER DWT



SEAFOAM SFM



EMERALD GREEN EMG



LIMESTONE LMS



CARROT CRT



PINEAPPLE PNA

