
TruTile® Designs





DESIGNS (8% scale)

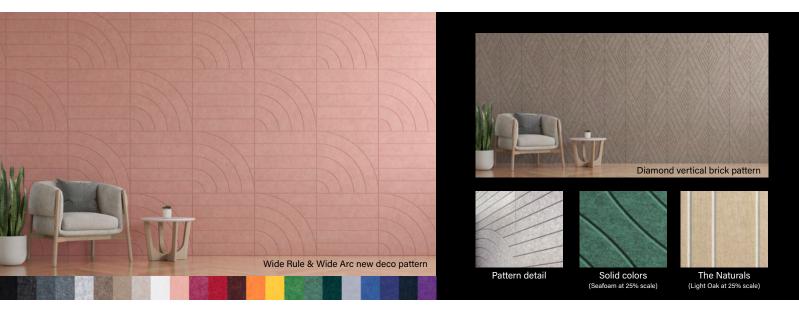

FEATURES

9mm thick, 2' \times 2' square sound absorbing wall tiles available in 7 designs or solid panels that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.

Available with The Naturals, a series of finishes that exude biophilic beauty.


Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Textures and TruTile Shapes for more coordinated wall tile options.

DIMENSIONAL DATA

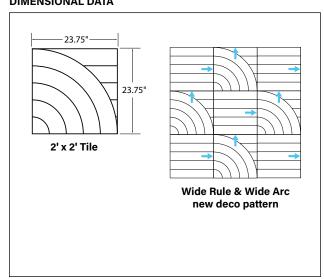



PATTERN INSPIRATIONS

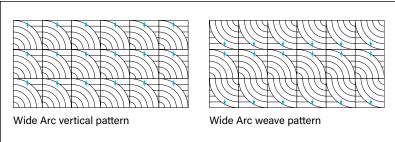




Wide Slant pinwheel pattern






Double Arc organic pattern

Double Arc infinity pattern






Double Arc circles pattern


Double Arc vertical pattern






Multitrack madras pattern


Multitrack vertical pattern






Diamond vertical brick pattern

Diamond weave pattern





Willow alternating vertical pattern

Willow alternating horizontal pattern

ORDERING		
Series		AUTT
TruTile	AUTT	
Size		22
2' x 2' panel	22	
Shape		SQ
Square	SQ	
Design		
Wide Rule	WRL	
Wide Arc	WAC	
Wide Slant	WST	
Double Arc	DAC	
Multitrack	MTK	
Diamond	DMD	
Willow	WLO	
Solid	SD	
Mounting		SM
Surface Mount by others	SM	
(Construction glue direct to surface recommended)		
Acoustic Tile Color See page 3 for color offering		



SPECIFICATIONS

Acoustic Material

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant.	
	See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions. Lead times vary depending on color.	
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum	
PET Thickness	9mm	
Surface Burning Characteristcs	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300	
Colorfastness	AATCC 16A Option 3 Class 4 minimum at 40 hours	

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com.

Contact acoustic.solutions@focalpointlights.com for technical questions.

Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 0.30

Weight

1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5".

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.

Acoustic Materials



THE NATURALS (25% SCALE)










MNB DEEP PURPLE

DPP

STANDARD PET

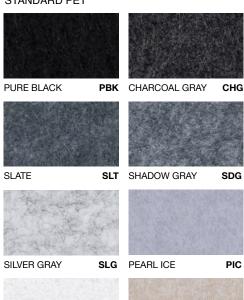



NTL



Slight color variations are inherent to the PET felt manufacturing process. Color renditions on screens vary due to display settings and lighting conditions.

Order samples at focalpointlights.com/Samples



