


TruTile® Shapes

ACOUSTIC WALL TILE



Scallop vertical rainbow fish pattern

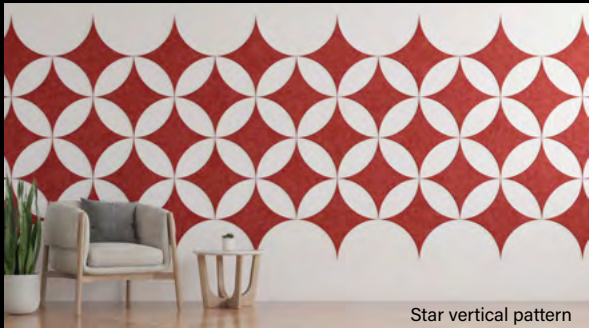

Star vertical pattern



Open pattern detail



Closed pattern detail



The Naturals
(Chestnut at 25% scale)

SHAPES (8% scale)



Gem
(Shadow Gray)

Scallop
(The Naturals - Light Oak)

Star
(Cherry Red)

FEATURES

9mm thick, sound absorbing wall tiles available in 3 unique shapes that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.

Available with The Naturals, a series of finishes that exude biophilic beauty.

Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Designs and TruTile Textures for more coordinated wall tile options.

DIMENSIONAL DATA

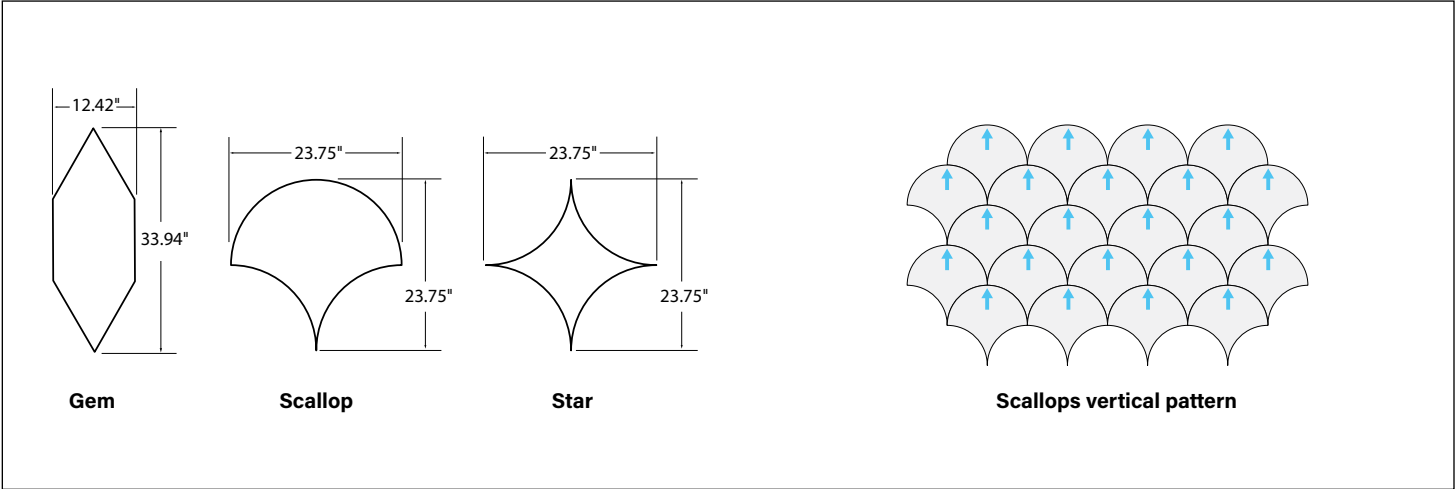

Gem

Scallop


Star

Scallops vertical pattern


fixture:

project:


PATTERN INSPIRATIONS

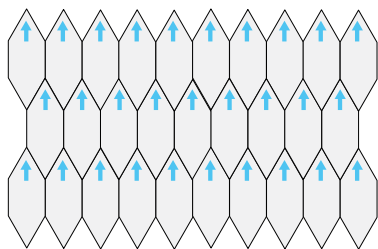


Gem vertical stack pattern

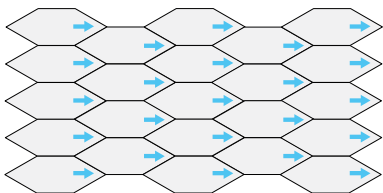


Gem horizontal stack pattern




Gem braid pattern

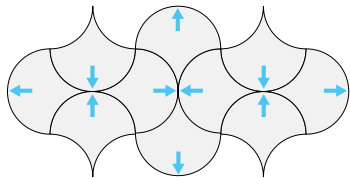

Scallop lantern pattern

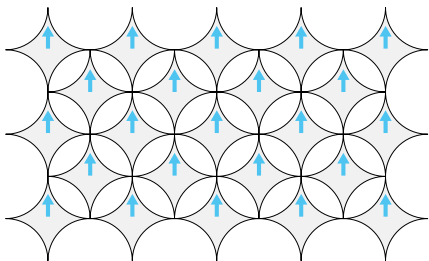

Star vertical pattern

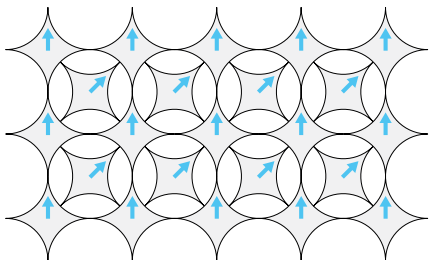

Star vertical/45° turn pattern

ORDERING

Series	AUTT	
TruTile	AUTT	
Size		22
2' x 2' panel	22	
Shape		
Gem	GEM	
Scallop	SCP	
Star	STR	
Design		SD
Solid	SD	
Mounting		SM
Surface Mount by others	SM	
(Construction glue direct to surface recommended)		
Acoustic Tile Color		
See page 3 for color offering		



Options in orange qualify for the Quickship program. Five color options. 10-day up to 200 pieces. Refer to Quickship Guide for complete details.

SPECIFICATIONS

Acoustic Material

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant. See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions . Lead times vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300
Colorfastness	AATCC 16A Option 3 Class 4 minimum at 40 hours

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com. Contact acoustic.solutions@focalpointlights.com for technical questions.

NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 0.30
-----	--

Weight

1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5"

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.

Acoustic Materials



THE NATURALS (25% SCALE)



LIGHT OAK



LOK GRAY ELM



CHESTNUT



WALNUT WLT

STANDARD PET




PURE BLACK

PBK




CHARCOAL GRAY

CHG




SLATE

SLT




SHADOW GRAY

SDG



SILVER GRAY

SLG



PEARL ICE

PIC



CLASSIC WHITE

CWH



NATURAL LINEN

NTL



HAZELWOOD

HZW

PREMIUM PET



CORNFLOWER BLUE

CFB



DENIM BLUE

DNB




MIDNIGHT BLUE

MNB



DEEP PURPLE

DPP




BRICK RED

BRD



CHERRY RED

CHR



BERRY

BRY



BLUSH

BLS



CARROT

CRT



PINEAPPLE

PNA




DEEP WATER

DWT




SEAFOAM

SFM



EMERALD GREEN

EMG



LIMESTONE

LMS

Slight color variations are inherent to the PET felt manufacturing process. Color renditions on screens vary due to display settings and lighting conditions.

Order samples at focalpointlights.com/Samples

