




avenue® led

b
/
6



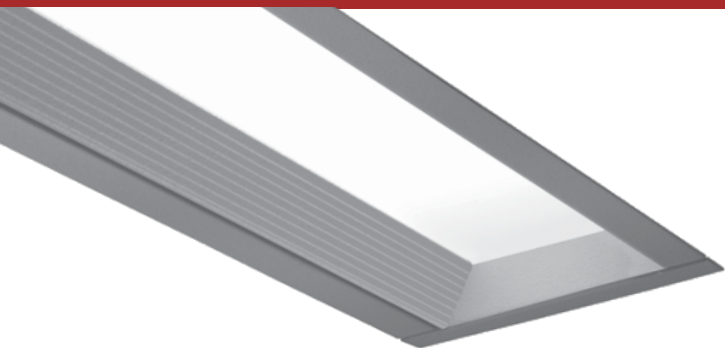


corrugated regress trim



solid regress trim




flush lens



Shielding	LED System	Delivered Lumens	Tested System Watts	LPW
SR	Standard output (LL1)	1759	25	70
	Medium output (LL2)	2164	31	70
	High output (LL3)	2769	42	66
FL	Standard output (LL1)	2048	25	82
	Medium output (LL2)	2461	31	79
	High output (LL3)	3268	42	78

*Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

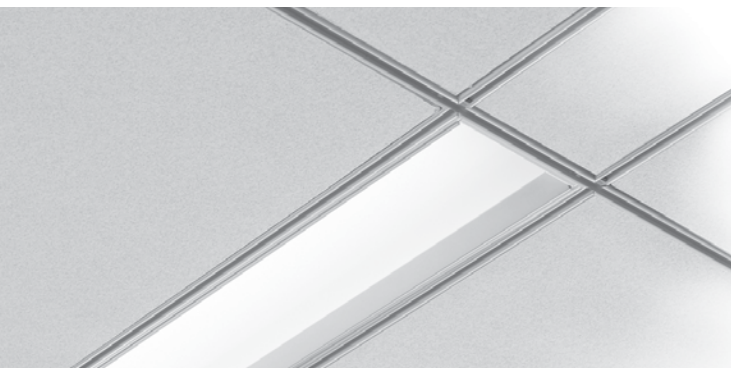


corrugated regress trim



solid regress trim



flush lens




Shielding	LED System	Delivered Lumens	Tested System Watts	LPW
SR	Standard output (LL1)	2118	25	85
	Medium output (LL2)	2439	31	79
	High output (LL3)	3238	42	77
FL	Standard output (LL1)	1929	25	77
	Medium output (LL2)	2296	31	74
	High output (LL3)	2911	42	69

*Based on 3500K. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%


avenue® b led

Sleek and simple, thin lines of light integrate with architecture for maximum impact and design flexibility. Avenue B LED centers easily in grid without extra tees.

grid mount (regress trim shown)

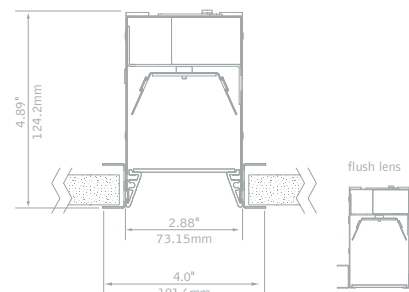


drywall flange (regress trim shown)

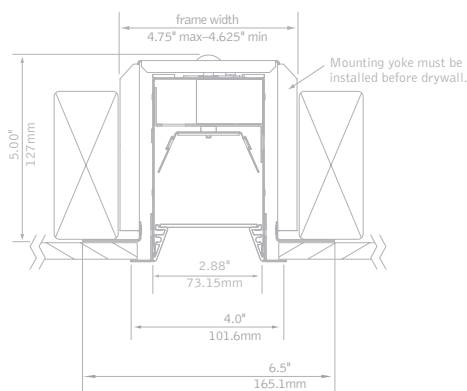


avenue® 6 led

An integrated lighting solution that compliments the ceiling and entire space while providing comfortable general illumination.

grid mount (regress trim shown)

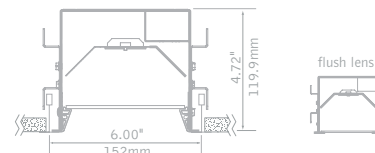

drywall flange

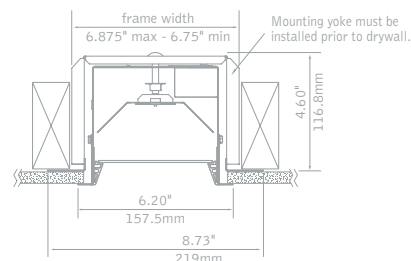



LED System Features

- LED board & driver combination optimized for high performance
- 3000K, 3500K and 4000K
- L70 at 50,000 hours
- 0-10V dimming standard
- Step dimming also available
- 5 year warranty



Ceiling Integration


- Modular lay-in design allows simple installation in virtually any grid ceiling type.
- Luminaire always rests at level of tile
- Drywall flange available



lay-in tile





regular tile

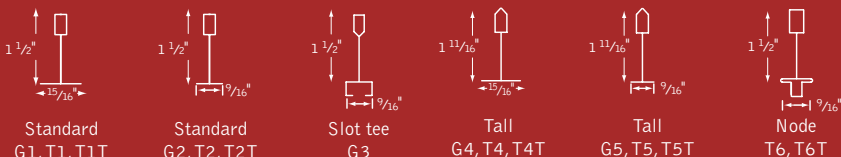


TechZone™

Focal Point's TechZone compatible luminaires are specifically designed to integrate with TechZone ceilings.

Avenue B LED is designed for 4" Armstrong TechZone.

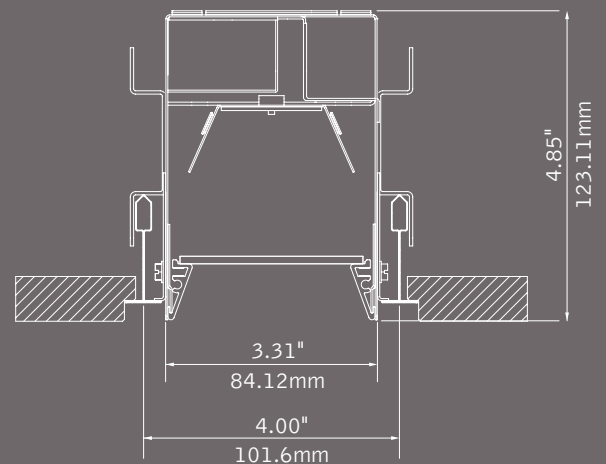


9/16" Suprafine®
T5



9/16" Interlude®
T6

Avenue 6 LED is designed for 6" Armstrong TechZone.

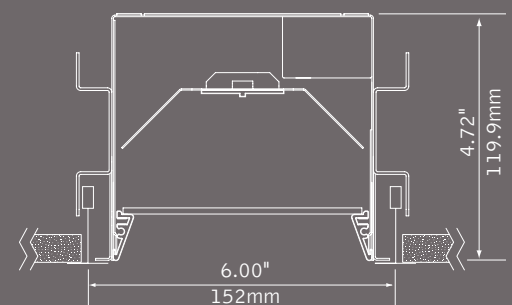

avenue b led

luminaire series	
Avenue B LED	FAVBL
Avenue B LED for Armstrong® TechZone®	FAVBTLZL
shielding	
Corrugated Regressed Trim Frst.Lns	CR
Solid Regressed Trim Frosted Lens	SR
Flush Frosted Lens	FL
led system	
Standard Output	LL1
Medium Output	LL2
High Output	LL3
color temperature	
3000K	30K
3500K	35K
4000K	40K
circuits	
Single Circuit	1C
voltage	
120 Volt	120
277 Volt	277
driver	
0-10V - 10% Dimming	LD1
Lutron A-Series	L3D
1% EcoSystem Digital (Consult factory for 3-wire control)	
Step Dimming	SD5
ceiling configurations	
Drywall Flange	F
Std. 15/16" Lay-in	G1
Std. 15/16" Tegular	T1
Std. 15/16" Tegular, against Tee	T1T
Std. 9/16" Lay-in	G2
Std. 9/16" Tegular	T2
Std. 9/16" Tegular, against Tee	T2T
9/16" Slot-tee Tegular	G3
Tall 15/16" Lay-in	G4
Tall 15/16" Tegular	T4
Tall 15/16" Tegular, against Tee	T4T
Tall 9/16" Lay-in	G5
Tall 9/16" Tegular (TechZone compatible)	T5
Tall 9/16" Tegular, against Tee	T5T
Node 9/16" Tegular (TechZone compatible)	T6
Node 9/16" Tegular, against Tee	T6T
factory Options	
Chicago Plenum	CP
Emergency Battery (Not available in 2' housing)	EM
Positional Clips	EQ
6' New York City Flex Whip	FNY
6' Flex Whip (Sensor options available—consult factory)	FW
finish	
Matte White Housing	WH
luminaire length	
2' Nominal Housing	2'
4' Nominal Housing	4'
6' Nominal Housing	6'
8' Nominal Housing	8'



avenue 6 led

luminaire series	
Avenue 6 LED	FAV6L
shielding	
Corrugated Regressed Trim Frst.Lns	CR
Solid Regressed Trim Frosted Lens	SR
Flush Frosted Lens	FL
led system	
Standard Output	LL1
Medium Output	LL2
High Output	LL3
color temperature	
3000K	30K
3500K	35K
4000K	40K
circuits	
Single Circuit	1C
voltage	
120 Volt	120
277 Volt	277
driver	
0-10V - 10% Dimming	LD1
Lutron A-Series	L3D
1% EcoSystem Digital (Consult factory for 3-wire control)	
Step Dimming	SD5
ceiling configurations	
Drywall Flange	F
Std. 15/16" Lay-in	G1
Std. 15/16" Tegular	T1
Std. 9/16" Lay-in	G2
Std. 9/16" Tegular	T2
9/16" Slot-tee Tegular (TechZone compatible)	G3
Tall 15/16" Lay-in (TechZone compatible)	G4
Tall 15/16" Tegular (TechZone compatible)	T4
Tall 9/16" Lay-in	G5
Tall 9/16" Tegular (TechZone compatible)	T5
Node 9/16" Tegular (TechZone compatible)	T6
factory options	
Chicago Plenum	CP
Emergency Battery	EM
6' New York City Flex Whip	FNY
6' Flex Whip (Sensor options available—consult factory)	FW
finish	
Matte White Housing	WH
luminaire length	
4' Nominal Housing	4'
6' Nominal Housing	6'
8' Nominal Housing	8'

