



Amica® 2 1x4

LED

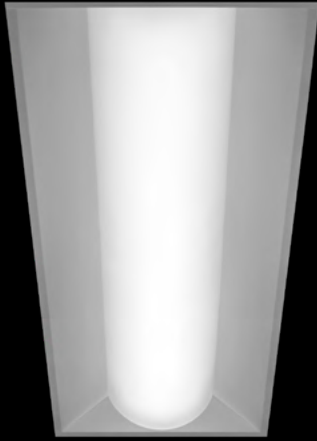


lens detail




air return


DIMENSIONAL DATA

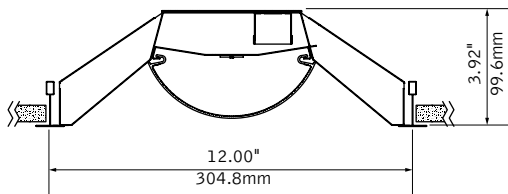

led options

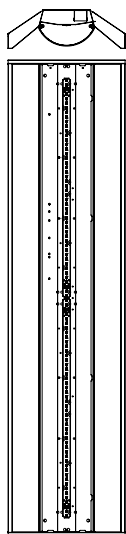

Standard
(1 LED Board)

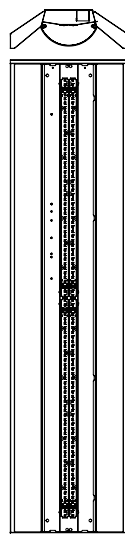

High Efficiency
(2 LED Boards)

FEATURES

Architectural recessed LED luminaire with classic lines to complement architecture.

Center ribbed diffuser masks LED brightness to create even illumination.


3.9" housing depth ideal for shallow plenum applications.

Access from below the ceiling for easy maintenance.

Connected Solutions: Integrates with wired and wireless building control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

PERFORMANCE



PRODUCT OVERVIEW

Lumen Output:	4000-8000lm
Wattage:	30-63
LPW:	124-134
SDCM:	3

High Performance
4000 Lumens (4000LH)

Delivered Lumens: 4000lm

Total System Watts: 30W

Photometric performance is measured in accordance with IESNA LM-79. Visit focalpointlights.com for complete photometric data.

fixture:

project:

MOUNTING INFORMATION

grid



9/16" tee




15/16" tee




slot tee

drywall frame kit

specify "F" Drywall Frame Kit for drywall ceiling conditions.



Use tie-wire or screws to secure frame kit.



Cut out dimensions:
1': Min: 12.25"
Max: 12.56"
4': Min: 48.25"
Max: 48.56"

SPECIFICATIONS

LED System

LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with CRI>80, 3 SDCM. LED modules and drivers are replaceable from below.

Construction

One piece 24 Ga. steel reflector and housing. Bottom access 24 Ga. steel driver compartment. Top access plate for electrical connection. Positional brackets supplied as standard. Unit weight: 11.7 lbs.

Optic

24 Ga. steel reflectors finished in matte satin white powder coat. .084" thick frosted white acrylic diffuser with linear micro-prism pattern.

Electrical

Standard 120-277V driver includes 0-10V analog dimming. Power factor > .9. LD1 not Right Light as standard, consult factory. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Emergency

Emergency battery output—10 watts for 90 minutes. Maximum mounting height: 19.9ft Emergency Circuit with Connected Solutions (WSPC, NLT1, NXE1, WLXP) requires a UL924 compliant device, consult factory.

Labels

UL and cUL Listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Optional Anti-Microbial paint finish available.

Lumen Maintenance

Reported:	L70 at > 60,000 hours	Calculated:	L70 at 150,000 hours
	L80 at > 60,000 hours		L80 at 94,000 hours
(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)			

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5 year limited warranty.

PERFORMANCE CHART

Delivered Lumens		Tested System Watts	LPW	Lumen Multipliers		
				CCT	CRI	Multiplier
4000 Lumens	4000L	32	124	3000K	80	0.81
	4000LH	30	134		90	0.93
4500 Lumens	4500L	37	122	3500K	80	1.00
	4500LH	34	133		90	0.96
5000 Lumens	5000L	38	130	4000K	80	0.85
	5000LH	38	134		90	0.98
5500 Lumens	5500L	42	129			
	5500LH	41	133			
6000 Lumens	6000L	46	128			
	6000LH	44	133			
6500 Lumens	6500L	51	127			
	6500LH	49	133			
7000 Lumens	7000L	57	123			
	7000LH	55	128			
7500 Lumens	7500L	60	125			
	7500LH	58	129			
8000 Lumens	8000L	63	128			
	8000LH					

Based on 3000K, 80 CRI. *Lumen output may vary +/- 8%. Actual wattage may vary +/- 5%

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING

Luminaire Series	FAM2
Amica 2	FAM2
Nominal Size	14
1' x 4'	14
Shielding	ACR
Ribbed Acrylic Diffuser	ACR
Lumen Output	
Standard (2 LED Boards)	
4000 Lumens	4000L
4500 Lumens	4500L
5000 Lumens	5000L
5500 Lumens	5500L
6000 Lumens	6000L
6500 Lumens	6500L
7000 Lumens	7000L
7500 Lumens	7500L
High Efficiency (4 LED Boards)	
4000 Lumens	4000LH
4500 Lumens	4500LH
5000 Lumens	5000LH
5500 Lumens	5500LH
6000 Lumens	6000LH
6500 Lumens	6500LH
7000 Lumens	7000LH
7500 Lumens	7500LH
8000 Lumens	8000LH
Color Temperature	
3000K, 80+ CRI or 90+ CRI	30K or 930K
3500K, 80+ CRI or 90+ CRI	35K or 935K
4000K, 80+ CRI or 90+ CRI	40K or 940K
Circuit	1C
Single Circuit	1C
Voltage	
120/277 UNV Volt	UNV
347 Volt	347
(LD1, WSPC only. Not available with EM.)	
Low Voltage	LV
Control System & Dimming Level	
0-10V - 10% Dimming	LD1
(Not Right Light as standard, consult factory)	
0-10V - 1% Dimming	L11
Low Voltage, PoE compatible	LVN
(No driver. Not available with EM. LV Voltage only.)	
Lutron Hi-Lume EcoSystem (LDE1) -	LH1
1% Dimming (Not available with 7500L or 8000LH.)	
DALI - 1% Dimming	D11
Step Dimming	SD5
Wattstopper PLUS:	WSPC
Connected Light Module	
(0-10V standard. Consult factory for DALI)	
Acuity nLight® - 1% Dimming	NLT1
(Not available with CP)	
Current NX Enabled - 1% Dimming	NXE1
WaveLinx Pro - 1% Dimming	WLXP
Mounting	
Grid	G
Drywall Frame Kit	F
(Not available with WSPC, NXE1 or NLT1)	
(Cut out dimensions: Min: 12.25"/Max: 12.56"	
Min: 48.25"/Max: 48.56")	
Surface Mount	SM
(Not available with WSPC, NXE1 or NLT1)	
24" Aircraft Cable†	C24
48" Aircraft Cable†	C48
96" Aircraft Cable†	C96
Factory Options	
Air Return	AR
(Overall height for luminaire with Air Return is 4.4")	
Chicago Plenum	CP
(Not available with flex whip)	
Emergency Battery†	EM
with Integral Test Switch	
6' New York City Flex Whip (120V)†	FNY1
6' New York City Flex Whip (277V)†	FNY2
6' Flex Whip†	FW
NSF Listed	NSF
Finish	
Matte Satin White	WH
Matte Satin White Anti-Microbial	WHA

*Aircraft cable mounting not available with Flex Whip options.





5/10* DAY

Options in orange qualify for the Quickship program. 5-day up to 100 pieces, 10-day up to 300 pieces. Emergency Battery is 10-day only. Refer to Quickship Guide for complete details.

Focal Point provides broad flexibility through compatibility with a wide range of indoor lighting control systems. A variety of sensors, nodes, controllers, and drivers can be specified to scale the system and meet the needs of each application across both wired and wireless networks.

Features such as daylight harvesting, occupancy sensing, dimming, and switching help save energy, reduce costs, and enhance occupant comfort. All Connected Solutions luminaires require a compatible building control system.

Controls systems supplied by others. For performance data and additional control system details, please visit the connected solutions manufacturers websites.

Connected Solution	Ordering Code	Model #	Protocol	Compatible Networks (Not all compatible networks may be listed.)	Description	Occupancy & Daylight	Communication to Luminaire	Drivers (Primary drivers are listed in bold . To specify a particular driver please consult factory.)	Driver Type
 WATTSTOPPER[®]									
	WSPC	EN-ZBHA-CLM-DIM	ZigBee	Wattstopper PLUS	Node	Enabled†	Wireless	Advance by Signify	0-10V standard, consult factory for DALI
 COOPER Lighting Solutions									
	WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Sensor	Integrated*	Wireless (WaveLinx Pro Wireless Area Controller)	Advance by Signify	0-10V
 Current									
	NXE1	NXFM2-LV	NX	NX Distributed Intelligence	Controller	Enabled†	Wired	Optotronic by eldoLED	0-10V
 nLIGHT									
	NLT1	nEPS-60-IO	nLight	nLight	Controller	Enabled†	Wired	eldoLED ECOdrive, eldoLED SOLOdrive	0-10V

†Enabled: Luminaire supplied with a node/controller. Sensor to be provided by others.

*Integrated: Luminaire supplied with an installed sensor.