



Skylite® 1x4


FLUORESCENT ASYMMETRIC

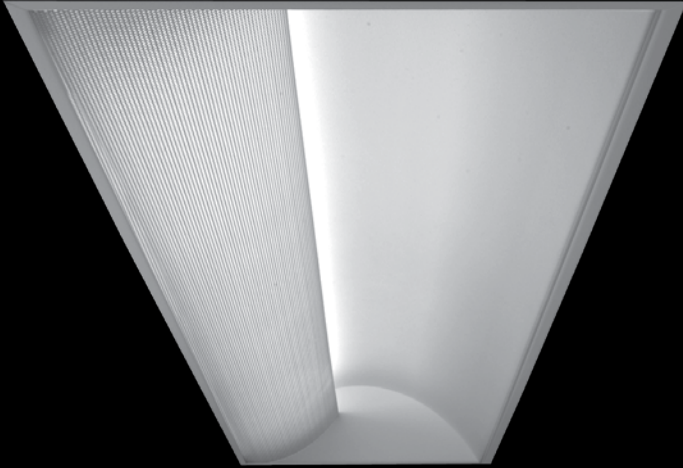


DIMENSIONAL DATA

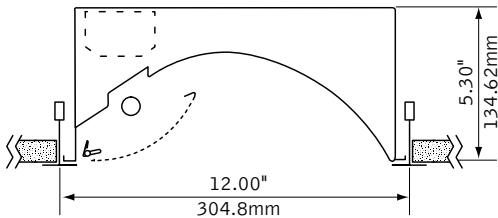

lamping options



T8 LAMPS



T5/T5HO LAMPS

FEATURES

1'x4' recessed asymmetric indirect with perforated side basket.

High reflectance, low gloss Matte White finish controls glare.

Perforated lamp shield swings down for easy relamping.


All luminaire combinations may be continuously row mounted.

Asymmetric distribution illuminates corridors, conference rooms or any area where high angle vertical illumination is desired.

PERFORMANCE

PRODUCT OVERVIEW

Lumen Output: 1786-6160lm
Wattage: 62-120W
Lamping: T5, T5HO, T8



1-Lamp T5HO
62% Efficient
1243 cd @ °

Visit focalpointlights.com for complete photometric data.


fixture:

project:

DETAILS


grid

specify "G" for flat 9/16" and 15/16" tee or "ST" for 9/16" slot tee grid types.



"G" flat tee


Luminaires cannot be installed in T-bar ceiling systems over 1.5" high in T8 lamp configurations.




"ST" slot tee

drywall frame kit

specify "DF" Drywall Frame Kit for drywall ceiling conditions.



Use tie-wire or screws to secure frame kit.



cut out dimensions:
1': Min: 12.25"
Max: 12.563"
4': Min: 48.25"
Max: 48.563"

SPECIFICATIONS

Construction

Copy

One-piece 20 Ga. steel reflector and housing. 22 Ga. perforated shields with white acrylic lens insert. Shield is secured by spring latches that allow for easy relamping. Unit weight: 18 lbs.

Optic

One-piece 20 Ga. steel reflector finished in Matte Satin White powder coat.

Electrical

Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available. Consult factory for dimming specifications and availability.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a 5-stage pre-treatment.

ORDERING

Luminaire Series	FBX
Skylite	FBX
Nominal Size	14
1' x 4'	14
Distribution	W
Asymmetric	W
Lamp Quantity	
One Lamp	1
Two Lamp	2
Lamp Type	
T8	T8
T5	T5
T5HO	T5HO
Ballast	
Electronic Program Start <10% THD	S
0-10V	D7
Lutron 1% 3-wire	DH
Lutron 1% H-Series	DK
Voltage	
120 Volt	120
277 Volt	277
347 Volt	347
(Consult factory for dimming options)	
Mounting	
Drywall Frame Kit	DF
(Cut out dimensions: Min: 12.25"/Max: 12.563" Min:48.25"/Max 48.563")	
Grid	G
Slot Tee	ST
Surface Mount	SM
Shielding	PS
Perforated Shield	PS
Factory Options	
Air Return	AR
Chicago Plenum	CP
Dust Cover	DC
Emergency Battery Pack*	EM
Positional Clip	EQ
HLR/GLR Fuse	FU
6' New York City Flex Whip	FNY
6' Flex Whip	FW
Include 3000K Lamp*	L830
Include 3500K Lamp*	L835
Include 4100K Lamp*	L841
Separate Circuit*	SC
Separate CircuitTandem*	SCT
Labor Saving Master Satellite*	LS
Ballast Saving Tandem*	BST
Finish	WH
Matte White	WH

Skylite® 1x4


FLUORESCENT ASYMMETRIC

FBX-14-W-1-T5HO-E-120-G-PS-WH

Filename: FBX14W1T5HPS.IES
Test #: 12535.0

Lumens: 3081lm
Efficiency 62%

CANDELPower DISTRIBUTION

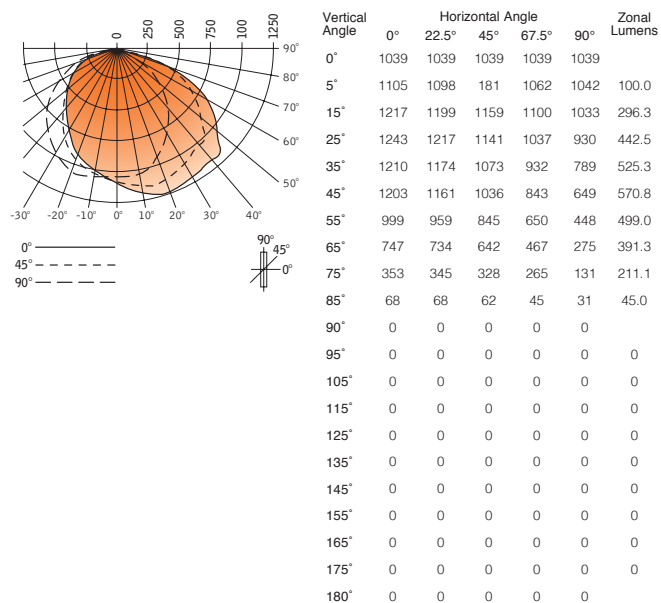

LUMEN SUMMARY

	Zone	Lumens	% Lamp	% Fixture
Total Luminaire	0-30°	839	16.8	27.2
	0-40°	1364	27.3	44.3
	0-60°	2434	48.7	79.0
	0-90°	3081	61.6	100.0
	0-180°	3081	61.6	100.0

Go to www.focalpointlights.com for additional photometric data.