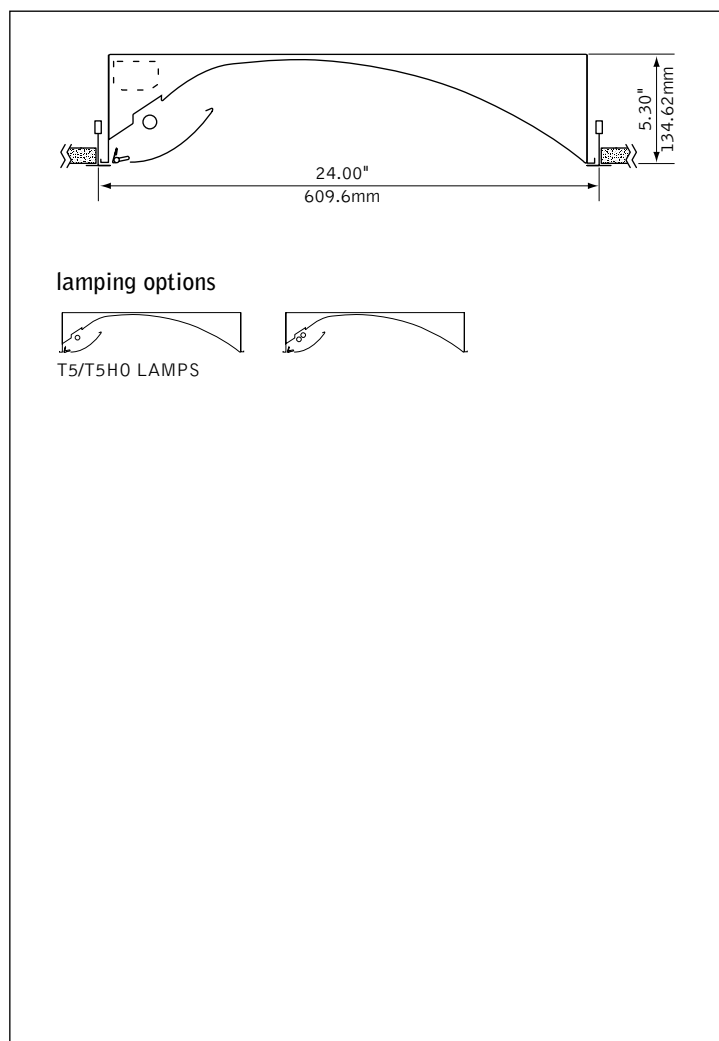


Skylite® 2x2

FLUORESCENT ASYMMETRIC



DIMENSIONAL DATA



FEATURES

2'x2' recessed asymmetric indirect with perforated side basket.

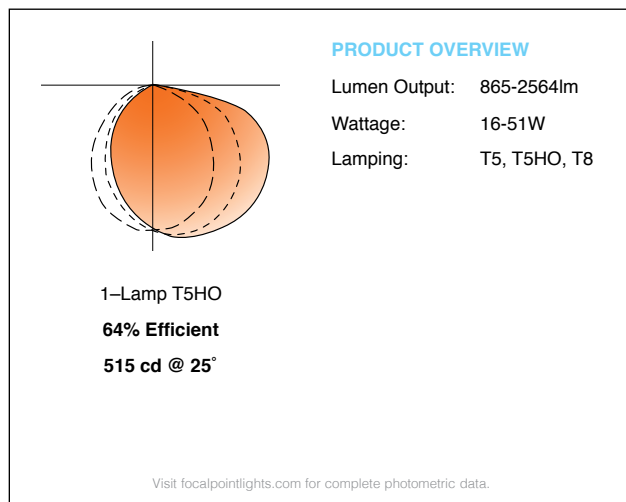
High reflectance, low gloss Matte White finish controls glare.

Perforated lamp shield swings down for easy relamping.

All luminaire combinations may be continuously row mounted.

Asymmetric distribution illuminates corridors, conference rooms or any area where high angle vertical illumination is desired.





PERFORMANCE



fixture:

project:

MOUNTING INFORMATION

<p>grid</p> <p>specify "G" for flat 9/16" and 15/16" tee or "ST" for 9/16" slot tee grid types.</p>		<p>drywall frame kit</p> <p>specify "F" Drywall Frame Kit for drywall ceiling conditions.</p>	
			
"G" flat tee	"ST" slot tee	Use tie-wire or screws to secure frame kit.	cut out dimensions: 2": Min: 24.25" Max: 24.563"

SPECIFICATIONS

Construction

One-piece 20 Ga. steel reflector and housing. 22 Ga. perforated shields with white acrylic lens insert. Shield is secured by spring latches that allow for easy relamping. Unit weight: 12 lbs.

Optic

One-piece 20 Ga. steel reflector finished in Matte Satin White powder coat.

Electrical

Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available. Consult factory for dimming specifications and availability.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a 5-stage pre-treatment.

ORDERING

Luminaire Series	Skylite	FBX
Nominal Size	2' x 2'	22
Distribution	Asymmetric	W
Lamp Quantity	One Lamp	1
	Two Lamp	2
Lamp Type	T5	T5
	T5HO	T5HO
Ballast	Electronic Program Start <10% THD	S
	0-10V	D7
	Lutron 1% 3-wire	DH
	Lutron 1% H-Series	DK
Voltage	120 Volt	120
	277 Volt	277
	347 Volt	347
<small>(Consult factory for dimming options)</small>		
	120/277 Volt	UNV
<small>(Cannot be specified with 1-lamp T5HO dimming or EM option)</small>		
Mounting	Drywall Frame Kit	F
	<small>(Cut out dimensions: Min: 24.25"/Max: 24.563")</small>	
	Grid	G
	Slot Tee	ST
	<small>(Consult factory for availability)</small>	
	Surface Mount	SM
Shielding	Perforated Shield	PS
Factory Options	Chicago Plenum	CP
	Dust Cover	DC
	Emergency Battery Pack*	EM
	Positional Clip	EQ
	HLR/GLR Fuse	FU
	6' New York City Flex Whip	FNY
	6' Flex Whip	FW
	Include 3000K Lamp*	L830
	Include 3500K Lamp*	L835
	Include 4100K Lamp*	L841
	Separate Circuit*	SC
Finish	Matte White	WH