



Covelight™ 26

FLUORESCENT




thru-wire harness

DIMENSIONAL DATA

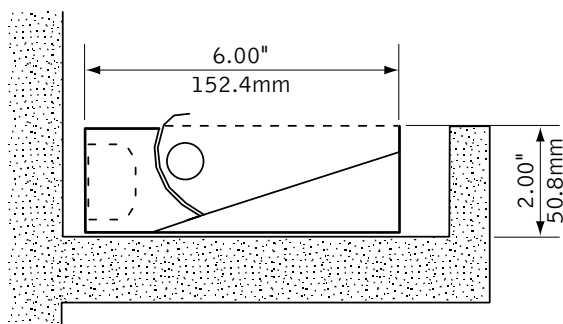


lamping options



T8 LAMPS



T5/T5HO LAMPS



FEATURES

Low profile indirect luminaire designed for concealed cove applications.

Luminaires are provided with quick connect thru-wire harness for easy installation in continuous runs.

Luminaire housing length designed around specified lamp length to minimize socket shadow.

Continuous run lengths may be configured with combinations of luminaire lengths up to 8'.

Covelight™ provides pleasing and even illumination that highlights architectural details.


PERFORMANCE

PRODUCT OVERVIEW

Lumen Output: 2218-7520lm

Wattage: 30-120W

Lamping: T5, T5HO, T8



1-Lamp T5HO

76.6% Efficient


3843 cd @ 125°

Visit focalpointlights.com for complete photometric data.

fixture:

project:

DETAILS

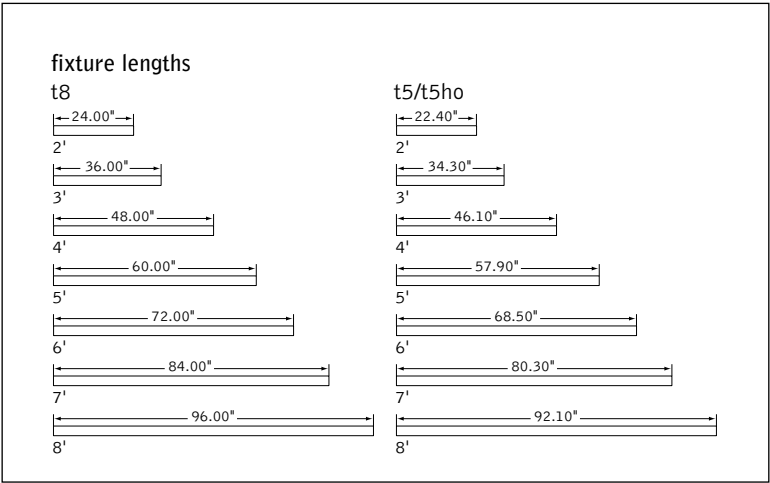

SPECIFICATIONS

Construction

One-piece 20 Ga. housing. 20 Ga. steel socket bridges and galvanized end caps. Luminaires are available up to 8' nominal lengths. T5 and T5HO luminaires are shorter due to lamp length. 4' unit weight: 7 lbs. 8' unit weight: 14 lbs.

Optic

Reflector fabricated of low iridescent, semi specular premium grade aluminum.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Electronic ballasts are thermally protected and have a Class "P" rating. Consult factory for dimming specifications and availability.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a 5-stage pre-treatment. Standard luminaire housing finished in High Reflectance White.

ORDERING

Luminaire Series		
Covelight T5/T5HO	FCVM	
Covelight T8	FCVA	
Profile		26
2" x 6"	26	
Lamping		
One Lamp T8	1T8	
(FCVA only)		
One Lamp T5	1T5	
One Lamp T5HO	1T5HO	
Two Lamp T5	2T5	
Two Lamp T5HO	2T5HO	
(T5 units supplied to match lamp length See Luminaire Lengths chart for more information)		
Circuits		
Single Circuit	1C	
Dual Circuit	2C	
(Two lamps only)		
Voltage		
120 Volt	120	
277 Volt	277	
347 Volt	347	
(Consult factory for dimming options)		
Ballast		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
Mounting		CV
Cove	CV	
Factory Options		
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
HLR/GLR Fuse	FU	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
Finish		HW
High Reflectance White	HW	
Luminaire Length		
Designate length in feet	XX'	
(Nominal lengths: 2',3',4',5',6',7',8')		

Covelight™ 26


FLUORESCENT

FCV-26-2T5HO-1C-120-E-CV-HW-4'

Filename: FCVM262T5H.IES
Test #: 12554.0

Lumens: 7661lm
Efficiency 82.5%

CANDLEPOWER DISTRIBUTION

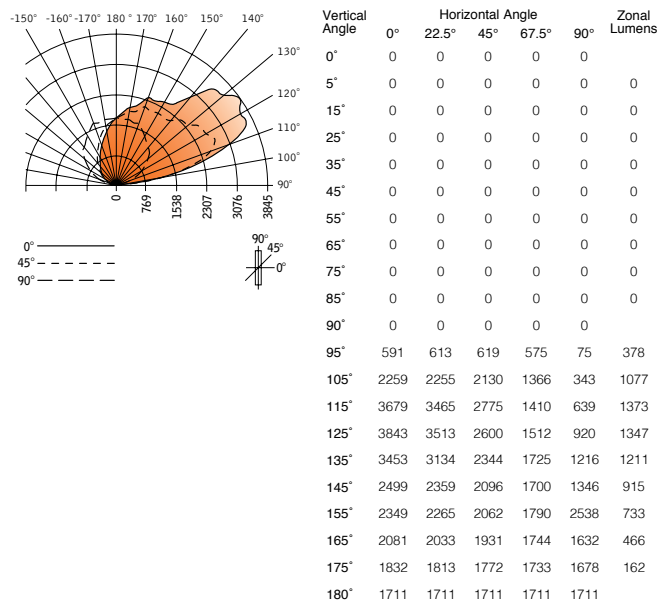

LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixture
90°-120°	2828	28.3	36.9
90°-130°	4175	41.7	54.5
90°-150°	6300	63.0	82.2
90°-180°	7661	76.6	100.0
Total Luminaire	7661	76.6	100.0

Go to www.focalpointlights.com for additional photometric data.

Continuous Runs consist of standard fixture lengths. Some fixtures may exceed nominal length consult individual cut sheets for details.

Example: 31' run = three 8' fixtures and one 7' fixture.

Nominal run length (in feet)	Standard fixture lengths required	Lamp sizes	Nominal run length (in feet)	Standard fixture lengths required	Lamp sizes
2	2	2	32	8 8 8 8	4 4 4 4 4 4 4 4
3	3	3	33	8 8 8 6 3	4 4 4 4 4 4 3 3 3
4	4	4	34	8 8 8 6 4	4 4 4 4 4 4 4 3 3
5	5	5	35	8 8 8 8 3	4 4 4 4 4 4 4 4 3
6	6	3 3	36	8 8 8 8 4	4 4 4 4 4 4 4 4 4
7	7	4 3	37	8 8 8 6 7	4 4 4 4 4 4 4 3 3 3
8	8	4 4	38	8 8 8 8 6	4 4 4 4 4 4 4 4 3 3
9	6 3	3 3 3	39	8 8 8 8 7	4 4 4 4 4 4 4 4 4 3
10	6 4	3 3 4	40	8 8 8 8 8	4 4 4 4 4 4 4 4 4 4
11	8 3	4 4 3	41	8 8 8 8 6 3	4 4 4 4 4 4 4 4 3 3 3
12	8 4	4 4 4	42	8 8 8 8 6 4	4 4 4 4 4 4 4 4 4 3 3
13	7 6	4 3 3 3	43	8 8 8 8 8 3	4 4 4 4 4 4 4 4 4 4 3
14	8 6	4 4 3 3	44	8 8 8 8 8 4	4 4 4 4 4 4 4 4 4 4 4
15	8 7	4 4 4 3	45	8 8 8 8 7 6	4 4 4 4 4 4 4 4 4 3 3 3
16	8 8	4 4 4 4	46	8 8 8 8 8 6	4 4 4 4 4 4 4 4 4 4 3 3
17	8 6 3	4 4 3 3 3	47	8 8 8 8 8 7	4 4 4 4 4 4 4 4 4 4 4 3
18	8 6 4	4 4 4 3 3	48	8 8 8 8 8 8	4 4 4 4 4 4 4 4 4 4 4 4
19	8 8 3	4 4 4 4 3	49	8 8 8 8 8 6 3	4 4 4 4 4 4 4 4 4 4 3 3 3
20	8 8 4	4 4 4 4 4	50	8 8 8 8 8 7 3	4 4 4 4 4 4 4 4 4 4 4 3 3
21	8 7 6	4 4 4 3 3 3			
22	8 8 6	4 4 4 4 3 3			
23	8 8 7	4 4 4 4 4 3			
24	8 8 8	4 4 4 4 4 4			
25	8 8 6 3	4 4 4 4 3 3 3			
26	8 8 6 4	4 4 4 4 4 3 3			
27	8 8 8 3	4 4 4 4 4 4 3			
28	8 8 8 4	4 4 4 4 4 4 4			
29	8 8 7 6	4 4 4 4 4 3 3 3			
30	8 8 8 6	4 4 4 4 4 4 3 3			
31	8 8 8 7	4 4 4 4 4 4 4 3			