


id⁺ 4.5"

LED ADJUSTABLE



clear diffuse



warm diffuse



white painted





downlight with
solite lens



DIMENSIONAL DATA

0-40° Adjustable Accent

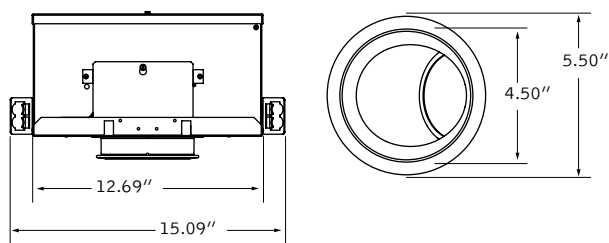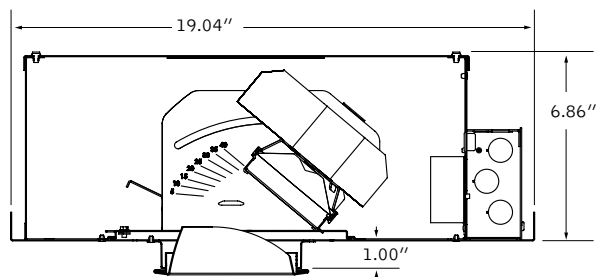

FEATURES

10° beam is ideal for art and object accenting, additional beamreads up to 40° complement any application.


Allows for aiming with locking 40° vertical tilt and 360° rotation of light module.

Center Beam Optic allows maximum light output at all tilt angles.

Selection of dimming drivers available.

Self-flanged Clear Diffuse reflector cone features superior brightness control.

PERFORMANCE



Adjustable Accent at 0° Spot, 3500K


Watts	Delivered Lumens	CBCP
16	1000	19,000
25	1500	27,000
35	2000	36,000
40	2500	39,000

Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

fixture:

project:

HOUSING DETAILS

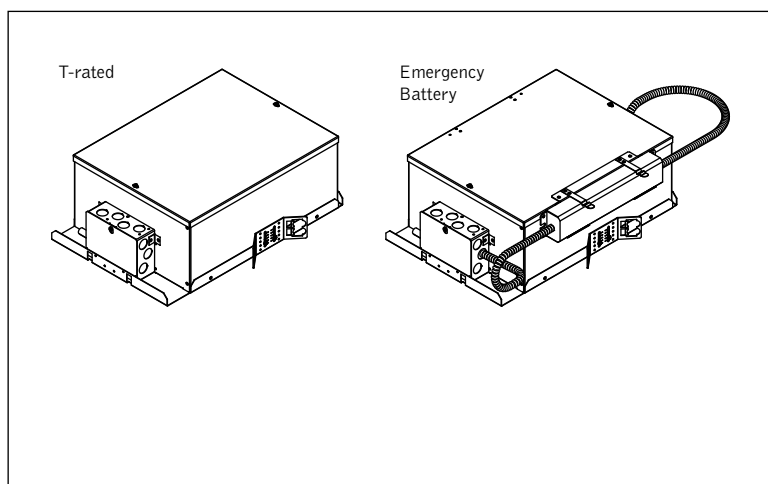

HOUSING SPECIFICATIONS

LED System

Proprietary LED module with single light emitting source. May be specified in 2700K, 3000K, 3500K or 4000K in CRI>80 or CRI>90. Color accuracy within 2 SDCM. Aluminum heat sink provides appropriate thermal management.

Construction

Thermally protected housing for new construction applications. Insulation to be kept 3" away from housing. Butterfly brackets allow mounting to ½ emt. Order bar hangers as an accessory. Extruded aluminum heat sink designed for maximum thermal dissipation. Die-formed housing and integral junction box with (9) 1/2" pry outs. UL & cUL listed for (8) #12 AWG (4 in, 4 out) 90°C conductors and feed through-branch wiring. Accommodates ceiling thicknesses up to 0.5" standard, field adjustable up to 2.5" thickness. For thicker ceiling consult factory. Fixture will not exceed 15 lb.

Adjustment

Manual locking 40° vertical tilt and 360° rotation of light module.

Electrical

Choice of constant current dimming drivers. Power factor > .9 typical.

Emergency Battery

Bodine BSL17-C2. Emergency output—7W for 90 minutes. Maximum mounting height: 20ft. Above ceiling access only.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only. Lensed options Wet Listed.

Lumen Maintenance

Calculated: L80 at 102,000 hours
Derived from EPA TM-21 calculator

Reported: L80 at >36,000 hours

Warranty

LED System rated for operation in ambient environments up to 35°C. 5 year limited warranty.

TRIM SPECIFICATIONS

Aesthetics

Parabolic reflector cone ensures glare free optics. Reflector is .040 spun aluminum. Torsion springs pull trim tight to the ceiling with no visible fasteners within the trim. Overlap trims are self-flanged. Non-painted trim matches reflector finish. White painted flange may also be specified.

Optics

Beamsreads achieved with optical filters that may be easily changed in field.

PERFORMANCE CHART

See Page 3

HOUSING ORDERING

Housing Series		FLCS4
ID+ 4.5" Round Housing	FLCS4	
Trim Type		
Round Flush	RF	
Round Overlap	RO	
Lumen Output		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
Color Temperature		
2700K	27K	
2700K, 90 CRI	927K	
3000K	30K	
3000K, 90 CRI	930K	
3500K	35K	
3500K, 90 CRI	935K	
4000K	40K	
4000K, 90 CRI	940K	
(Not available with 2500 lumens)		
Distribution		
Spot	SP	
(Soft focus lens standard. Remove to achieve 10° beam.)		
Spot with Solite Lens	SPA	
(Not available with Regress Lens Optics CL & SL)		
Narrow Flood	NFL	
Flood	FL	
Linear Spread Lens	LS	
Voltage		
120V	120	
277V	277	
Driver		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
0-10V - 0% Dimming	LZ1	
DALI - 1% Dimming	D11	
Lutron A-Series	L3D	
1% EcoSystem Digital		
(Consult factory for 3-wire control)		
Housing Type		T
Thermally Protected, Non-IC	T	
Factory Options		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery with Remote Test Switch	EMR	
(Above ceiling access only, Not available with 2500 Lmn, RF trim or Chicago Plenum / National Plenum)		

TRIM ORDERING

Aperture		LCS4
4.5" Round Aperture	LCS4	
Trim Type		RD
Round	RD	
Optic		
Adjustable Accent	AA	
Downlight	DN	
Downlight - Regress Clear Lens	CL	
Downlight - Regress Solite Lens	SL	
Reflector Color		
Clear Diffuse	CD	
Warm Diffuse	WD	
Flange Finish		
Non-Painted	NP	
White Painted	WP	

ACCESSORIES

(One kit included per order as indicated in Distribution above. Order additional kits to change distribution in the field as needed.)

Spot Kit	FLCS4/SPK	
Spot with Solite Lens Kit	FLCS4/SPAK	
Narrow Flood Kit	FLCS4/NFLK	
Flood Kit	FLCS4/FLK	
Linear Spread Kit	FLCS4/LSK	

PERFORMANCE CHART AT 0°

Lumen Output	Distribution	Delivered Lumens	System Watts	Beamspread	Center Beam Candlepower (CBCP)
1000 Lumens	Spot	1000	16	10°	19,000
	Narrow Flood	850	16	25°	4,500
	Flood	750	16	40°	1,700
1500 Lumens	Spot	1500	25	10°	27,000
	Narrow Flood	1200	25	25°	7,000
	Flood	1100	25	40°	2,500
2000 Lumens	Spot	2000	36	10°	36,000
	Narrow Flood	1500	36	25°	10,000
	Flood	1500	36	40°	3,400
2500 Lumens	Spot	2500	42	10°	39,000
	Narrow Flood	2100	42	25°	12,000
	Flood	2000	42	40°	4,500

*Lumen output may vary +/- 5%. 3500K Color Temperature.

id[®] 4.5"

LED ADJUSTABLE ACCENT - SPOT

FLCS4-RO-2000L-35K-SP-LD1-T / LCS4-RD-AA-CD-NP

Filename: FLCS4RO2000L35KSPAACD.IES


Lumens: 1674lm

Test #: 1056478

System Watts: 36W

LPW: 47

CANDELPWER DISTRIBUTION



Vertical Angle	Horizontal Angle				
	0°	45°	90°	135°	180°
0°	135	135	135	135	135
5°	276	225	148	196	203
15°	261	273	233	258	235
25°	6055	348	143	111	98
35°	28221	238	39	36	35
45°	1247	41	9	10	10
55°	43	4	1	3	2
65°	4	0	0	0	0
75°	0	0	0	0	0
85°	0	0	0	0	0
90°	0	0	0	0	0

LUMEN SUMMARY

Zone	Lumens	% Fixture
0-30°	476	28.4
0-40°	1540	92.0
0-60°	1673	99.9
0-90°	1674	100.0
Total Luminaire	1674	100.0

FOOTCANDLE VALUES

30° aiming angle - vertical surface

D	C	FC	L	W
18"	2.2'	1181	0.8'	1.0'
24"	2.7'	761	1.2'	1.1'
30"	3.8'	579	1.4'	1.2'
36"	4.3'	428	1.7'	1.3'

Footcandle results based on AGI32; Reflectances=0/0/0; LLF=1

Go to www.focalpointlights.com for additional photometric data.

id[®] 4.5"

LED ADJUSTABLE ACCENT - NARROW FLOOD

FLCS4-RO-2000L-35K-NFL-LD1-T / LCS4-RD-AA-CD-NP

Filename: FLCS4RO2000L35KNFLAACD.IES


Lumens: 1355lm

Test #: 1056475

System Watts: 36W

LPW: 38

CANDELPWER DISTRIBUTION



Vertical Angle	Horizontal Angle				
	0°	45°	90°	135°	180°
0°	178	178	178	178	178
5°	309	259	176	145	141
15°	1284	485	189	174	170
25°	5677	639	142	104	91
35°	8228	405	57	42	39
45°	2213	102	16	14	13
55°	265	20	3	4	3
65°	7	0	0	0	0
75°	0	0	0	0	0
85°	0	0	0	0	0
90°	0	0	0	0	0

LUMEN SUMMARY

Zone	Lumens	% Fixture
0-30°	543	40.0
0-40°	1104	81.5
0-60°	1353	99.8
0-90°	1355	100.0
Total Luminaire	1355	100.0

FOOTCANDLE VALUES

30° aiming angle - vertical surface

D	C	FC	L	W
18"	2.2'	397	1.5'	1.2'
24"	2.7'	274	1.8'	1.3'
30"	3.2'	186	2.2'	1.5'
36"	4.3'	134	2.6'	1.8'

Footcandle results based on AGI32; Reflectances=0/0/0; LLF=1

Go to www.focalpointlights.com for additional photometric data.

id[®] 4.5"

LED ADJUSTABLE ACCENT - FLOOD

FLCS4-RO-2000L-35K-FL-LD1-T / LCS4-RD-AA-CD-NP

Filename: FLCS4RO2000L35KFLAACD.IES


Lumens: 1263lm

Test #: 1056476

System Watts: 36W

LPW: 35

CANDELPWER DISTRIBUTION



Vertical Angle	Horizontal Angle				
	0°	45°	90°	135°	180°
0°	405	405	405	405	405
5°	642	541	399	311	289
15°	1502	869	364	241	223
25°	2478	1031	249	165	152
35°	2860	769	132	95	94
45°	1805	339	46	37	34
55°	574	86	9	9	8
65°	42	2	2	2	2
75°	0	0	0	0	0
85°	0	0	0	0	0
90°	0	0	0	0	0

LUMEN SUMMARY

Zone	Lumens	% Fixture
0-30°	528	41.8
0-40°	911	72.1
0-60°	1254	99.2
0-90°	1263	100.0
Total Luminaire	0-90°	1263
		100.0

FOOTCANDLE VALUES

30° aiming angle - vertical surface

D	C	FC	L	W
18"	1.8'	208	1.6'	1.4'
24"	2.2'	126	2.1'	1.9'
30"	2.7'	83	2.7'	2.3'
36"	3.3'	59	3.1'	2.7'

Footcandle results based on AGI32; Reflectances=0/0/0; LLF=1

Go to www.focalpointlights.com for additional photometric data.

id[®] 4.5"

LED DOWNLIGHT - SPOT

FLCS4-RO-2000L-35K-SP-LD1-T / LCS4-RD-DN-CD-NP

Filename: FLCS4RO2000L35KSPDNCD.IES


Lumens: 1952lm

Test #: 1055570

System Watts: 36W

LPW: 54

CANDELPWER DISTRIBUTION

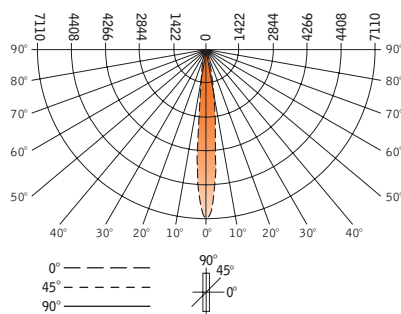

Vertical Angle	Horizontal Angle	
	0°	90°
0°	27415	
5°	33662	
15°	2833	
25°	197	
35°	22	
45°	6	
55°	2	
65°	0	
75°	0	
85°	0	
90°	0	

LUMEN SUMMARY

Zone	Lumens	% Fixture
0-30°	1927	98.8
0-40°	1947	99.8
0-60°	1951	100.0
0-90°	1952	100.0
Total Luminaire	0-90°	1952
		100.0

FOOTCANDLE VALUES

0° aiming angle - horizontal surface

Distance from source	Beam Diameter	Center Beam (FC)
4'	0.7'	2213
6'	1.0'	984
8'	1.4'	553
10'	1.7'	354
12'	2.1'	246

Footcandle results based on AGI32; Reflectances=0/0/0; LLF=1

Go to www.focalpointlights.com for additional photometric data.