





id+ 4.5" Adjustable Accent BEAMSPREAD GUIDE


30° AIMING ANGLE BEAM PATTERNS

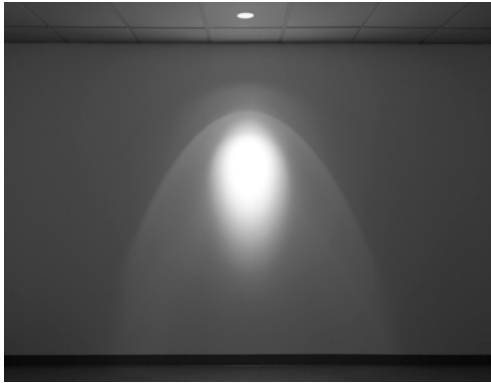


Spot (SP) without Softening Lens
Clear Diffuse Reflector (CD)

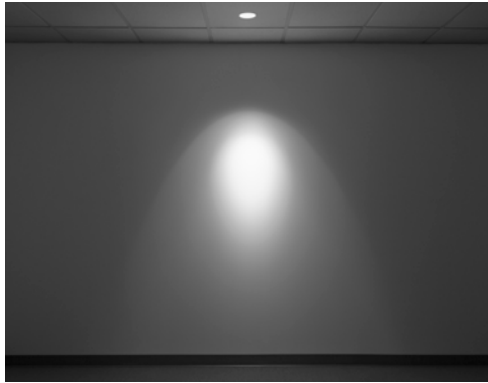

Spot (SP) with Softening Lens
Clear Diffuse Reflector (CD)

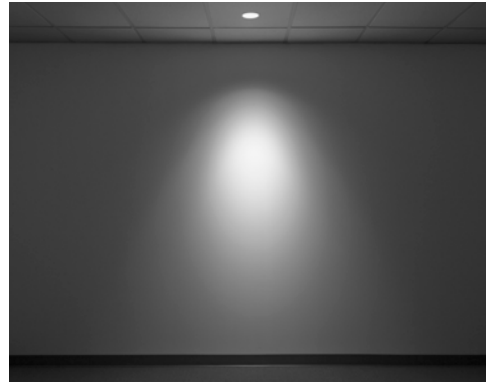

Narrow Flood (NFL)
Clear Diffuse Reflector (CD)

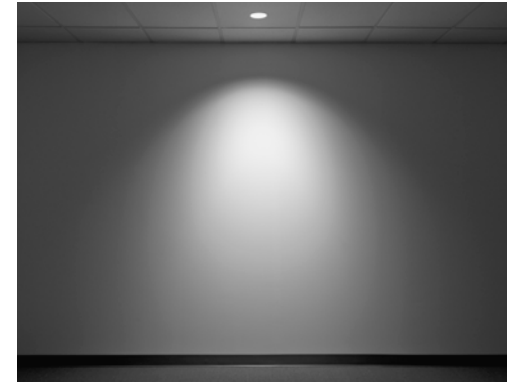


Flood (FL)
Clear Diffuse Reflector (CD)

PERFORMANCE CHART AT 0°

Rated Lumen Output	Distribution	Delivered Lumens	System Watts	Beamspread	Center Beam Candlepower (CBCP)
1000 Lumens	Spot	1000	16	10°	19,000
	Narrow Flood	850	16	25°	4,500
	Flood	750	16	40°	1,700
1500 Lumens	Spot	1500	25	10°	27,000
	Narrow Flood	1200	25	25°	7,000
	Flood	1100	25	40°	2,500
2000 Lumens	Spot	2000	36	10°	36,000
	Narrow Flood	1500	36	25°	10,000
	Flood	1500	36	40°	3,400
2500 Lumens	Spot	2500	42	12°	39,000
	Narrow Flood	2100	42	25°	12,000
	Flood	2000	42	40°	4,500


*Lumen output may vary +/- 5%. 3500K Color Temperature.

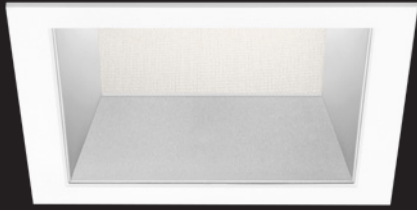


id+ 4.5" Adjustable Accent

BEAMSPREAD GUIDE


30° AIMING ANGLE BEAM PATTERNS

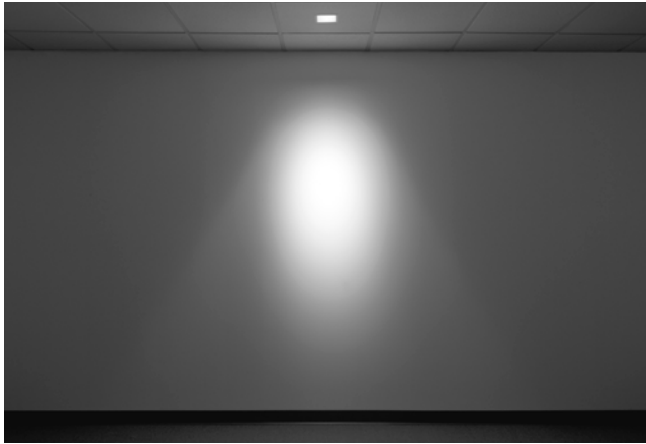

Spot (SP)
Clear Diffuse Reflector (CD)

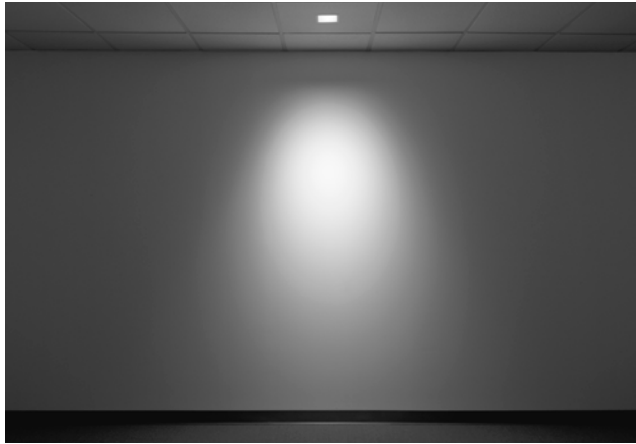

Narrow Flood (NFL)
Clear Diffuse Reflector (CD)

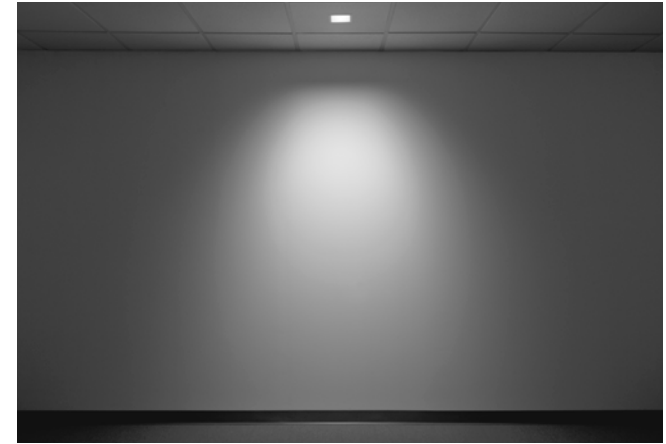

Flood (FL)
Clear Diffuse Reflector (CD)

PERFORMANCE CHART - ADJUSTABLE ACCENT AT 30°

Rated Lumen Output	Distribution	Delivered Lumens	System Watts	Beamspread	Center Beam Candlepower (CBCP)
1000 Lumens	Spot	750	16	10°	9,000
	Narrow Flood	600	16	25°	3,000
	Flood	500	16	40°	1,000
1500 Lumens	Spot	950	25	10°	10,400
	Narrow Flood	800	25	25°	2,700
	Flood	700	25	40°	1000
2000 Lumens	Spot	1,400	36	10°	17,300
	Narrow Flood	1,100	36	25°	4,500
	Flood	1,100	36	40°	1,600
2500 Lumens	Spot	1,800	42	10°	18,000
	Narrow Flood	1,400	42	25°	6,400
	Flood	1,200	42	40°	2,500

*Lumen output may vary +/- 5%. 3500K Color Temperature.