





linear companion

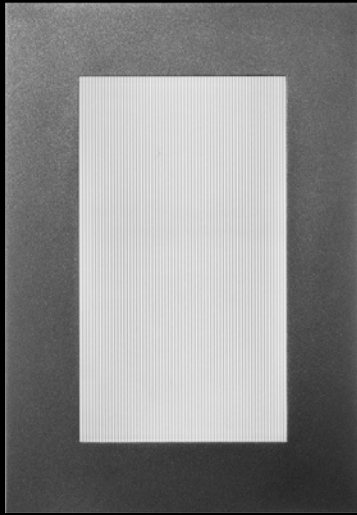


wall mount
companion




pendant companion

DIMENSIONAL DATA

1' fixture



2', 3' & 4' fixtures

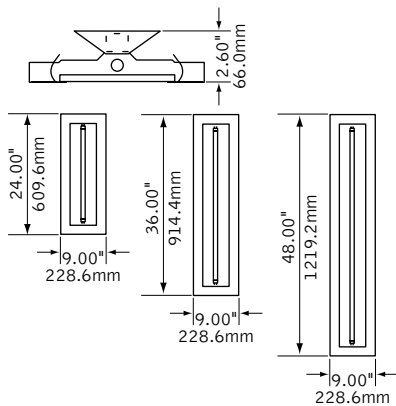

lampping options

1' fixture



2', 3' & 4' fixtures



FEATURES

ADA compliant wall scone that compliments entire Metro™ family.

1', 2', 3' and 4' nominal lengths provide endless design capabilities


Soft glow around luminaire creates perception of a floating luminous diffuser.

Metro™ makes an exceptional aesthetic statement in conference rooms, private or open offices, reception areas or other high-end applications.

PERFORMANCE

PRODUCT OVERVIEW

Lumen Output: 984-2766lm
Wattage: 19-63W
Lamping: BiAx, T5, T5HO




1-Lamp 18W BiAx
79% Efficient
345 cd @ 90°

Visit focalpointlights.com for complete photometric data.

fixture:

project:

MOUNTING INFORMATION

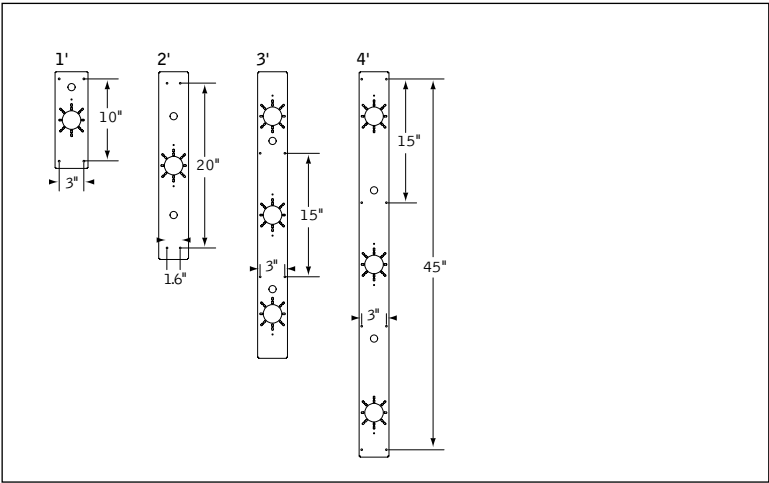

SPECIFICATIONS

Construction

Three piece ballast channel and frame fabricated from 20 Ga. die-formed C.R.S. Standard sizes available in nominal 1', 2', 3' and 4' lengths. Hinged door allows for easy lamp access. 1' unit weight: 5 lbs., 2' unit weight: 8 lbs., 3' unit weight: 12 lbs., 4' unit weight: 16 lbs.

Optic

Reflector fabricated of low iridescent, specular aluminum. Luminous diffuser constructed of optical grade acrylic with linear diffusing pattern. Acrylic diffuser for (1') 4.75W x 8.75"L, (2') 4.75W x 19.5"L, (3') 4.75W x 32.8"L and (4') 4.75W x 43.5"L.

Electrical

All ballasts are thermally protected and have a Class "P" rating.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a 5-stage pre-treatment. Mounting bracket finished to match housing.

ORDERING

Luminaire Series		FMEC
Metro		
Profile		
1' Length	1	
2' Length	2	
3' Length	3	
4' Length	4	
Lamping		
1' Length Only		
1 Lamp 18 Watt Biax	1BX18	
(Electronic Program Start only)		
2', 3' & 4' Lengths Only		
1 Lamp T5	1T5	
1 Lamp T5HO	1T5HO	
Circuit		1C
Single Circuit	1C	
Voltage		
120 Volt	120	
277 Volt	277	
347 Volt	347	
(Consult factory for availability and dimming options)		
Ballast		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
Mounting		WM
Wall Mount	WM	
Factory Options		
Emergency Battery Pack*	EM	
(4' unit only)		
HLR/GLR Fuse	FU	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
Finish		
Titanium Silver	TS	
Matte Satin Housing	WH	

Metro™


FLUORESCENT

FMEC-1-1BX18-1C-120-S-WM-TS

Filename: FMEC11BX18.IES
Test #: 11831.0

Lumens: 984lm
Efficiency: 78.7%

CANDELPWER DISTRIBUTION

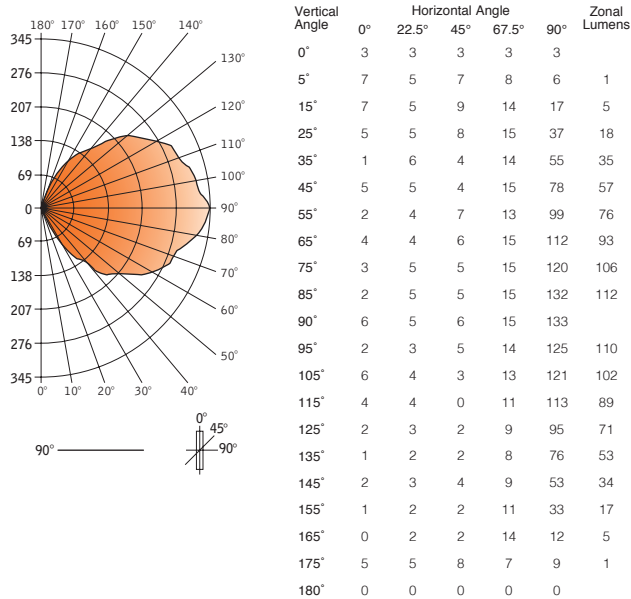

LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixture
0°-30°	23	1.9	2.4
0°-90°	502	40.2	51.0
90°-130°	373	29.8	37.9
90°-180°	482	38.5	49.0
Total Luminaire	984	78.7	100.0

Go to www.focalpointlights.com for additional photometric data.

Metro™


FLUORESCENT

FMEC-4-1T5HO-IC-S-120-WM-TS

Filename: FMEC41T5H.IES
Test #: 14085.0

Lumens: 2766lm
Efficiency: 55%

CANDELPWER DISTRIBUTION

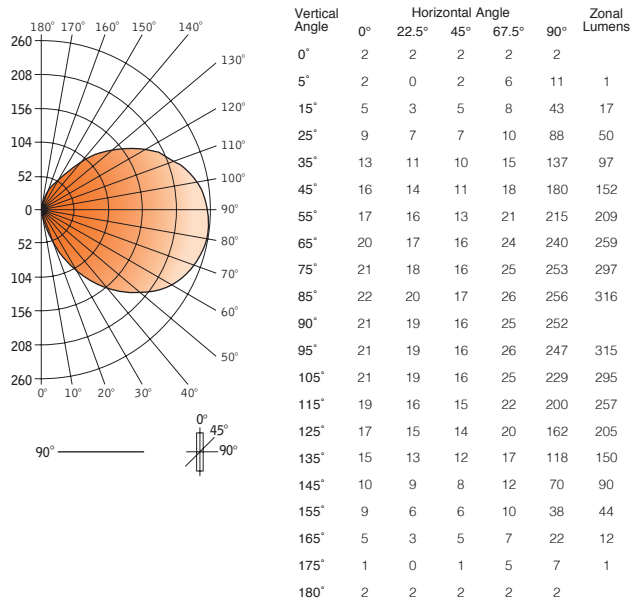

LUMEN SUMMARY

Zone	Lumens	% Lamp	% Fixture
0-30°	68	1.4	2.4
0-40°	1397	27.9	50.5
0-60°	1072	21.4	38.8
0-90°	1369	27.4	49.5
Total Luminaire	2766	55.3	100.0

Go to www.focalpointlights.com for additional photometric data.