



Seem[®] 2


LED WALL MOUNT




0.5" pop-down lens



1.5" pop-down lens



end detail



suspended companion




The Naturals collection - Walnut shown




recessed companion



wall to ceiling companion




perimeter companion



direct/indirect companion

DIMENSIONAL DATA

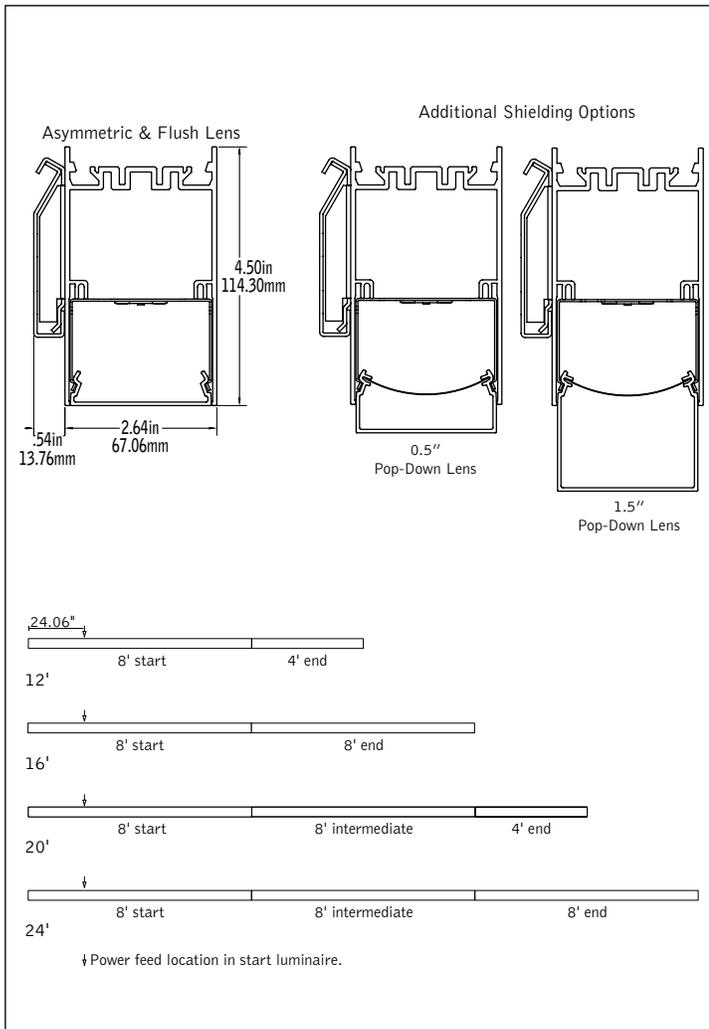

FEATURES

Narrow 2.5" linear direct LED with Asymmetric, Flush, 0.5" or 1.5" Pop-Down lens.


Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.

Individual units and continuous runs in 1' increments.





PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Available with The Naturals, a series of finishes that exude biophilic beauty.

DISTRIBUTIONS

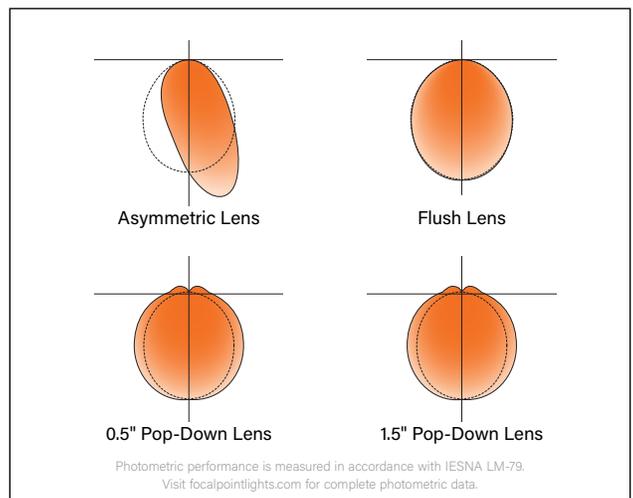

4' PERFORMANCE CHART

| Shielding | Lumens per Foot | Delivered Lumens | Tested System Watts | LPW |
|----------------------------------------------------------------------------------------------------------|-----------------|------------------|---------------------|-----|
| Asymmetric Lens  | 125LF | 500 | 5.64 | 89 |
| | 250LF | 1000 | 8.24 | 121 |
| | 375LF | 1500 | 11.22 | 134 |
| | 500LF | 2000 | 14.53 | 138 |
| | 625LF | 2500 | 17.93 | 139 |
| | 750LF | 3000 | 22.22 | 135 |
| | 875LF | 3500 | 26.00 | 135 |
| Flush Lens  | 1000LF | 4000 | 29.84 | 134 |
| | 125LF | 500 | 5.48 | 91 |
| | 250LF | 1000 | 8.87 | 113 |
| | 375LF | 1500 | 12.17 | 123 |
| | 500LF | 2000 | 15.84 | 126 |
| | 625LF | 2500 | 19.65 | 127 |
| | 750LF | 3000 | 24.45 | 123 |
| Pop Down 0.5" Lens  | 875LF | 3500 | 28.65 | 122 |
| | 1000LF | 4000 | 33.12 | 121 |
| | 125LF | 500 | 5.72 | 87 |
| | 250LF | 1000 | 9.35 | 107 |
| | 375LF | 1500 | 12.91 | 116 |
| | 500LF | 2000 | 16.89 | 118 |
| | 625LF | 2500 | 21.70 | 115 |
| Pop Down 1.5" Lens  | 750LF | 3000 | 26.14 | 115 |
| | 875LF | 3500 | 30.69 | 114 |
| | 1000LF | 4000 | 35.43 | 113 |
| | 125LF | 500 | 5.56 | 90 |
| | 250LF | 1000 | 9.02 | 111 |
| | 375LF | 1500 | 12.40 | 121 |
| | 500LF | 2000 | 16.17 | 124 |
| 625LF | 2500 | 20.06 | 125 | |
| 750LF | 3000 | 24.96 | 120 | |
| 875LF | 3500 | 29.33 | 119 | |
| 1000LF | 4000 | 33.72 | 119 | |

Based on 3500k, 80CRI, 4' lengths. Lumen multiple 90+ CRI = 0.86
Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%

Declare.

Seem Linear Luminaires Focal Point, LLC

Final Assembly: Chicago, IL, USA

Life Expectancy: 10 Year(s)

End of Life Options: Recyclable (55%), Landfill (45%)

Ingredients:

Aluminum Alloy 6063; UNS G10080 Steel Alloy; Small Electrical Components - RoHS Compliant¹; Copper; Polymethyl methacrylate; Steel; Poly[imino(1,6-dioxo-1,6-hexanedyl)imino-1,6-hexanedyl]; **Polyvinyl chloride**; Aluminum Alloy 6061; UNS S30400 Stainless Steel Alloy; Steel manufacture, chemicals; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Nylon 6; **Benzene, ethenyl-, homopolymer, brominated; Bis(pentabromophenyl) ether (decabromodiphenyl ether) (DecaBDE)**; Tris(2-ethylhexyl) trimellitate; Zinc; Methyl methacrylate; Antimony oxide (Antimony trioxide); Kaolin, calcined; Octadecanoic acid, calcium salt; Steel, carbon

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:

- LBC Red List Free % Disclosed: 100% at 100ppm
- LBC Red List Approved VOC Content: Not Applicable
- Declared

I-10 Interior Performance: Not Applicable

I-14 Responsible Sourcing: Not Applicable

FPL-0003

EXP. 01 FEB 2027

Original Issue Date: 2024

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

Finishes



STANDARD FINISHES



WHITE WH BLACK BK TITANIUM SILVER TS

THE NATURALS (25% SCALE)



LIGHT OAK LOK GRAY ELM GRE CHESTNUT CHT WALNUT WLT WOVEN LINEN WLN

Ordering Guide



Direct Only Linear Circuitry, Zones & Factory Options

HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

| TOTAL RUN LENGTH: <u>32ft</u> | | JOB NAME: _____ | | | FIXTURE TYPE: _____ | | | | |
|--------------------------------|-----------------|-----------------|--------------------------------------|--------------|---------------------|---------------------------|-------------------|------------|----|
| EXAMPLE | HOUSING SECTION | SECTION LENGTH | SHARED ELECTRICAL FEED, NORMAL POWER | | | FACTORY OPTIONS | | | |
| | | | SWITCHING CIRCUIT | DIMMING ZONE | DAYLIGHT ZONE | SEPARATE ELECTRICAL FEEDS | | | EM |
| | | | | | | DAYLIGHT CIRCUIT | EMERGENCY CIRCUIT | ECD | |
| 1 | 8 | 1C | 1Z | | | | | 1EM | |
| 2 | 8 | 2C | 2Z | | | | | | |
| 3 | 8 | 2C | 2Z | | | | | | |
| 4 | 8 | | | | 1DC | | | | |
| Totals / Ordering Codes | | 2C | 2Z | | 1DC | | | 1EM | |

ORDERING: FSM4L-FL-625LF-35K- **2C2Z** -UNV-LD1-G2- **1DC-1EM** -WH-32ft

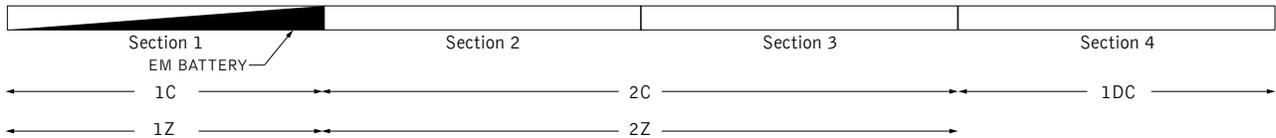

| KEY | |
|---------------------------------------------------------------|----------------------------------------------------------------------------|
| C = Switching Circuit Switched Hot / Shared Neutral | DC = Daylight Circuit Switched Hot / Separate Neutral |
| Z = Dimming Zone Dimming Control Wires | EC = Emergency Circuit Switched Hot / Separate Neutral |
| DL = Daylight Zone Daylight Dimming Control Wires | EM = Emergency Battery Unswitched Hot / Shared Neutral |
| | ECD = Emergency Control Device Unswitched Hot / Separate Neutral |

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



FOCAL POINT®

| TOTAL RUN LENGTH: _____ | | JOB NAME: _____ | | | FIXTURE TYPE: _____ | | | |
|--------------------------------|-------------------|--------------------------------------|--------------|---------------|---------------------------|--|--|----|
| HOUSING SECTION | SECTION LENGTH | SHARED ELECTRICAL FEED, NORMAL POWER | | | FACTORY OPTIONS | | | EM |
| | | SWITCHING CIRCUIT | DIMMING ZONE | DAYLIGHT ZONE | SEPARATE ELECTRICAL FEEDS | | | |
| DAYLIGHT CIRCUIT | EMERGENCY CIRCUIT | | | | ECD | | | |
| 1 | | | | | | | | |
| 2 | | | | | | | | |
| 3 | | | | | | | | |
| 4 | | | | | | | | |
| 5 | | | | | | | | |
| 6 | | | | | | | | |
| 7 | | | | | | | | |
| 8 | | | | | | | | |
| 9 | | | | | | | | |
| 10 | | | | | | | | |
| 11 | | | | | | | | |
| 12 | | | | | | | | |
| 13 | | | | | | | | |
| 14 | | | | | | | | |
| 15 | | | | | | | | |
| 16 | | | | | | | | |
| 17 | | | | | | | | |
| 18 | | | | | | | | |
| 19 | | | | | | | | |
| 20 | | | | | | | | |
| Totals / Ordering Codes | | | | | | | | |

WORKSHEET

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

| Run length (ft) | Housing Configuration Section Lengths | Run length (ft) | Housing Configuration Section Lengths | Run length (ft) | Housing Configuration Section Lengths | Run length (ft) | Housing Configuration Section Lengths |
|-----------------|---------------------------------------|-----------------|---------------------------------------|-----------------|---------------------------------------|-----------------|---------------------------------------|
| 9 | 5 + 4 | 21 | 8 + 8 + 5 | 33 | 8 + 8 + 8 + 5 + 4 | 45 | 8 + 8 + 8 + 8 + 8 + 5 |
| 10 | 6 + 4 | 22 | 8 + 8 + 6 | 34 | 8 + 8 + 8 + 6 + 4 | 46 | 8 + 8 + 8 + 8 + 8 + 6 |
| 11 | 7 + 4 | 23 | 8 + 8 + 7 | 35 | 8 + 8 + 8 + 7 + 4 | 47 | 8 + 8 + 8 + 8 + 8 + 7 |
| 12 | 8 + 4 | 24 | 8 + 8 + 8 | 36 | 8 + 8 + 8 + 8 + 4 | 48 | 8 + 8 + 8 + 8 + 8 + 8 |
| 13 | 8 + 5 | 25 | 8 + 8 + 5 + 4 | 37 | 8 + 8 + 8 + 8 + 5 | | |
| 14 | 8 + 6 | 26 | 8 + 8 + 6 + 4 | 38 | 8 + 8 + 8 + 8 + 6 | | |
| 15 | 8 + 7 | 27 | 8 + 8 + 7 + 4 | 39 | 8 + 8 + 8 + 8 + 7 | | |
| 16 | 8 + 8 | 28 | 8 + 8 + 8 + 4 | 40 | 8 + 8 + 8 + 8 + 8 | | |
| 17 | 8 + 5 + 4 | 29 | 8 + 8 + 8 + 5 | 41 | 8 + 8 + 8 + 8 + 5 + 4 | | |
| 18 | 8 + 6 + 4 | 30 | 8 + 8 + 8 + 6 | 42 | 8 + 8 + 8 + 8 + 6 + 4 | | |
| 19 | 8 + 7 + 4 | 31 | 8 + 8 + 8 + 7 | 43 | 8 + 8 + 8 + 8 + 7 + 4 | | |
| 20 | 8 + 8 + 4 | 32 | 8 + 8 + 8 + 8 | 44 | 8 + 8 + 8 + 8 + 8 + 4 | | |

Standard run configurations, consult factory for custom configurations.