Seem 2 LED Perimeter CONNECTED (S

FSM2PR | GRID/TRIMLESS DRYWALL





FOCAL POINT

BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS




POWER OFF



POWER ON

COMPONENT KEY

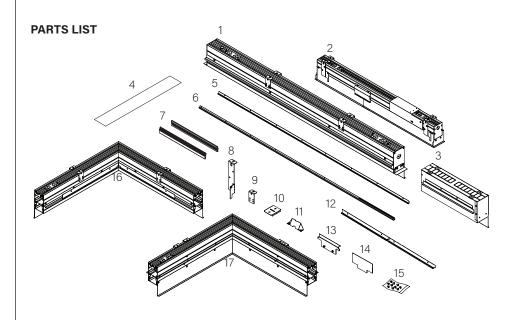

1 Housing

2 Adjustable housing

3 Sliding sleeve (ss) (shipped installed. SSB indicates a sliding sleeve at both ends)

4 Finish plate

5 J-rail

6 Z-rail

7 Housing rail kit

8 Tie-wire/grid bracket

9 Tie-wire bracket

10 Joiner bracket

11 Joiner blocker

12 Corner j-rail

13 Lens end piece

14 Lens tool

15 Hardware bag

16 Outside corner

17 Inside corner

BY OTHERS:

Grid ceiling -15/16" or 9/16" flat tee main

runner required

for finish edge.

HOUSING TYPES - 4' SHOWN



INDIVIDUAL (MAY INCLUDE SLIDING SLEEVES)








INTERMEDIATE








END (SHOWN WITH SLIDING SLEEVE)


ADJUSTABLE HOUSING

WALL/CEILING PREPARATION

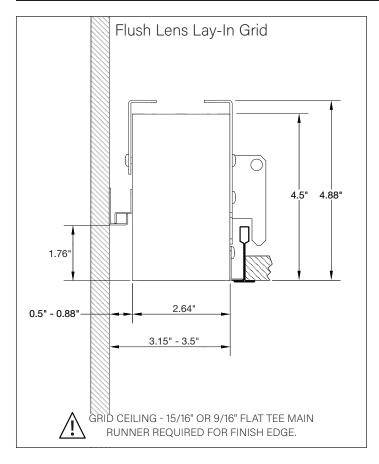


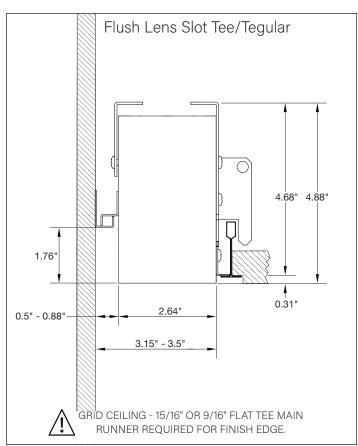


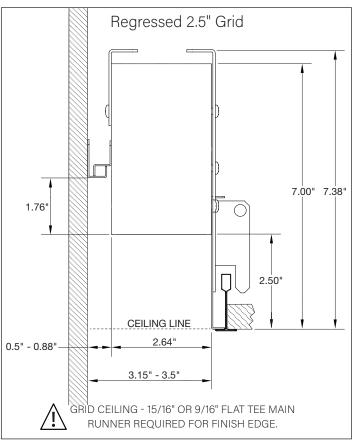

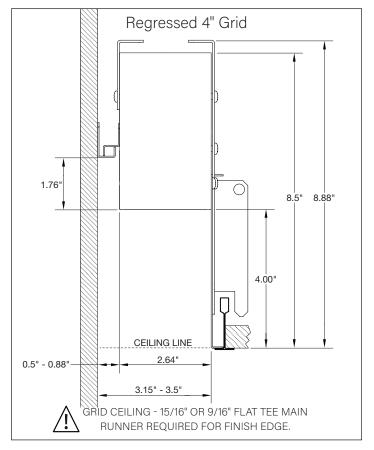


WALL/CEILING PREPARATION

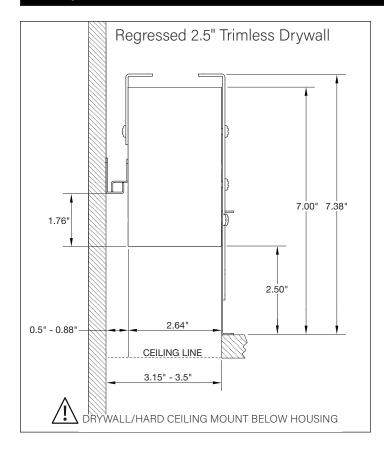


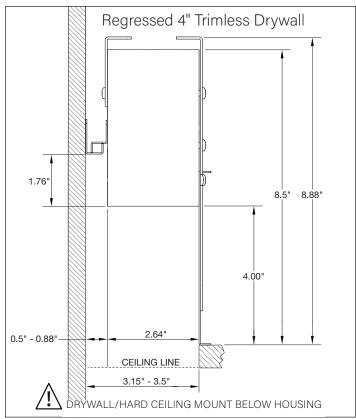

OPTIONAL

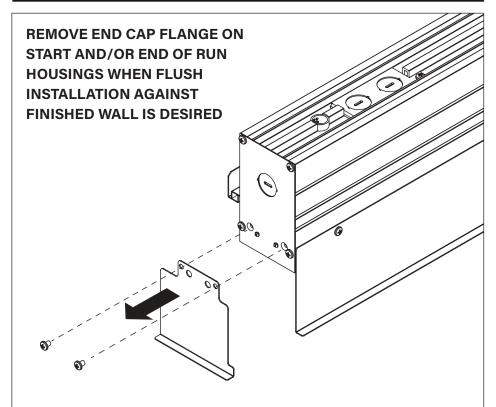







FOCAL POINT RECOMMENDS STARTING WITH CORNER INSTALLATION IF APPLICABLE


BASIC INSTALLATION, STEPS 1-14 ADJUSTABLE HOUSING, PAGE 5 SLIDING SLEEVES, PAGE 6 CORNERS, PAGE 7

SLIDING SLEEVE PAIRS (SSB) START & END WITH A SLIDING SLEEVE


BASIC INSTALLATION











START, INTERMEDIATE, & END UNITS ONLY































EMERGENCY





SEE BATTERY MANUFACTURER
INSTRUCTIONS


EMERGENCY MAXIMUM MOUNTING HEIGHT FROM FLOOR TO SURFACE OF LENS:


19.00'


ADJUSTABLE HOUSING

















SLIDING SLEEVES



MAX LENGTH 12" PER SLEEVE



SLIDING SLEEVE DOES NOT INTEGRATE WITH ADJUSTABLE HOUSING


SINGLE SLIDING SLEEVE (SS):


EXAMPLE: 21' RUN LENGTH - 20' HOUSING = 12" SLIDING SLEEVE





SLIDING SLEEVE PAIR (SSB):


 $\label{eq:example:ex$




























CORNERS





















DRIVER SERVICE






START, INTERMEDIATE, & END UNITS ONLY


START, INTERMEDIATE, & END UNITS ONLY





GRID ONLY


WATTSTOPPER






























ENLIGHTED



















WAVELINX




















WAVELINX

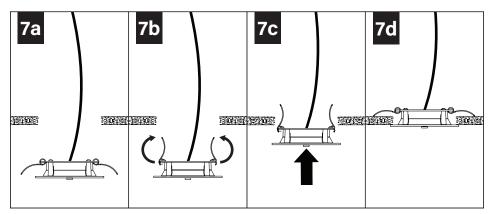






ACUITY nLIGHT













WATTSTOPPER



HUBBELL NX





LUTRON ATHENA

