



Seem® 4


LED DIRECT/INDIRECT WALL MOUNT



flush lens
top & bottom




0.5" pop-up lens /
flush lens bottom



linear suspended
companion



The Naturals collection - Light Oak shown




direct only
companion



wall to ceiling
corner companion

DIMENSIONAL DATA

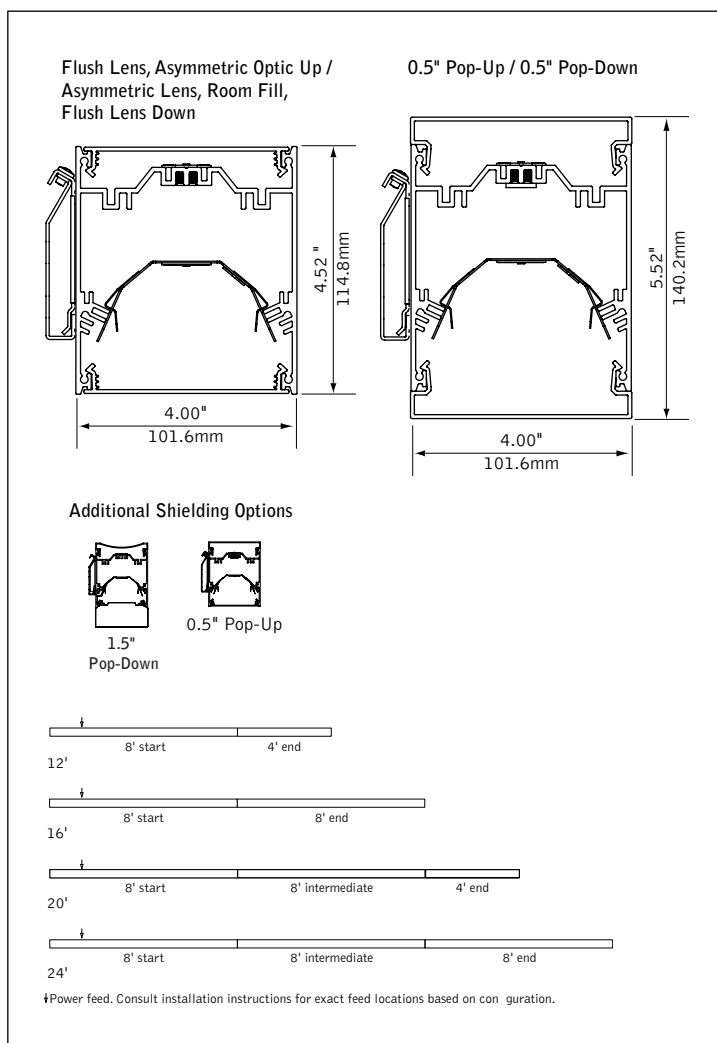

FEATURES

Narrow extruded aluminum 4" direct/indirect wall mount LED Pop-lens options.

Individual units and continuous runs in 1' increments.

Frosted acrylic lenses provide uninterrupted illumination, without pixels or shadows.

LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels and light distributions to meet a wide variety of application needs.


PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Tunable White: Supports human activity, well-being, and preferences with a light quality that evolves throughout the day.


Available with The Naturals, a series of finishes that exude biophilic beauty.

PERFORMANCE

INDIRECT

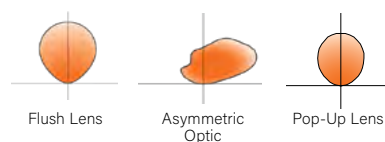

DIRECT

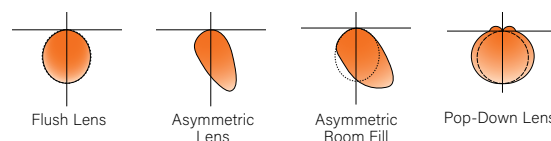


Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

fixture:


project:

DETAILS

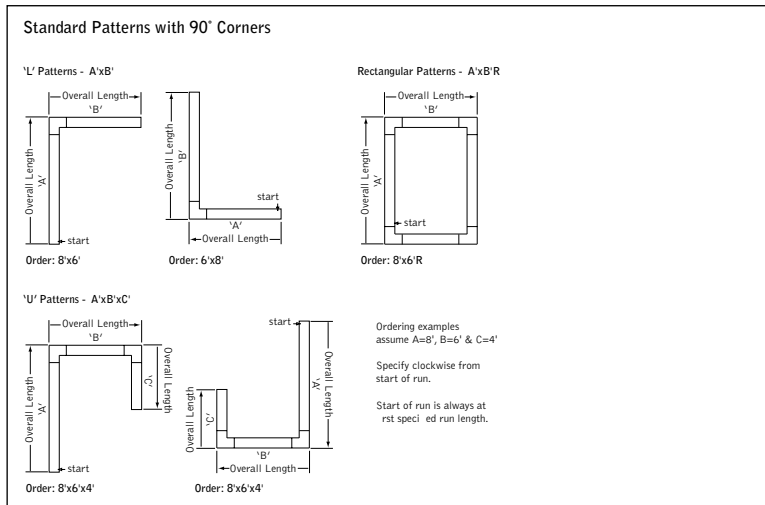


DIRECT ASYMMETRIC

Standard Application Example

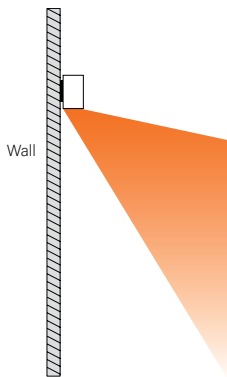

DIRECT ASYMMETRIC ROOM FILL

Standard Application Example

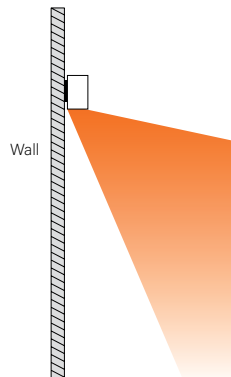

Asymmetric Room Fill Lens

The asymmetric room fill optic projects light into the space to evenly illuminate horizontal planes. It is ideal to light rooms and corridors from the perimeter, resulting in superior efficacy and uniformity on the floor.

STANDARD WHITE

Luminaire Series

Seem 4 Direct/Indirect LED

Shielding

(Combine Indirect and Direct options to create a single code.)

Indirect/Top Shielding Options

Asymmetric Optic

Flush Lens

0.5" Pop-Up Lens

AS

FL

PU

Direct/Bottom Shielding Options

Asymmetric Lens

Asymmetric Room Fill

Flush Lens Bottom

0.5" Pop-Down Bottom

AS

AF

FL

PD05

Direct Distribution

275 Lumens per foot 275DN

375 Lumens per foot 375DN

625 Lumens per foot 625DN

875 Lumens per foot 875DN

1000 Lumens per foot* 1000DN

1125 Lumens per foot* 1125DN

1250 Lumens per foot* 1250DN

*(Not available with Pop Down Lens)

Indirect Distribution

275 Lumens per foot 275UP

375 Lumens per foot 375UP

625 Lumens per foot 625UP

875 Lumens per foot 875UP

1000 Lumens per foot 1000UP

1125 Lumens per foot* 1125UP

1250 Lumens per foot* 1250UP

*(Not available with Pop-Up or Pop-Down Lenses)

Color Temperature

2700K, 80+ CRI or 2700K, 90+ CRI 27K or 927K

3000K, 80+ CRI or 3000K, 90+ CRI 30K or 930K

3500K, 80+ CRI or 3500K, 90+ CRI 35K or 935K

4000K, 80+ CRI or 4000K, 90+ CRI 40K or 940K

Circuits & Zones

1 Circuit, non-emergency 1C

2 non-emergency circuits provide independent control of Direct and Indirect sources 2C

Consult Ordering Guide for multiple circuiting and zoning options

_C_Z_DL

Voltage

120/277 UNV Volt UNV

Low Voltage LV

Control System & Dimming Level

0-10V - 10% Dimming LD1

0-10V - 1% Dimming L11

Low Voltage, PoE compatible LVN

(No driver. Not available with EM or EC. LV Voltage only.)

Lutron Hi-Lume EcoSystem (LDE1) - LH1

1% Dimming

DALI - 1% Dimming D11

(625 lumens per foot max.)

Mounting

Wall Mount WM

Factory Options

(See Ordering Guide for ordering details for DC, EC, EM & ECD.)

Daylight Circuit _DC

Emergency Circuit _EC

Emergency Battery Pack† _EM

Emergency Control Device† _ECD

†(4' minimum. 120/277 Volt Only. EM or ECD not available at corners.)

Finish

(See finishes page for The Naturals options)

Black BK

Titanium Silver TS

Matte White Housing WH

Luminaire Length

(3' minimum length. Leave blank for patterns. Lengths are nominal)

Specify luminaire/row length in 1' increments X'

(Smaller increments available. Consult factory.)

Pattern Options

'L' pattern (5' minimum length) A' x B'

'U' pattern (7' minimum length) A' x B' x C'

Rectangular pattern (7' minimum length) A' x B'R

(Consult factory for other pattern options)




Options in orange qualify for the Quickship program. Run lengths in 1' increments, 1000' total. Refer to Quickship Guide for complete details.

fixture:

project:

DETAILS

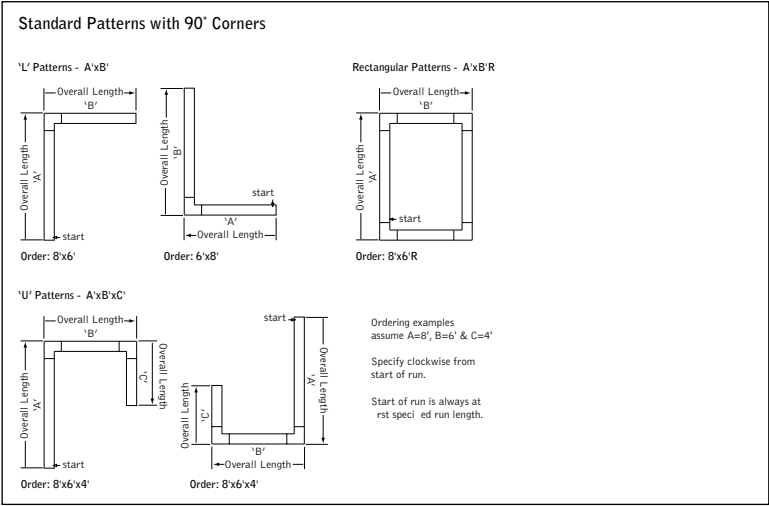

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with >80 or 90 CRI, 3 SDCM or Tunable White (2700K-6500K), CRI>80, >90. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. Die cast aluminum end caps.
3' unit weight: 14.5lbs, 4' unit weight: 19lbs, 5' unit weight: 25lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .085" thick with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency Battery

Bodine BSL310LP. Emergency output - 10 watts for 90 minutes.
Maximum mounting height: 14.12ft

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. The Naturals: 100% low VOC vinyl.

Lumen Maintenance

Reported: L70 at >61,000 hours Calculated: L70 at 395,000 hours
Reported: L90 at >61,000 hours Calculated: L90 at 100,000 hours
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5 year limited warranty.



TUNABLE WHITE

Luminaire Series		FSM4BW
Seem 4 Direct/Indirect LED Shielding		FSM4BW
(Combine Indirect and Direct options to create a single code.)		
Indirect/Top Shielding Options	Flush Lens	FL
	0.5" Pop-Up Lens	PU
Direct/Bottom Shielding Options	Flush Lens Bottom	FL
	0.5" Pop-Down Bottom	PD05
Direct Distribution		
275 Lumens per foot (4' min with FLFL or PUFL)		275DN
375 Lumens per foot		375DN
625 Lumens per foot		625DN
875 Lumens per foot		875DN
1000 Lumens per foot*		1000DN
1125 Lumens per foot*		1125DN
*(Not available with Pop Down Lens)		
Indirect Distribution		
275 Lumens per foot		275UP
375 Lumens per foot		375UP
625 Lumens per foot		625UP
875 Lumens per foot		875UP
1000 Lumens per foot		1000UP
1125 Lumens per foot		1125UP
(Not available with Pop-Up or Pop-Down lenses)		
Color Temperature		
Tunable White: 2700-6500K, 80+ CRI		2765T
Tunable White: 2700-6500K, 90+ CRI		92765T
Circuits & Zones		
1 Circuit, non-emergency		1C
2 non-emergency circuits provide independent control of Direct and Indirect sources		2C
Consult Ordering Guide for multiple circuiting and zoning options		_C_Z_DL
Voltage		UNV
120/277 UNV Volt		UNV
Control System & Dimming Level		D1TW
DALI - 1% Dimming (Default driver offers DT6 control. It requires two addresses, one for intensity & one for CCT tuning. Consult factory for DT8. Extended lead time applies.)		D1TW
Mounting		WM
Wall Mount		WM
Factory Options		
(See Ordering Guide for ordering details for DC, EC, EM & ECD.)		
Daylight Circuit		_DC
Emergency Circuit		_EC
Emergency Battery Pack [†]		_EM
Emergency Control Device [†] (Consult factory)		_ECD
Finish		
(See finishes page for The Naturals options)		
Black		BK
Titanium Silver		TS
Matte White Housing		WH
Luminaire Length		
(3' minimum length. Leave blank for patterns. Lengths are nominal)		
Specify luminaire/row length in 1' increments (Smaller increments available. Consult factory.)		X'
Pattern Options		
'L' pattern (5' minimum length)		A' x B'
'U' pattern (7' minimum length)		A' x B' x C'
Rectangular pattern (7' minimum length) (Consult factory for other pattern options)		A' x B'R

4' PERFORMANCE CHART

Direct Distribution	Indirect Distribution	Distribution % (Direct/Indirect)	Total Nominal Lumens	Tested System Watts	Lumens Per Watt (LPW)									Tested System Watts	Lumens Per Watt (LPW)		
																	
275DN	275	50/50	2200	18.2	137	136	132	132	131	128	123	123	119	21.2	118	110	108
	375	42/58	2600	20.8	144	143	139	138	137	133	124	124	121	23.8	126	117	111
	625	31/69	3600	27.9	146	146	143	138	138	135	122	121	119	30.9	132	122	112
	875	24/76	4600	36.0	147	146	144	138	137	135	120	119	118	39.0	136	125	112
	1000	22/78	5100	40.0	147	146	144	137	137	135	119	118	117	43.0	137	126	112
	1125	20/80	5600	44.0	146	146	144	136	136	134	—	—	—	47.0	137	126	—
	1250	18/82	6100	46.9	135	135	133	135	135	134	—	—	—	49.9	128	129	—
375DN	275	58/42	2600	21.2	141	140	135	137	136	131	129	128	124	25.4	117	108	108
	375	50/50	3000	23.8	147	146	141	141	140	136	129	128	124	28.0	123	114	110
	625	38/62	4000	30.9	148	147	144	141	140	137	125	125	122	35.1	130	120	112
	875	30/70	5000	39.0	146	148	145	140	139	137	123	122	120	43.2	133	123	112
	1000	27/73	5500	43.0	148	148	145	139	139	136	121	121	119	47.1	134	124	112
	1125	25/75	6000	47.0	148	147	145	138	138	135	—	—	—	51.2	135	124	—
	1250	23/77	6500	49.9	137	136	134	137	137	135	—	—	—	54.1	126	126	—
625DN	275	69/31	3600	30.1	139	138	132	136	135	129	130	129	124	38.5	111	102	105
	375	63/37	4000	32.6	144	142	137	139	138	133	130	129	124	41.1	116	107	107
	625	50/50	5000	39.8	145	144	140	139	138	134	127	126	123	48.2	122	112	109
	875	42/58	6000	47.8	146	145	141	139	138	135	124	124	121	56.3	126	116	109
	1000	38/62	6500	51.8	146	145	141	138	138	134	123	123	120	60.2	127	117	109
	1125	36/64	7000	55.9	146	145	141	138	137	134	—	—	—	64.3	128	117	—
	1250	33/67	7500	58.8	136	136	133	137	136	133	—	—	—	67.2	122	120	—
875DN	275	76/24	4600	39.1	138	136	130	135	134	128	130	129	123	49.3	106	98	102
	375	70/30	5000	41.7	141	139	133	138	136	130	130	129	124	51.9	110	102	104
	625	58/42	6000	48.8	143	142	136	138	137	132	128	127	122	59.0	116	107	106
	875	50/50	7000	56.9	144	143	138	138	137	133	125	125	121	67.1	120	110	107
	1000	47/53	7500	60.8	144	143	138	137	137	133	124	123	120	71.0	121	111	107
	1125	44/56	8000	64.9	144	143	139	137	136	132	—	—	—	75.1	122	112	—
	1250	41/59	8500	67.8	136	135	132	136	135	132	—	—	—	78.0	123	113	—
1000DN	275	78/22	5100	43.7	136	135	128	134	133	126	130	129	123	—	—	—	—
	375	73/27	5500	46.2	138	138	132	137	135	129	130	129	123	—	—	—	—
	625	62/38	6500	53.4	140	140	134	137	136	131	128	127	122	—	—	—	—
	875	53/47	7500	61.4	141	141	136	137	136	131	125	125	121	—	—	—	—
	1000	50/50	8000	65.4	141	142	137	137	136	131	124	124	120	—	—	—	—
	1125	47/53	8500	69.5	141	142	137	136	135	131	—	—	—	—	—	—	—
	1250	44/56	9000	72.4	135	134	131	135	135	131	—	—	—	—	—	—	—
1125DN	275	80/20	5600	48.3	135	134	127	133	132	125	129	128	122	—	—	—	—
	375	75/25	6000	50.9	138	136	130	135	134	127	129	128	122	—	—	—	—
	625	64/36	7000	58.0	140	138	133	136	135	129	127	126	121	—	—	—	—
	875	56/44	8000	66.0	141	140	135	136	135	130	125	124	120	—	—	—	—
	1000	53/47	8500	70.0	141	140	135	136	135	130	124	123	119	—	—	—	—
	1125	50/50	9000	74.1	141	140	135	135	134	130	—	—	—	—	—	—	—
	1250	47/53	9500	77.0	135	134	130	135	134	130	—	—	—	—	—	—	—
1250DN	275	82/18	6100	52.1	122	122	119	135	121	117	118	118	114	—	—	—	—
	375	77/23	6500	54.7	125	125	121	136	123	120	119	119	115	—	—	—	—
	625	67/33	7500	61.8	128	128	125	137	125	122	118	118	115	—	—	—	—
	875	59/41	8500	69.9	130	130	127	137	126	123	118	118	115	—	—	—	—
	1000	56/44	9000	73.8	131	131	128	137	127	124	117	117	115	—	—	—	—
	1125	53/47	9500	77.9	131	132	129	136	127	124	—	—	—	—	—	—	—
	1250	50/50	10000	80.8	126	126	124	136	127	124	—	—	—	—	—	—	—

*Based on 3500K, 80CRI, 4' lengths. *Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%. Pop-Up Lens/Pop-down lens lumen output may vary +/- 5%



4' PERFORMANCE CHART

Direct Distribution	Indirect Distribution	Distribution % (Direct/Indirect)	Total Nominal Lumens	Lumens Per Watt (LPW)				Lumens Per Watt (LPW)			
				FLFL		PUFL		FLPD05		PUPD05	
				Tested System Watts¹		Tested System Watts¹		Tested System Watts¹		Tested System Watts¹	
275	275	50/50	2200	20.4	108	21.9	101	22.8	97	24.2	91
	375	42/58	2600	23.7	110	26.2	99	26.0	100	28.6	91
	625	31/69	3600	33.1	109	37.5	96	35.4	102	39.9	90
	875	24/76	4600	42.8	107	49.5	93	45.2	102	51.8	89
	1000	22/78	5100	47.5	107	55.0	93	49.8	102	57.3	89
	1125	20/80	5600	52.5	107	—	—	54.8	102	—	—
375	1250	18/82	6100	57.5	106	—	—	59.8	104	—	—
	275	58/42	2600	24.1	108	25.6	102	27.9	93	29.4	89
	375	50/50	3000	27.4	109	29.9	100	31.2	96	33.7	89
	625	38/62	4000	36.8	109	41.2	97	40.6	99	45.0	89
	875	30/70	5000	46.5	107	53.2	94	50.3	99	57.0	88
	1000	27/73	5500	51.2	108	58.7	94	54.9	100	62.5	88
625	1125	25/75	6000	56.2	107	—	—	60.0	100	—	—
	1250	23/77	6500	61.2	106	—	—	65.0	102	—	—
	275	69/31	3600	34.6	104	36.1	100	41.4	87	42.8	84
	375	63/37	4000	37.9	106	40.4	99	44.6	90	47.2	85
	625	50/50	5000	47.2	106	51.7	97	54.0	93	58.5	86
	875	42/58	6000	57.0	105	63.6	94	63.8	94	70.4	85
875	1000	38/62	6500	61.6	105	69.2	94	68.4	95	75.9	86
	1125	36/64	7000	66.7	105	—	—	73.4	95	—	—
	1250	33/67	7500	71.6	105	—	—	78.4	96	—	—
	275	76/24	4600	45.6	101	47.0	98	55.7	83	57.2	80
	375	70/30	5000	48.9	102	51.4	97	59.0	85	61.5	81
	625	58/42	6000	58.2	103	62.7	96	68.4	88	72.8	82
1000	875	50/50	7000	68.0	103	74.6	94	78.1	90	84.8	83
	1000	47/53	7500	72.6	103	80.2	94	82.8	91	90.3	83
	1125	44/56	8000	77.7	103	—	—	87.8	91	—	—
	1250	41/59	8500	82.6	103	—	—	92.8	92	—	—
	275	78/22	5100	50.9	100	52.3	98	—	—	—	—
	375	73/27	5500	54.1	102	56.7	97	—	—	—	—
1125	625	62/38	6500	63.5	102	68.0	96	—	—	—	—
	875	53/47	7500	73.3	102	79.9	94	—	—	—	—
	1000	50/50	8000	77.9	103	85.4	94	—	—	—	—
	1125	47/53	8500	82.9	103	—	—	—	—	—	—
	1250	44/56	9000	87.9	102	—	—	—	—	—	—
	275	80/20	5600	56.6	99	58.0	97	—	—	—	—
1250	375	75/25	6000	59.8	100	62.3	96	—	—	—	—
	625	64/36	7000	69.2	101	73.7	95	—	—	—	—
	875	56/44	8000	79.0	101	85.6	93	—	—	—	—
	1000	53/47	8500	83.6	102	91.1	93	—	—	—	—
	1125	50/50	9000	88.6	102	—	—	—	—	—	—
	1250	47/53	9500	93.6	102	—	—	—	—	—	—
1250	275	90/10	6100	62.4	98	63.8	96	—	—	—	—
	375	85/15	6500	65.6	99	68.2	95	—	—	—	—
	625	73/27	7500	75.0	100	79.5	94	—	—	—	—
	875	65/35	8500	84.8	100	91.4	93	—	—	—	—
	1000	61/39	9000	89.4	101	96.9	93	—	—	—	—
	1125	58/42	9500	94.4	101	—	—	—	—	—	—
1250	1250	55/45	10000	99.4	101	—	—	—	—	—	—

*Based on 2700K, 90CRI, 4' lengths. *Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%. Pop-Up Lens/Pop-down lens lumen output may vary +/- 5%.

Lumen Multipliers

CRI	Multiplier
80+	1.16
90+	1.00

Wattage Multipliers

CCT	Multiplier
2700K	1.00
3000K	0.96
3500K	0.92
4000K	0.89
5000K	0.88
5700K	0.87

Finishes



STANDARD FINISHES



THE NATURALS (25% SCALE)



Ordering Guide

Bidirectional Linear Circuitry, Zones & Factory Options



HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 24ft		JOB NAME:			FIXTURE TYPE:			
	HOUSING SECTION	SECTION LENGTH	LIGHT DISTRIBUTION	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS		
				SEPARATE ELECTRICAL FEEDS			EM		
	SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD			
	1	8	Indirect	1C	1Z				
			Direct				1EC		
2	8	Indirect	1C	1Z					
		Direct	2C	2Z					
3	8	Indirect	1C	1Z					
		Direct	2C	1DL					
Totals / Ordering Codes				2C	2Z	1DL		1EC	

ORDERING: FSM4BS-FL-625UP-125DN-35K- 2C2Z1DL -UNV-LD1-C24- 1EC -WH-24ft

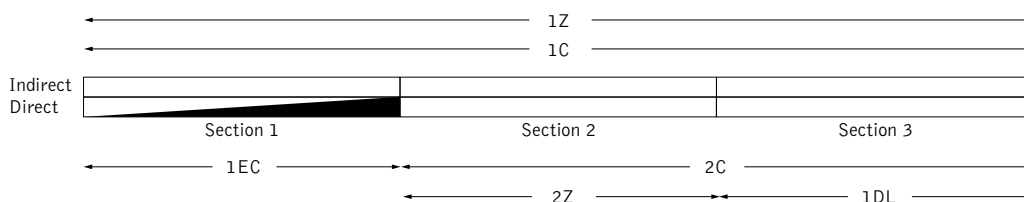

KEY

C = Switching Circuit
Switched Hot / Shared Neutral

Z = Dimming Zone
Dimming Control Wires

DL = Daylight Zone
Daylight Dimming Control Wires

DC = Daylight Circuit
Switched Hot / Separate Neutral

EC = Emergency Circuit
Switched Hot / Separate Neutral

ECD = Emergency Control Device
Unswitched Hot / Separate Neutral

EM = Emergency Battery
Unswitched Hot / Shared Neutral

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- EC, EM, and ECD only available for direct distribution.
- One shared or isolated circuit and zone required per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Limit of one EM or ECD per housing section.
- Each EC, DC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



FOCAL POINT®

TOTAL RUN LENGTH: _____			JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	LIGHT DISTRIBUTION	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
						DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
1		Indirect							
		Direct							
2		Indirect							
		Direct							
3		Indirect							
		Direct							
4		Indirect							
		Direct							
5		Indirect							
		Direct							
6		Indirect							
		Direct							
7		Indirect							
		Direct							
8		Indirect							
		Direct							
9		Indirect							
		Direct							
10		Indirect							
		Direct							
11		Indirect							
		Direct							
12		Indirect							
		Direct							
Totals / Ordering Codes									

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.