


Seem® 4

LED - SURFACE MOUNT | WET LOCATION




The Naturals collection - Light Oak shown

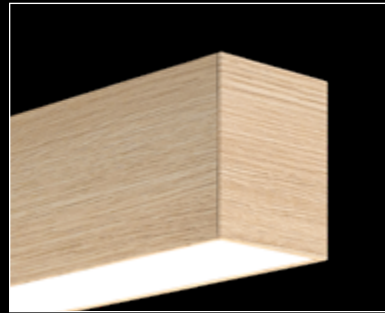

recessed companion

DIMENSIONAL DATA

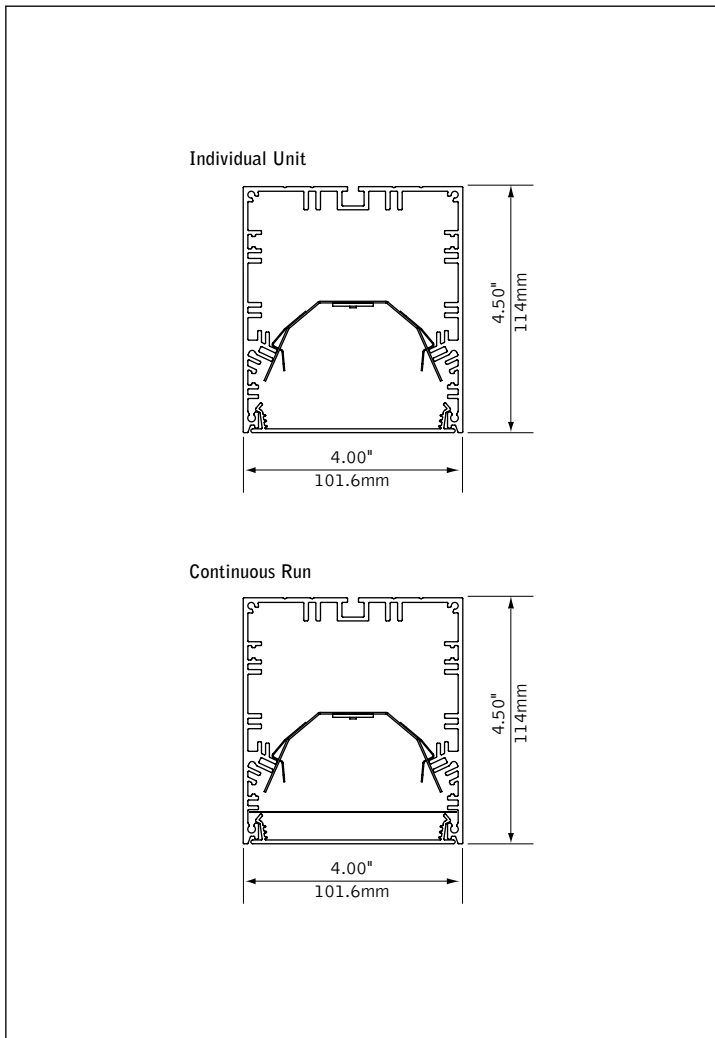

FEATURES

Narrow extruded aluminum 4" linear direct LED.

Individual units and continuous runs in 1' increments.

Available in flush, asymmetric, asymmetric room fill or batwing, lens.


LED position and lens material optimized to provide the perfect blend of high performance and visual comfort.

Choice of output levels to meet a wide variety of application needs.

Tunable White: Supports human activity, well-being, and preferences with a light quality that evolves throughout the day.

Available with The Naturals, a series of finishes that exude biophilic beauty.


PERFORMANCE

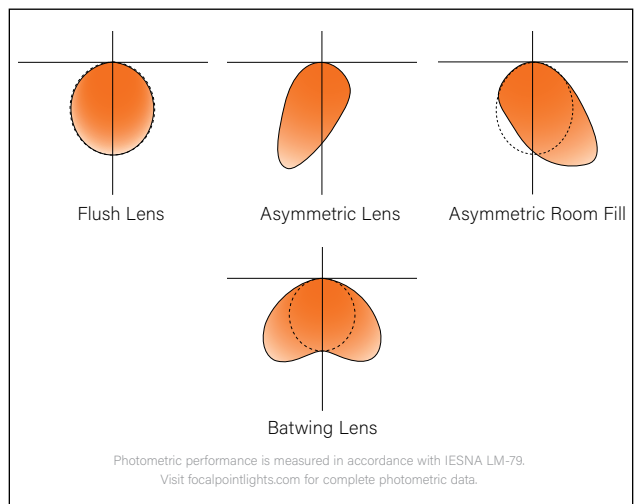

fixture:

project:

DETAILS

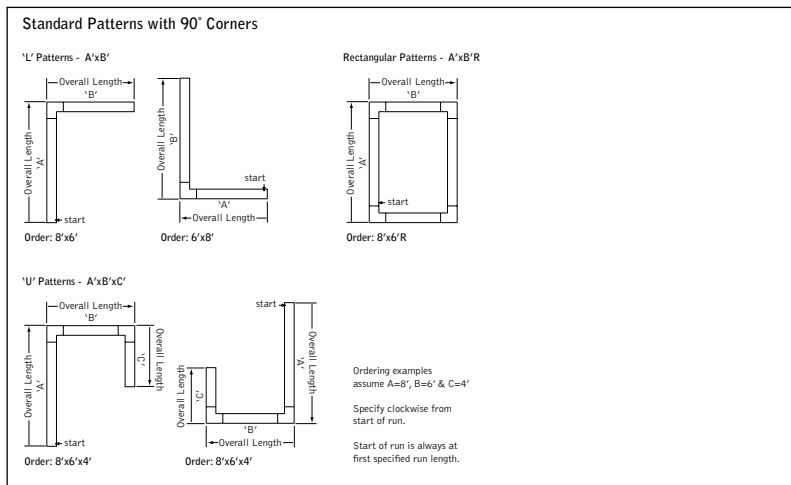

4' PERFORMANCE CHART


Lumen Output	Nominal Lumens	BW		FL		AS		AF	
		Tested System Watts	LPW	Tested System Watts	LPW	Tested System Watts	LPW	Tested System Watts	LPW
275LF	1100	8.8	125	9.1	121	8.5	130	8.6	128
375LF	1500	11.3	133	11.7	129	10.8	138	11	137
625LF	2500	19	131	19.9	126	18.3	137	18.5	135
875LF	3500	27	130	27.9	125	25.9	135	26.2	133
1000LF	4000	31.1	129	32.2	124	29.8	134	30.2	132
1125LF	4500	35.4	127	36.6	123	33.9	133	34.4	131
1250LF	5000	39.8	126	41.2	121	38.1	131	38.6	129

Based on 3500K, 80 CRI, 4' lengths. Lumen multiplier: 90+ CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.



STANDARD WHITE

Luminaire Series	FSM4LWLS
Seem 4 LED Wet Location	FSM4LWLS
Shielding	
Asymmetric Lens*	AS
Asymmetric Room Fill*	AF
Batwing Lens*	BW
Flush Satin Lens	FL
(*individual units only)	
Lumen Output	
275 Lumens per foot (LD1 & L11 only)	275LF
375 Lumens per foot (LD1 & L11 only)	375LF
625 Lumens per foot (3' minimum with LH1)	625LF
875 Lumens per foot	875LF
1000 Lumens per foot	1000LF
1125 Lumens per foot	1125LF
1250 Lumens per foot	1250LF
Color Temperature	
2700K, 80+ CRI or 90+ CRI	27K or 927K
3000K, 80+ CRI or 90+ CRI	30K or 930K
3500K, 80+ CRI or 90+ CRI	35K or 935K
4000K, 80+ CRI or 90+ CRI	40K or 940K
Circuits & Zones	
1 Circuit, non-emergency	1C
Consult Ordering Guide on page 3 for multiple circuiting and zoning options	_C_Z_DL
Voltage	UNV
120/277 UNV Volt	UNV
Control System & Dimming Level	
0-10V - 10% Dimming	LD1
0-10V - 1% Dimming	L11
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming (3' minimum length)	LH1
Mounting	SM
Surface Mount	SM
Factory Options	
(See page 4 for ordering details for DC, EC, EM & ECD.)	
Daylight Circuit	_DC
Emergency Circuit	_EC
Emergency Battery Pack†	_EM
Emergency Control Device†	_ECD
†(4' minimum. 120/277 Volt only. EM or ECD not available at corners.)	
IP65 Rated (individual units only)	IP65
NSF Listed	NSF
Outdoor Rated (LD1 only. Not available with EM.)	OD
Finish	
(See finishes page for The Naturals options)	
Matte White Housing	WH
Luminaire Length	
Specify luminaire/row length in 1' increments (2' minimum length.)	X'
Pattern Options	
(3' minimum length)	
'L' pattern	A' x B'
'U' pattern	A' x B' x C'
Rectangular pattern	A' x B'R

DETAILS

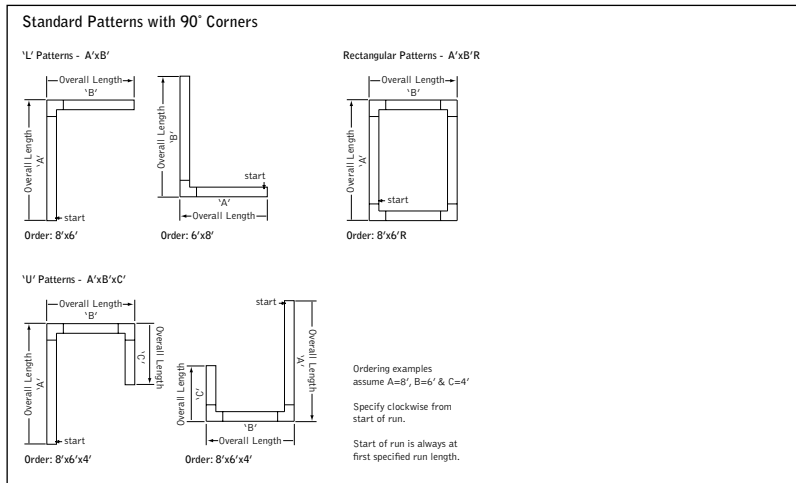

TW 4' PERFORMANCE CHART

Lumen Output	Nominal Lumens	LPW			
		BW		FL	
		Tested System Watts		Tested System Watts	
275LF	1100	10.4	106	10.8	102
375LF	1500	13.9	108	14.5	104
625LF	2500	24.1	104	24.9	100
875LF	3500	34.8	101	35.9	97
1000LF	4000	40.1	100	41.2	97
1125LF	4500	45.6	99	46.9	96

Based on 2700K, 90CRI, 4' lengths. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Lumen Multipliers

CRI	Multiplier
80+	1.16
90+	1.00

Wattage Multipliers

CCT	Multiplier
2700K	1.00
3000K	0.96
3500K	0.92
4000K	0.89
5000K	0.88
5700K	0.87



TUNABLE WHITE

Luminaire Series	FSM4LWLS
Seem 4 LED Wet Location	
Shielding	
Batwing Lens	BW
(individual units only)	
Flush Satin Lens	FL
Lumen Output	
275 Lumens per foot (3' min. with D1TW)	275LF
375 Lumens per foot	375LF
625 Lumens per foot	625LF
875 Lumens per foot	875LF
1000 Lumens per foot	1000LF
1125 Lumens per foot	1125LF
Color Temperature	
Tunable White: 2700-6500K, 80+ CRI	2765T
Tunable White: 2700-6500K, 90+ CRI	92765T
Circuits & Zones	
1 Circuit, non-emergency	1C
Consult Ordering Guide on page 3 for multiple circuiting and zoning options	_C_Z_DL
Voltage	UNV
120/277 UNV Volt	UNV
Control System & Dimming Level	D1TW
DALI - 1% Dimming (Default driver offers DT6 control. It requires two addresses, one for intensity & one for CCT tuning. Consult factory for DT8. Extended lead time applies.)	
Mounting	SM
Surface Mount	SM
Factory Options	
(See page 4 for ordering details for DC, EC, EM & ECD.)	
Daylight Circuit	_DC
Emergency Circuit	_EC
Emergency Battery Pack [†]	_EM
Emergency Control Device [†]	_ECD
[†] (Consult factory)	
IP65 Rated (individual units only)	IP65
NSF Listed	NSF
Finish	
(See finishes page for The Naturals options)	
Matte White Housing	WH
Luminaire Length	
Specify luminaire/row length in 1' increments (2' minimum length.)	X'
Pattern Options	
(3' minimum length)	
'L' pattern	A' x B'
'U' pattern	A' x B' x C'
Rectangular pattern	A' x B'R

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3 SDCM or Tunable White (2700K-6500K), CRI>80, >90. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. Die cast aluminum end caps. 2' unit weight: 10 lbs., 3' unit weight: 14 lbs., 4' unit weight: 18 lbs., 5' unit weight: 22 lbs.

Optic

Reflectors fabricated of 22 Ga. steel finished in High Reflectance White powder coat. Extruded acrylic lens .085" thick with satin finish, up to 8' continuous.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Dimming range 100% to 10%. Power factor > .9.

Emergency

Output - 10 watts for 90 minutes. Maximum mounting height: 19.2ft.

Labels

UL and cUL Listed. Suitable for Dry, Damp or Wet Locations, indoor use only. Specify Outdoor rated (OD) for outdoor covered ceiling applications. Outdoor rating not available with Tunable White. IP65 per IEC 60529 ensures that the enclosure is dust-tight and protected against jet streams of water from any direction without any harmful effects.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Canopy and cord white as standard. The Naturals: 100% low VOC vinyl.

Lumen Maintenance

Reported: L70 > 61,000 hours Calculated: L70 at > 480,000 hours
 L90 > 61,000 hours L90 at > 128,000 hours
(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)


Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.


Warranty

LED System rated for operation in ambient environments up to 25°C. 5-year limited warranty. Fixture with Outdoor rated (OD) option must be installed in a covered ceiling and is warranted for operation in ambient environments between -20°C to +40°C.

DIRECT ASYMMETRIC Standard Application Example

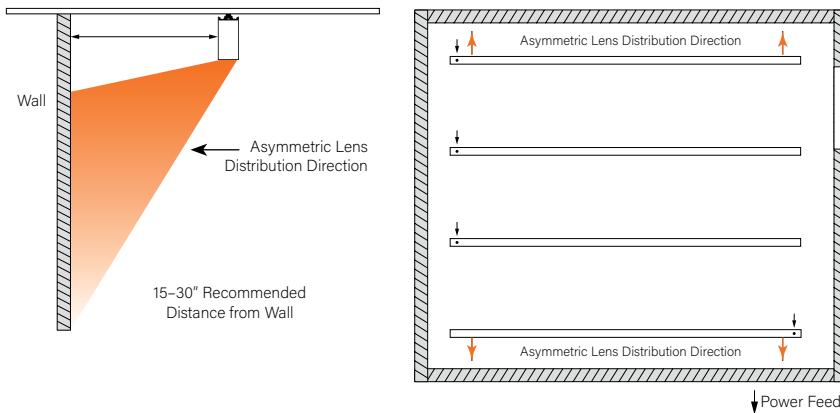

DIRECT ASYMMETRIC ROOM FILL Standard Application Example

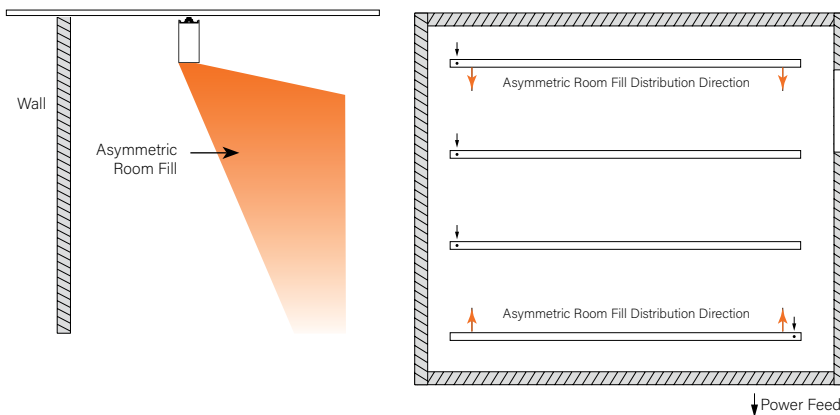

Finishes



STANDARD FINISHES



WHITE WH BLACK BK TITANIUM SILVER TS

THE NATURALS (25% SCALE)



LIGHT OAK LOK GRAY ELM GRE CHESTNUT CHT WALNUT WLT WOVEN LINEN WLN