



Seem® 4 Drywall/Hard/Specialty Ceiling

LED

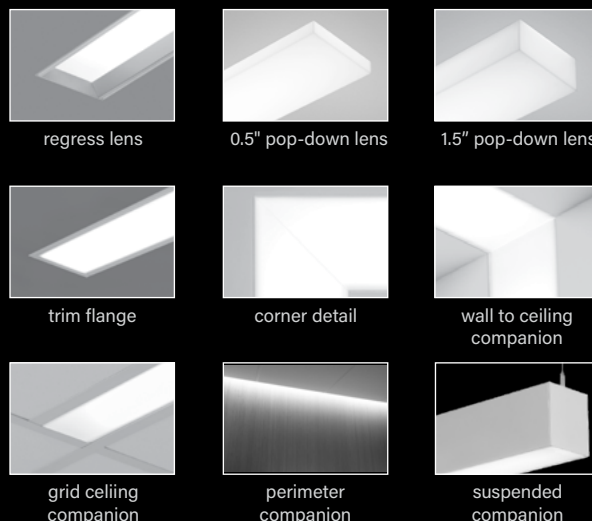


DIMENSIONAL DATA

Asymmetric, Batwing, Flush Lens Trimless mud-in




note: 0.375"min - 2.125"max ceiling thickness

Hard surface




note: 0.375"min - 2.125"max ceiling thickness

Trim flange



No Flange




Specialty ceiling examples




Additional Shielding Options


Regress lens



1.5" Pop-Down lens



0.5" Pop-Down lens



FEATURES

Extruded aluminum 4" aperture recessed slot LED integrates with drywall or hard ceilings or walls in a variety of mounting styles for a clean, unobtrusive aesthetic.

Individual units and continuous runs in 1" increments.


Available in flush, asymmetric, asymmetric room fill, batwing, regress, 0.5" or 1.5" pop-down lens.

Tunable White: Supports human activity, well-being, and preferences with a light quality that evolves throughout the day.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

DISTRIBUTIONS

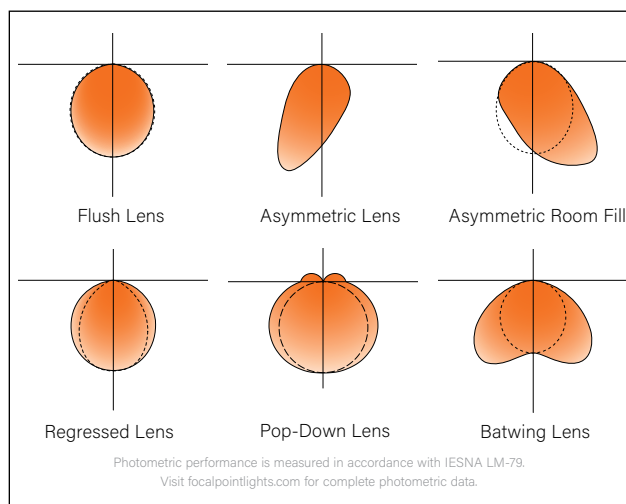


Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

fixture:

project:

DETAILS

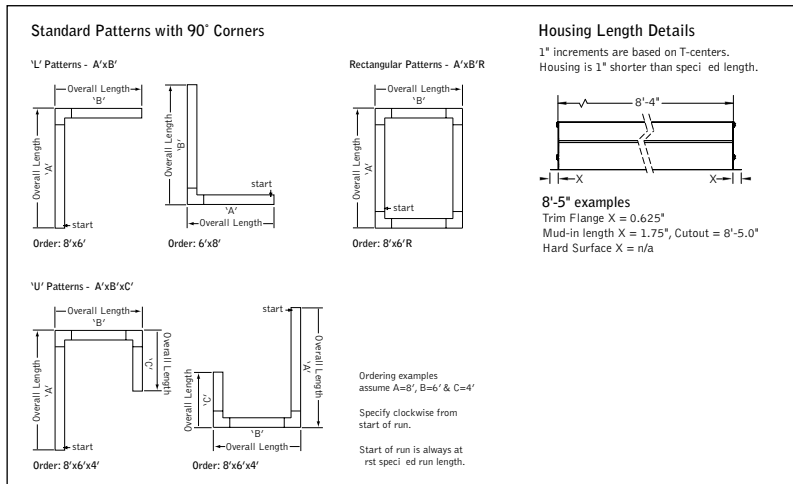

TW 4' PERFORMANCE CHART

Lumen Output	Nominal Lumens	LPW							
		BW		FL		AS		AF	
		Tested System Watts		Tested System Watts		Tested System Watts		Tested System Watts	
275LF	1100	10.8	101	11.2	98	10.7	102	10.9	101
375LF	1500	14.4	104	14.8	101	13.9	108	14.1	106
625LF	2500	23.8	105	24.5	102	23.6	106	23.9	105
750LF	3000	28.7	105	30.7	98	27.5	109	27.8	108
875LF	3500	35.2	100	36.2	97	33.6	104	34.0	103
1000LF	4000	40.5	99	41.5	96	38.8	103	39.4	102
1125LF	4500	46.0	98	47.2	95	44.1	102	44.7	101

Based on 2700K, 90CRI, 4' lengths. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

TW 4' PERFORMANCE CHART - REGRESS

Lumen Output	Nominal Lumens	LPW			
		SR		SRXP	
		Tested System Watts		Tested System Watts	
275LF	1100	11.5	96	10.8	102
375LF	1500	15.7	95	14.3	105
625LF	2500	26.2	96	23.5	106
750LF	3000	32.8	91	29.4	102
875LF	3500	38.9	90	34.6	101
1000LF	4000	44.4	90	39.5	101

Based on 2700K, 90CRI, Based on 2700K, 80CRI, 4' lengths. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

TW

Lumen Output	Nominal Lumens	0.5"		1.5"	
		Tested System Watts	LPW	Tested System Watts	LPW
275LF	1100	13.1	84	14.1	78
375LF	1500	18.3	82	19.6	76
625LF	2500	31.7	79	34.3	73
750LF	3000	38.8	77	41.9	72

Based on 2700K, 90CRI, 4' lengths. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Lumen Multipliers

CRI	Multiplier
80+	1.16
90+	1.00

Wattage Multipliers

CCT	Multiplier
2700K	1.00
3000K	0.96
3500K	0.92
4000K	0.89
5000K	0.88
5700K	0.87



TUNABLE WHITE

Luminaire Series

Seem 4 LED FSM4L

Shielding

Asymmetric Lens AS

Asymmetric Room Fill AF

Batwing Lens BW

Flush Satin Lens FL

0.5" Pop-Down Lens (750LF max.) PD05

1.5" Pop-Down Lens (750LF max. individual units only) PD15

Regress Lens* SR

Regress High Performance Lens* SRXP

*(1000LF max. Ceiling applications only)

Lumen Output

275 Lumens per foot (BW, FL, SR & SRXP 3' min. with D1TW) 275LF

375 Lumens per foot (BW, FL, SR & SRXP 3' min.) 375LF

625 Lumens per foot 625LF

750 Lumens per foot 750LF

875 Lumens per foot 875LF

1000 Lumens per foot 1000LF

1125 Lumens per foot 1125LF

Color Temperature

Tunable White: 2700-6500K, 80+ CRI 2765T

Tunable White: 2700-6500K, 90+ CRI 92765T

Circuits & Zones

1 Circuit, non-emergency 1C

Consult Ordering Guide on page 6 for multiple circuiting and zoning options

Voltage

120/277 UNV Volt UNV

Control System & Dimming Level

DALI 1% Dimming D1TW

(Default driver offers DT6 control. It requires two addresses, one for intensity & one for CCT tuning. Consult factory for DT8. Extended lead time applies.)

Ceiling Configuration

No Flange for specialty ceilings (Ex. slat, panel, cloud systems.) NF

Trim Flange Drywall TF

Trim Flange Wood TFW

Mud-in Trimless, pre-set for 1/2" Drywall XF1

Mud-in Trimless, pre-set for 5/8" Drywall XF2

Mud-in Trimless, set thickness in field (Mounting equipment assembled in field) XFF

Non-Drywall Hard Surface XFN

Hard Surface, Wood XFW

Factory Options

(See page 6 for ordering details for DC, EC, EM & ECD.)

Chicago Plenum CP

(Not available with Flex Whip)

Daylight Circuit _DC

Emergency Circuit _EC

Emergency Battery Pack† _EM

Emergency Control Device† _ECD

†(Consult factory.)

6' New York City Flex Whip 120V or 277V FNY1 or FNY2

6' Flex Whip FW

Finish

Matte White Housing WH

Luminaire Length

Specify luminaire/row length in 1" increments _ft_in

(2" minimum. Housing length is 1" shorter than specified. Leave blank for patterns.)

Pattern Options

(4' min. length. Not available with Pop-Down Lenses. Consult factory for other pattern options.)

'L' pattern A' x B'

'U' pattern A' x B' x C'

Rectangular pattern A' x B' R

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3 SDCM or Tunable White (2700K-6500K), CRI>80, >90. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. LED modules and drivers are replaceable from below.

Construction

One piece extruded aluminum housing. 20 Ga. steel end caps. Housing for new construction applications. XFW acceptable for use with wood, consult factory for Type IC availability. 2' unit weight: 12 lbs., 3' unit weight: 16 lbs., 4' unit weight: 20 lbs., 5' unit weight: 24 lbs.

Optic

Asymmetric, Flush and Batwing lens extruded acrylic .085" thick with satin finish up to 8' continuous. Pop-Down lens extruded acrylic .06" thick with frosted finish, up to 8' continuous. Regress lens .118" thick acrylic lay-in lens. 22 Ga. reflector finished in High Reflectance White powder coat.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor >.9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires. PoE runs require an independent PoE node and power feed for each luminaire section.

Emergency

Output - 10 watts for 90 minutes. Maximum mounting height: 19.2ft. Emergency Circuit with Connected Solutions (WSPS, WLXP) shipped standard with leads to connect UL924 compliant device, by others.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 > 61,000 hours	Calculated: L70 at > 480,000 hours
L90 > 61,000 hours	L90 at > 128,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

Declare.

Seem Linear Luminaires Focal Point, LLC

Final Assembly: Chicago, IL, USA
Life Expectancy: 10 Year(s)
End of Life Options: Recyclable (55%), Landfill (45%)

Ingredients:

Aluminum Alloy 6063; UNS G10080 Steel Alloy; Small Electrical Components - RoHS Compliant¹; Copper; Polymethyl methacrylate; Steel; Poly(imino(1,6-dioxo-1,6-hexanediyl)imino-1,6-hexanediyl); **Polyvinyl chloride**; Aluminum Alloy 6061; UNS S30400 Stainless Steel Alloy; Steel manufacture, chemicals; 2-Propenoic acid, 2-methyl-, methyl ester, polymer with ethyl 2-propenoate; Nylon 6; **Benzene, ethenyl-, homopolymer, brominated**; **Bis(pentabromophenyl) ether (decabromodiphenyl ether) (DecaBDE)**; Tris(2-ethylhexyl) trimellitate; Zinc; Methyl methacrylate; Antimony oxide (Antimony trioxide); Kaolin, calcined; Octadecanoic acid, calcium salt; Steel, carbon

¹LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:

I-13 Red List:


☐ LBC Red List Free	% Disclosed: 100% at 100ppm
☐ LBC Red List Approved	VOC Content: Not Applicable
☒ Declared	

I-10 Interior Performance: Not Applicable
I-14 Responsible Sourcing: Not Applicable


FPL-0003
EXP. 01 FEB 2027
Original Issue Date: 2024

INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare


ADDITIONAL DIMENSIONAL DATA

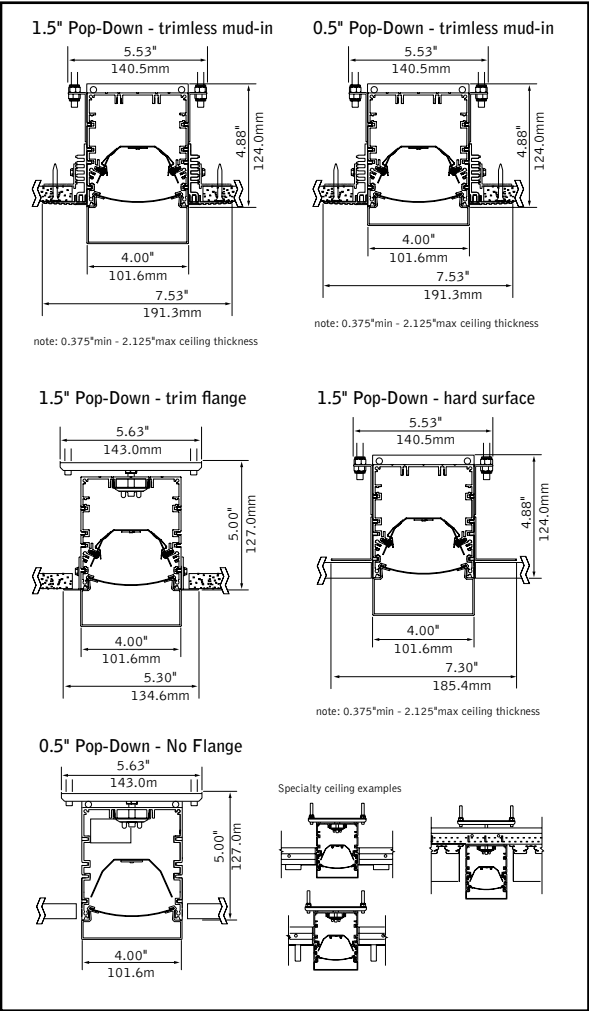

DIRECT ASYMMETRIC
Standard Application Example

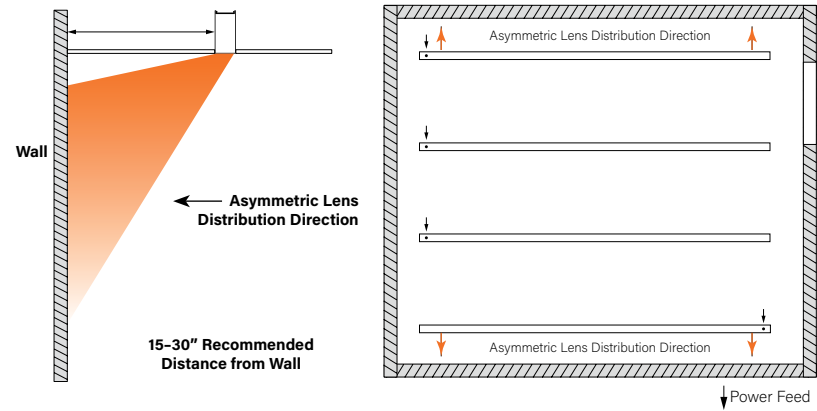

DIRECT ASYMMETRIC ROOM FILL
Standard Application Example

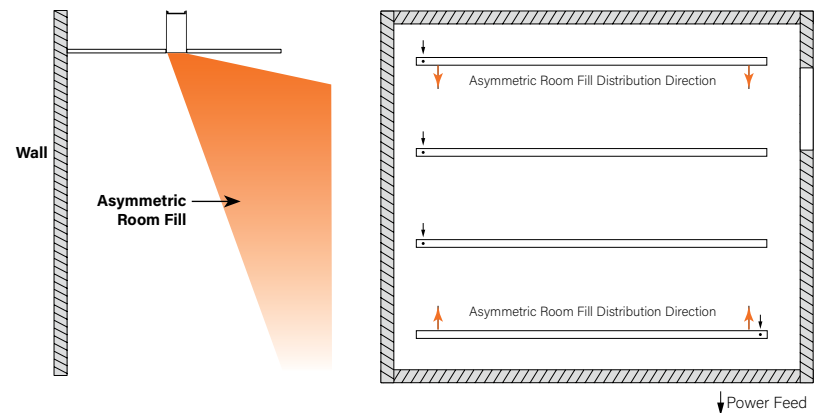

Focal Point provides broad flexibility through compatibility with a wide range of indoor lighting control systems. A variety of sensors, nodes, controllers, and drivers can be specified to scale the system and meet the needs of each application across both wired and wireless networks.

Features such as daylight harvesting, occupancy sensing, dimming, and switching help save energy, reduce costs, and enhance occupant comfort. All Connected Solutions luminaires require a compatible building control system.

Controls systems supplied by others. For performance data and additional control system details, please visit the connected solutions manufacturers websites.

Connected Solution	Ordering Code	Model #	Protocol	Compatible Networks (Not all compatible networks may be listed.)	Description	Occupancy & Daylight	Communication to Luminaire	Drivers (Primary drivers are listed in bold . To specify a particular driver please consult factory.)	Driver Type
 WATTSTOPPER®									
	WSPS	EN-CLM-PIR-DD-ZB	ZigBee	Wattstopper PLUS	Sensor	Integrated*	Wireless	Advance by Signify	0-10V standard, consult factory for DALI
 COOPER Lighting Solutions									
	WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Sensor	Integrated*	Wireless (WaveLinx Pro Wireless Area Controller)	Advance by Signify	0-10V
 LUTRON									
	LAWS	A-WN-D01-OCC-WH	Clear Connect	Athena Wireless	Sensor	Integrated*	Wireless	Advance by Signify	0-10V standard, consult factory for DALI

*Integrated: Luminaire supplied with an installed sensor.

Ordering Guide

Direct Only Linear Circuitry, Zones & Factory Options



HOW TO USE THIS GUIDE

Fill out the worksheet on the following page to specify your requirements for circuitry, zones, and factory options.


Refer to the run chart for standard run configurations, consult factory for custom configurations.

Complete the Totals / Ordering Codes at the bottom of the worksheet and add to your ordering logic on the cut sheet.

Submit the worksheet along with your order.

EXAMPLE	TOTAL RUN LENGTH: 32ft		JOB NAME:			FIXTURE TYPE:			
	HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
						SEPARATE ELECTRICAL FEEDS			EM
			SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	ECD	
	1	8	1C	1Z					1EM
	2	8	2C	2Z					
	3	8	2C	2Z					
	4	8				1DC			
	Totals / Ordering Codes		2C	2Z		1DC			1EM

ORDERING: FSM4L-FL-625LF-35K- 2C2Z -UNV-LD1-G2- 1DC-1EM -WH-32ft

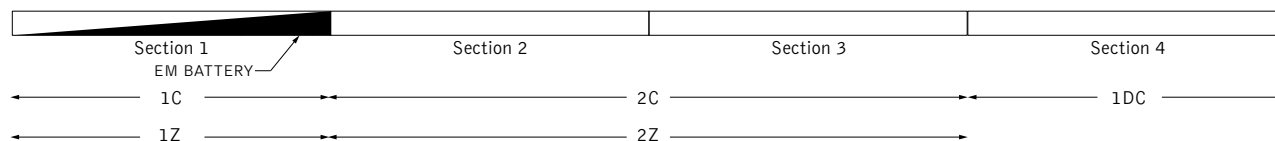

KEY

C = Switching Circuit
Switched Hot / Shared Neutral

Z = Dimming Zone
Dimming Control Wires

DL = Daylight Zone
Daylight Dimming Control Wires

DC = Daylight Circuit
Switched Hot / Separate Neutral

EC = Emergency Circuit
Switched Hot / Separate Neutral

EM = Emergency Battery
Unswitched Hot / Shared Neutral

ECD = Emergency Control Device
Unswitched Hot / Separate Neutral

DEFAULTS

- Zones and Factory Options illuminate entire sections from 4' to 8' in length.
- One shared or isolated circuit and zone required per housing section.
- Limit of one EM or ECD per housing section.
- Additional electrical feed required for applications greater than three shared circuits and zones.
- Each DC, EC and ECD require an additional electrical feed.
- ECD not available in the same housing section as EC.
- Longer lead times and additional pricing may apply for custom run configurations.

CUSTOM LENGTHS

- If partial illumination of emergency or daylight section is required, indicate in ordering guide and add "partial illumination" in Order Notes. Drawing required.
- Engineering validation required, longer lead times may apply.

Ordering Guide Worksheet

Linear Circuitry, Zones & Factory Options



TOTAL RUN LENGTH: _____		JOB NAME: _____			FIXTURE TYPE: _____			
HOUSING SECTION	SECTION LENGTH	SHARED ELECTRICAL FEED, NORMAL POWER			FACTORY OPTIONS			
		SWITCHING CIRCUIT	DIMMING ZONE	DAYLIGHT ZONE	SEPARATE ELECTRICAL FEEDS			EM
						DAYLIGHT CIRCUIT	EMERGENCY CIRCUIT	
1								
2								
3								
4								
5								
6								
7								
8								
9								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
Totals / Ordering Codes								

Combine to create Circuits & Zones ordering code

Enter as individual Factory Options

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths	Run length (ft)	Housing Configuration Section Lengths
9	5 + 4	21	8 + 8 + 5	33	8 + 8 + 8 + 5 + 4	45	8 + 8 + 8 + 8 + 8 + 5
10	6 + 4	22	8 + 8 + 6	34	8 + 8 + 8 + 6 + 4	46	8 + 8 + 8 + 8 + 8 + 6
11	7 + 4	23	8 + 8 + 7	35	8 + 8 + 8 + 7 + 4	47	8 + 8 + 8 + 8 + 8 + 7
12	8 + 4	24	8 + 8 + 8	36	8 + 8 + 8 + 8 + 4	48	8 + 8 + 8 + 8 + 8 + 8
13	8 + 5	25	8 + 8 + 5 + 4	37	8 + 8 + 8 + 8 + 5		
14	8 + 6	26	8 + 8 + 6 + 4	38	8 + 8 + 8 + 8 + 6		
15	8 + 7	27	8 + 8 + 7 + 4	39	8 + 8 + 8 + 8 + 7		
16	8 + 8	28	8 + 8 + 8 + 4	40	8 + 8 + 8 + 8 + 8		
17	8 + 5 + 4	29	8 + 8 + 8 + 5	41	8 + 8 + 8 + 8 + 5 + 4		
18	8 + 6 + 4	30	8 + 8 + 8 + 6	42	8 + 8 + 8 + 8 + 6 + 4		
19	8 + 7 + 4	31	8 + 8 + 8 + 7	43	8 + 8 + 8 + 8 + 7 + 4		
20	8 + 8 + 4	32	8 + 8 + 8 + 8	44	8 + 8 + 8 + 8 + 8 + 4		

Standard run configurations, consult factory for custom configurations.