


# Seem Sweep® 2 Straights

LED DIRECT/INDIRECT



Rounded End Cap detail




Pattern companion



Arc companion


## DIMENSIONAL DATA

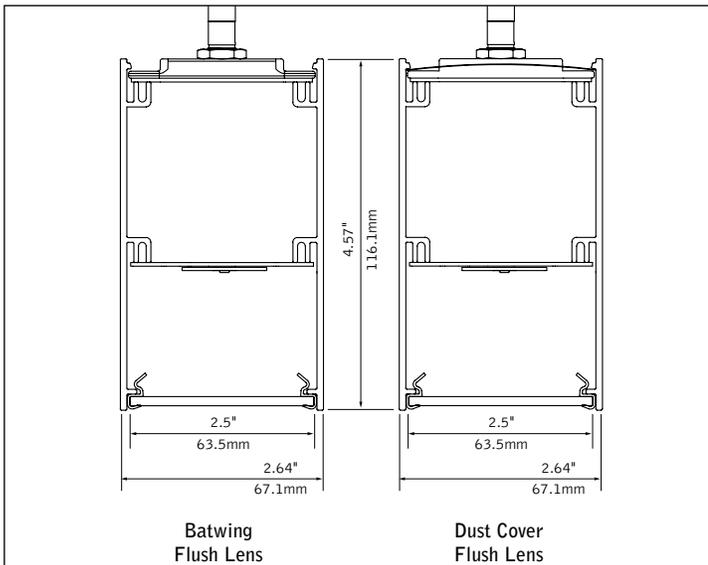

## FEATURES


- Narrow 2.5" aperture suspended direct/indirect LED with rounded end caps.
- Frosted acrylic lens provides uninterrupted illumination, without pixels or shadows.
- Lambertian direct and indirect or batwing indirect illumination.
- PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.
- Cohesive aesthetic when paired with other Seem Sweep 2 luminaires within a space.

## MOUNTING INFORMATION

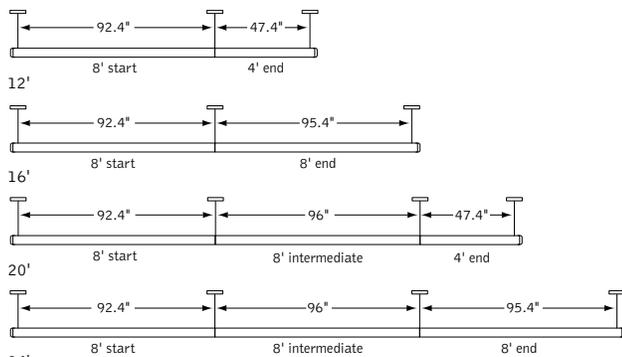

Consult factory for additional row length information.

## DISTRIBUTIONS

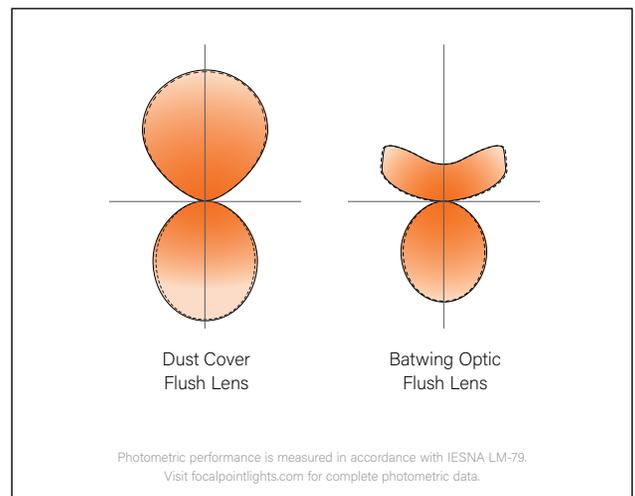



4' PERFORMANCE CHART

Direct Distribution	Indirect Distribution	Distribution % (Direct/Indirect)	 DC/FL			 BW/FL		
			Total Delivered Lumens	Tested System Watts	LPW	Total Delivered Lumens	Tested System Watts	LPW
250	250	50/50	2000	12.7	158	2000	12.7	157
	375	40/60	2504	16.3	153	2507	16.5	152
	500	33/67	3007	19.5	154	3005	19.6	154
	625	29/71	3501	22.6	155	3502	22.8	153
	750	25/75	4003	26.0	154	4007	26.2	153
	875	22/78	4503	29.4	153	4503	29.7	152
	1000	20/80	5003	34.3	146	5005	34.6	145
	1125	18/82	5507	38.1	144	5504	38.4	143
	1250	17/83	6003	40.0	150	6002	40.4	149
375	250	60/40	2505	17.5	143	2505	17.6	143
	375	50/50	3009	21.2	142	3012	21.3	141
	500	43/57	3512	24.3	144	3510	24.4	144
	625	38/62	4006	27.5	146	4007	27.6	145
	750	33/67	4508	30.8	146	4512	31.0	145
	875	30/70	5008	34.2	146	5008	34.5	145
	1000	27/73	5508	39.1	141	5510	39.4	140
	1125	25/75	6012	43.0	140	6009	43.3	139
	1250	23/77	6508	44.8	145	6507	45.2	144
500	250	67/33	3006	21.8	138	3006	21.9	137
	375	57/43	3510	25.5	138	3513	25.6	137
	500	50/50	4013	28.6	140	4011	28.7	140
	625	44/56	4507	31.8	142	4508	31.9	141
	750	40/60	5009	35.1	143	5013	35.3	142
	875	36/64	5509	38.5	143	5509	38.8	142
	1000	33/67	6009	43.5	138	6011	43.7	137
	1125	31/69	6513	47.3	138	6510	47.6	137
	1250	29/71	7009	49.1	143	7008	49.5	142
625	250	71/29	3504	26.3	133	3504	26.4	133
	375	63/37	4008	30.0	134	4011	30.1	133
	500	56/44	4511	33.1	136	4509	33.2	136
	625	50/50	5005	36.3	138	5006	36.4	137
	750	45/55	5507	39.6	139	5511	39.8	138
	875	42/58	6007	43.0	140	6007	43.3	139
	1000	38/62	6507	48.0	136	6509	48.2	135
	1125	36/64	7011	51.8	135	7008	52.1	135
	1250	33/67	7507	53.6	140	7506	54.0	139
750	250	75/25	4005	26.3	152	4005	26.4	152
	375	67/33	4509	30.0	150	4512	30.1	150
	500	60/40	5012	33.1	151	5010	33.2	151
	625	55/45	5506	36.3	152	5507	36.4	151
	750	50/50	6008	39.6	152	6012	39.8	151
	875	46/54	6508	43.0	151	6508	43.3	150
	1000	43/57	7008	48.0	146	7010	48.2	145
	1125	40/60	7512	51.8	145	7509	52.1	144
	1250	38/62	8008	53.6	149	8007	54.0	148
875	250	78/22	4500	37.4	120	4500	37.5	120
	375	70/30	5004	41.1	122	5007	41.2	122
	500	64/36	5507	44.2	125	5505	44.3	124
	625	58/42	6001	47.4	127	6002	47.6	126
	750	54/46	6503	50.7	128	6507	50.9	128
	875	50/50	7003	54.1	129	7003	54.4	129
	1000	47/53	7503	59.1	127	7505	59.3	126
	1125	44/56	8007	62.9	127	8004	63.2	127
	1250	41/59	8503	64.8	131	8502	65.1	131
1000	250	80/20	5001	40.5	123	5001	40.6	123
	375	73/27	5505	44.2	125	5508	44.3	124
	500	67/33	6008	47.3	127	6006	47.4	127
	625	62/38	6502	50.5	129	6503	50.7	128
	750	57/43	7004	53.9	130	7008	54.0	130
	875	53/47	7504	57.2	131	7504	57.5	130
	1000	50/50	8004	62.2	129	8006	62.4	128
	1125	47/53	8508	66.0	129	8505	66.3	128
	1250	44/56	9004	67.9	133	9003	68.2	132

Based on 3500K, 4' lengths. Delivered lumens may vary +/- 5%. Actual wattage may vary +/- 5%.