


perforated



slotted




solid




suspended
companion


DIMENSIONAL DATA

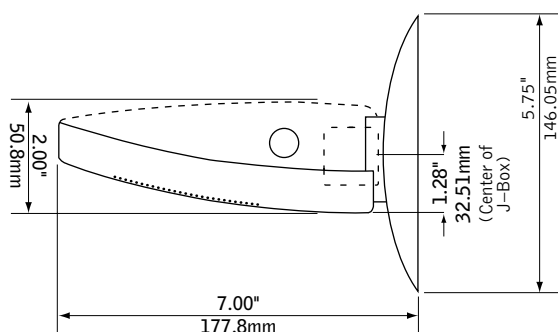

lampping options




T5/T5HO LAMPS




T8 LAMP

fixture information



4' (4' 10")



8' (8' 10")

FEATURES


Wall mounted indirect asymmetric fluorescent with contoured housing and end caps.

Elegant wall-mount version of Focal Point's suspended Verve™ II.

One-piece steel housing with 5" die-cast end caps.

Verve™ is an excellent choice for any open or private office.

PERFORMANCE



Perforated Housing
1-Lamp T5HO

79.4% Efficient

2259 cd @ 135°

PRODUCT OVERVIEW

Lumen Output: 2521-5784lm

Wattage: 33-120W


Lamping: T5, T5HO, T8

Visit focalpointlights.com for complete photometric data.

fixture:

project:

MOUNTING INFORMATION

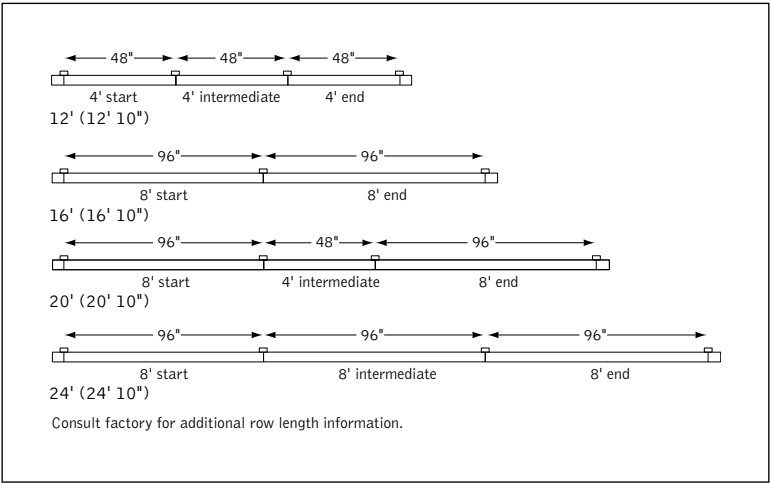

SPECIFICATIONS

Construction

One-piece 20 Ga. steel housing available solid or with perforated or slotted pattern. Perforated or slotted housing includes white acrylic insert. Die-cast 5" end cap fastened to housing. For row installation, internal brackets form hairline joint. Standard lengths are available in 4' and 8'. All luminaires are provided with mounting brackets. 4' unit weight: 15 lbs., 8' unit weight: 22 lbs.

Optic

Die-formed 24 Ga. steel reflector, finished in high reflectance white powder coat (93% min. reflectance).

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available.

Labels

UL and cUL listed.

Finish

Polyester powder coat applied over a 5-stage pretreatment. Mounting arm and brackets finished to match housing.

ORDERING

Fixture Series		FV2W
Verve II	FV2W	
Shielding		
Perforated Housing	PS	
Slotted Housing	SL	
Solid Housing	SD	
Lamping		
1 Lamp T5	1T5	
1 Lamp T5HO	1T5HO	
2 Lamp T5	2T5	
2 Lamp T5HO	2T5HO	
1 Lamp T8	1T8	
Circuit		
Single Circuit	1C	
Dual Circuit	2C	
(Multiple lamp luminaires only)		
Voltage		
120 Volt	120	
277 Volt	277	
347 Volt	347	
(Consult factory for dimming options)		
Ballast		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
Mounting		WM
Wall Mount	WM	
Factory Options		
Dust Cover	DC	
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
HLR/GLR Fuse	FU	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
(Sensor options available—consult factory)		
Finish		
Matte White Housing	WH	
Titanium Silver	TS	
Luminaire Length		
4'	4'	
8'	8'	
12'	12'	
16' (8'+8')	16'	
20' (12'+8')	20'	
24' (12'+12')	24'	

Verve™ II


FLUORESCENT

FV2W-PS-1T5HO-1C-120-S-WM-WH-4'

Filename: FV2WPS1T5H.IES
Test #: 10921.0

Lumens: 3968lm
Efficiency: 79.4%

CANDELPower DISTRIBUTION

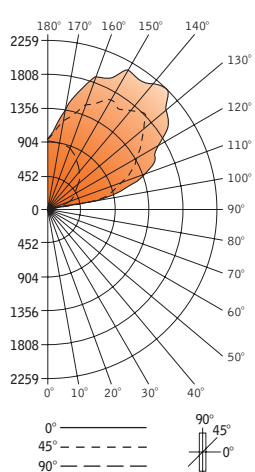

Vertical Angle	Horizontal Angle					Zonal Lumens
	0°	22.5°	45°	67.5°	90°	
0°	32	32	32	32	32	
5°	34	34	34	34	32	3
15°	38	38	36	32	30	9
25°	34	37	34	31	25	13
35°	32	32	29	25	20	14
45°	23	23	19	16	7	9
55°	18	18	12	7	5	6
65°	12	10	6	1	0	3
75°	5	5	1	0	0	1
85°	2	1	0	0	0	0
90°	98	71	33	1	0	
95°	336	317	275	212	34	153
105°	974	947	885	588	150	421
115°	1609	1505	1281	920	305	624
125°	1914	1823	1609	1123	462	690
135°	2259	2136	1850	1283	625	708
145°	2055	1941	1639	1172	715	552
155°	1907	1814	1556	1168	833	420
165°	1508	1446	1293	1087	896	257
175°	1109	1083	1032	958	917	86
180°	909	909	909	909		

LUMEN SUMMARY

	Zone	Lumens	% Lamp	% Fixture
Total Luminaire	90°-120°	25	.5	.6
	90°-130°	58	1.2	1.5
	90°-150°	1887	37.7	47.6
	90°-180°	3910	78.2	98.5
	0°-180°	3968	79.4	100.0

Go to www.focalpointlights.com for additional photometric data.