




flat diffuser




radial diffuser



suspended or  
surface mount




linear companion



wall mount  
companion

## DIMENSIONAL DATA

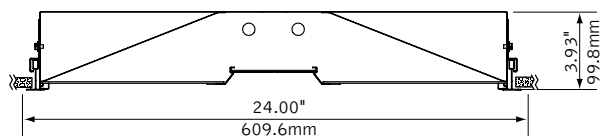


Overall height for luminaire with Air Return is 4.58"

### shielding options



REGRESS



FLAT





RADIAL


### lamping



T5/T5HO LAMPS



T8 LAMPS




## FEATURES

High efficiency architectural recessed fluorescent luminaire.

Three distinctive aesthetics offer contemporary styling, and complement architecture.

MicroGroove™ diffusers add texture and visual interest with a ribbed pattern that minimizes lamp image.

## PERFORMANCE



Regress Acrylic Diffuser  
2-lamp T5

**84.9% Efficient**

**774 cd @ 5°**

### PRODUCT OVERVIEW

Lumen Output: 1018-3396lm

Wattage: 16-51W



Lamping: T5, T5HO, T8

Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.

SUSPENSION INFORMATION

**grid**

specify "G" for flat 9/16" and 15/16" tee or "ST" for 9/16" slot tee grid types.





"G" flat tee  
Luminaires may be installed in T-bar ceiling systems up to 1 11/16" high\*.

"ST" slot tee

**drywall frame kit**

specify "DF" Drywall Frame Kit for drywall ceiling conditions.



Use tie-wire or screws to secure frame kit.

cut out dimensions:  
2': Min: 24.25"  
Max: 24.563"

SPECIFICATIONS

- Construction**

One piece 20 Ga. steel reflector and housing. 20 Ga. steel ends. Positional brackets supplied as standard. Weight: 17 lbs.
- Optic**

20 Ga. steel reflectors finished in matte satin white powder coat. .095" thick frosted white acrylic diffusers with linear MicroGroove™ pattern.
- Electrical**

Electronic ballasts are thermally protected and have a Class "P" rating. Optional dimming ballasts available. Consult factory for dimming specifications and availability.
- Labels**

UL and cUL listed.
- Finish**

Polyester powder coat applied over a 5-stage pre-treatment. Optional Matte Satin White with anti-microbial coating provides 99.99% protection against a broad spectrum of micro-organisms.

ORDERING

Luminaire Series	FVR	FVR
Veer	FVR	
Nominal Size	22	22
2' x 2'	22	
Shielding		
Radial Acrylic Diffuser	ACR	
Flat Acrylic Diffuser	ACF	
Regress Acrylic Diffuser	ACG	
Lamp Quantity		
One Lamp	1	
Two Lamp	2	
Three Lamp	3	
(T5/T5HO & T8 only)		
Lamp Type		
T5	T5	
T5HO	T5HO	
T8	T8	
Circuit		
Single Circuit	1C	
Dual Circuit	2C	
Voltage		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
(Cannot be specified with 1-lamp T5HO dimming or EM option)		
Ballast		
Electronic Program Start <10% THD	S	
0-10V	D7	
Lutron 1% 3-wire	DH	
Lutron 1% H-Series	DK	
Mounting		
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
Drywall Frame Kit	DF	
(Cut out dimensions: Min: 24.25"/Max: 24.563")		
Grid	G	
Slot Tee	ST	
Surface Mount	SM	
Factory Options		
Air Return	AR	
(Overall height with Air Return is 4.58")		
Chicago Plenum	CP	
Emergency Battery Pack*	EM	
HLR/GLR Fuse	FU	
6' New York City Flex Whip	FNY	
6' Flex Whip	FW	
Include 3000K Lamp*	L830	
Include 3500K Lamp*	L835	
Include 4100K Lamp*	L841	
Finish		
Matte Satin White	WH	
Matte Satin White	WHA	
with Anti-Microbial Coating		