


# Zephyr® 2x2


LED



detail

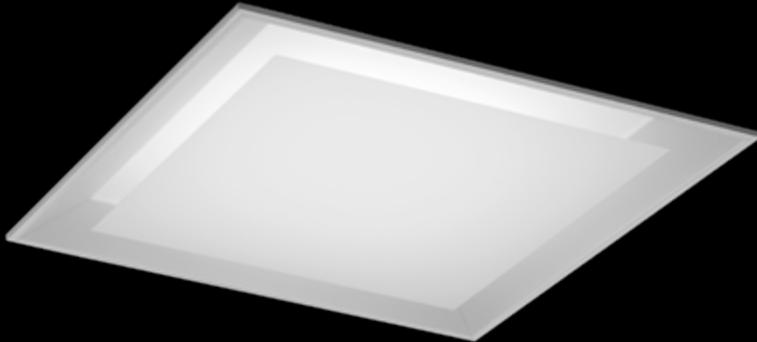

## DIMENSIONAL DATA

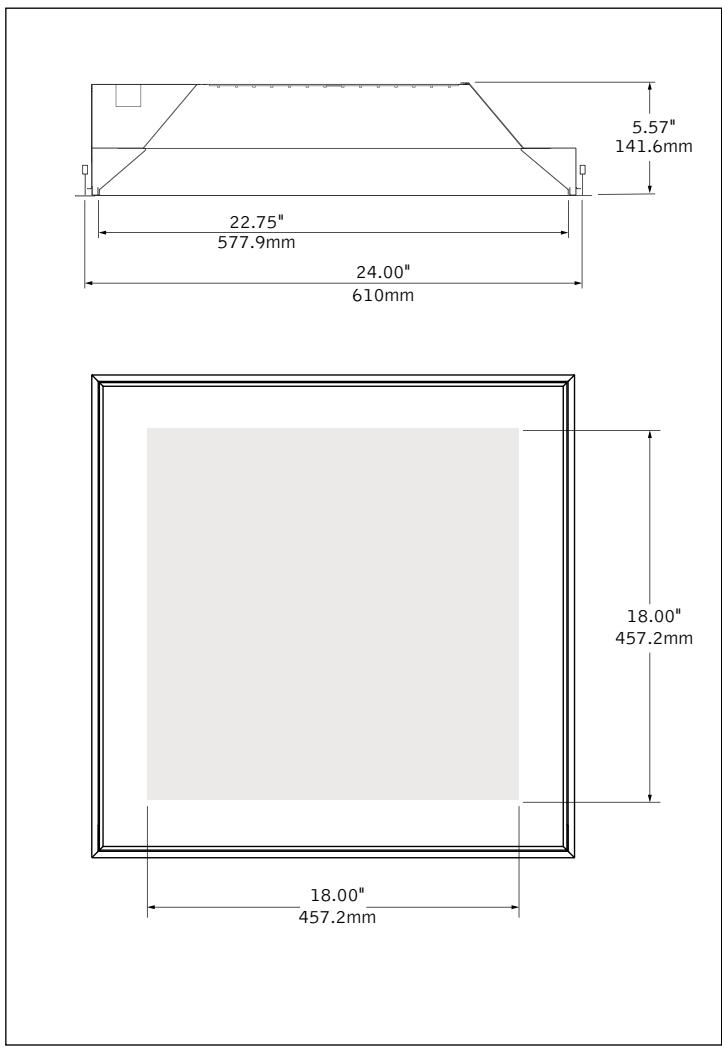

## FEATURES

Architectural recessed 2'x2' with unique floating diffuser.

Lens element features an optical microstructure providing glare control and high levels of efficiency.

Zephyr features a one-piece, hinged bezel assembly that is easily removed for ease of maintenance.


Standard Right Light levels from 1,000 to 5,500 lumens.


Dimming options include DALI, 0-10V and Lutron EcoSystem.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

## PERFORMANCE

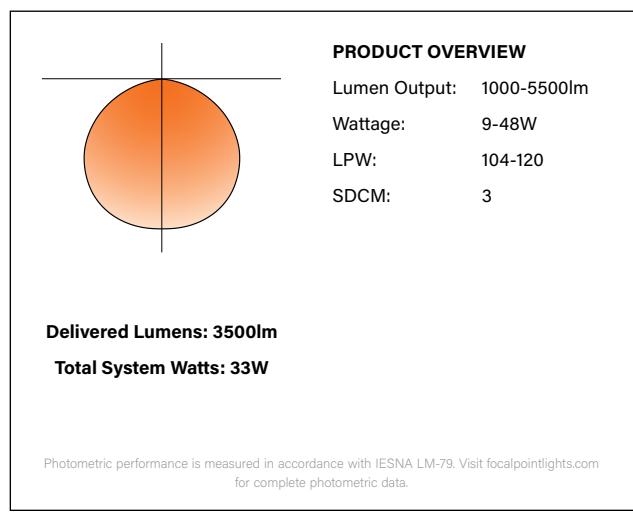

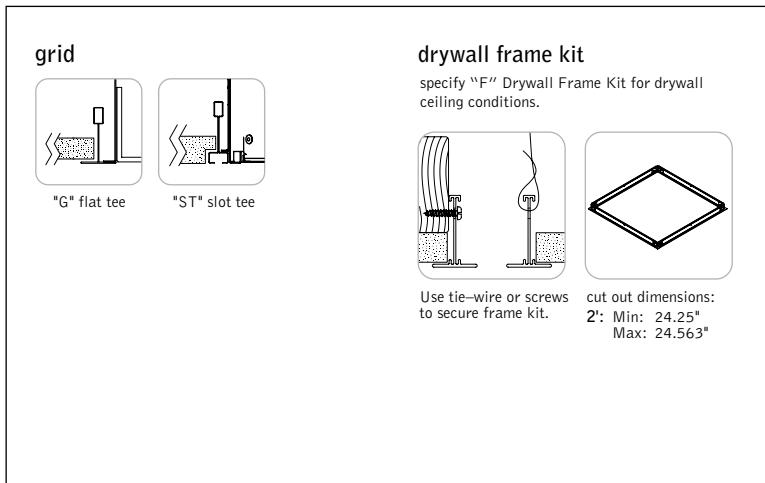**DETAILS****SPECIFICATIONS****LED System**

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. 0-10V dimming driver standard. LED modules and drivers are replaceable from below. Color accuracy <3 SDCM.

**Construction**

24 Ga. steel housing. Bottom access 24 Ga. steel driver compartment. Positional brackets supplied as standard. Weight: 14.5 lbs.

**Optic**

24 Ga. Steel reflectors finished in matte satin white powder coat. Layered lens system includes .020" thick frosted acrylic and .080" clear acrylic with optical microstructure.

**Electrical**

Standard 120-277V driver includes 0-10V analog dimming, 100% - 10% range. Power factor > .9. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

**Emergency**

Emergency battery output—10 watts for 90 minutes. Maximum mounting height: 23.9ft. Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFSD, NLT1, CLM1, NXE1, WLXP) requires a UL924 compliant device, consult factory. Top access only.

**Labels**

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

**Finish**

Polyester powder coat applied over a 5-stage pre-treatment.

**Lumen Maintenance**

Reported: L70 at 42,000 hours      Calculated: L70 at 115,000 hours  
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

**Reliability**

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

**Lifetime and warranty**

LED system rated for operation in ambient environments up to 35°C. 5-year limited warranty.

**PERFORMANCE CHART**

Delivered Lumens	Tested System Watts	LPW	Delivered Lumens	Tested System Watts	LPW
1000	9	111	4000	39	104
1500	13	116	4500	38	120
2000	18	113	5000	43	117
2500	23	109	5500	48	115
3000	27	111			
3500	33	107			

Based on 3500K, 80 CRI. Lumen multipliers:  
Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

**ORDERING****Luminaire Series**

Zephyr FZR

22

Shielding

Frosted Lens FL

**Lumen Output**

1000 Lumens 1000L

1500 Lumens 1500L

2000 Lumens 2000L

2500 Lumens 2500L

3000 Lumens 3000L

3500 Lumens 3500L

4000 Lumens 4000L

4500 Lumens 4500L

5000 Lumens 5000L

5500 Lumens 5500L

**Color Temperature**

2700K, 80+ CRI or 90+ CRI 27K or 927K

3000K, 80+ CRI or 90+ CRI 30K or 930K

3500K, 80+ CRI or 90+ CRI 35K or 935K

4000K, 80+ CRI or 90+ CRI 40K or 940K

**Circuits**

Single Circuit 1C

**Voltage**

UNV 120/277 Volt 347 Volt UNV 347

(LD1, CLM1 only, Not available with EM)

Low Voltage LV

**Control System & Dimming Level**

0-10V - 10% Dimming LD1

0-10V - 1% Dimming L11

Low Voltage, PoE compatible LVN

(No driver. Not available with EM or EC. LV Voltage only.)

Lutron Hi-Lume EcoSystem (LDE1) - LH1

1% Dimming D11

DALI - 1% Dimming SD5

Step Dimming (120/277 only) DLM1

Wattstopper DLM - 1% Dimming (Not available with CP) LMFS1

Wattstopper Fixture Sensor Low Density - 1% Dimming (Remote mounted sensor) LMFSD

Wattstopper Fixture Sensor High Density - 1% Dimming (Remote mounted sensor) NLT1

Acuity nLight - 1% Dimming (Not available with CP) CLM1

Encelium CLM Connected Lighting Module - 1% Dimming NLT1

Current NX Enabled - 1% Dimming NXE1

(Not available with CP.) WLXP

**Mounting**

Drywall Frame Kit F

(Not available with CLM1, DLM1, NXE1 or NLT1)

**Grid****Slot Tee**

ST

**Factory Options**

Air Return AR

(Housing height 6.07in/154.2mm. Not compatible with Drywall Frame Kit)

Chicago Plenum CP

(Not available with flex whip)

Emergency Battery EM

(120/277 only. Top access only)

6' New York City Flex Whip (120V) FNY1

6' New York City Flex Whip (277V) FNY2

6' Flex Whip FW

**Finish**

Matte White Housing WH



# Zephyr™ 2x2 LED

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.<sup>†</sup>

Connected Solution	Ordering Code	Model #*	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers	
 <b>WATTSTOPPER®</b>	DLM1	LMFC-011	DLM	DLM	Enabled <sup>1</sup>	No	Wired	<b>Advance by Signify</b> , Optotronic by eldoLED	
	LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Integrated (remote) <sup>3</sup>	No	Wireless		
	LMFSD	LMFS-601							
	WLXP	OEM-WAA	Wavelinx Wireless	WaveLinx Pro Trellix	Integrated (remote) <sup>3</sup>	No	Wireless (WaveLinx Pro Wireless Area Controller)	<b>Advance by Signify</b>	
	D11	Specified Driver	DALI	Crestron Züm Wireless & SpaceBuilder	Enabled <sup>1</sup>	No	Wired	eldoLED ECODrive	
	L11		0-10V					<b>Advance by Signify</b>	
	CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled <sup>1</sup>	No	Wireless	Optotronic by eldoLED Advance by Signify	
	LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled <sup>1</sup>	No	Wired	<b>Lutron Hi-Lume</b>	
	NLT1	nEPS-60-IO	nLight	nLight	Enabled <sup>1</sup>	No	Wired	eldoLED ECODrive, eldoLED SOLOdrive	
	NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled <sup>1</sup>	No	Wired	Optotronic by eldoLED	

\*Not all compatible networks may be listed. \*\*For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.

<sup>†</sup>Controls systems supplied by others. <sup>1</sup>Enabled: Fixture supplied with a Node/ Controller. Sensor to be provided by others. <sup>3</sup>Integrated (remote): Fixture supplied with a Sensor. To be installed in a remote location by others.