


m e t r o



FOCAL POINT®

m

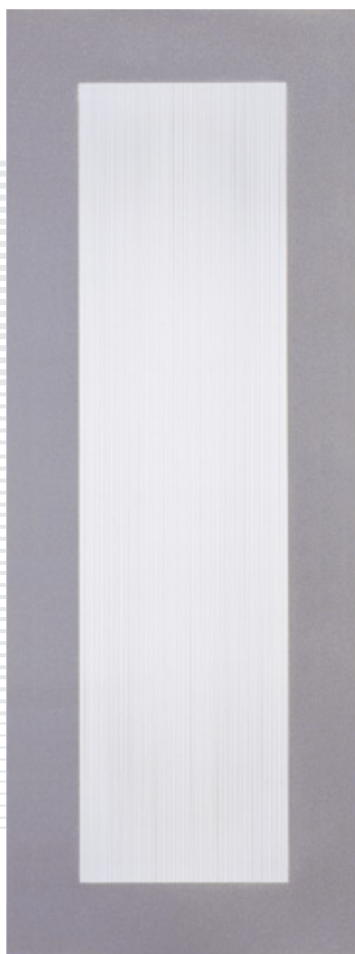


s c o n c e

e



pendant

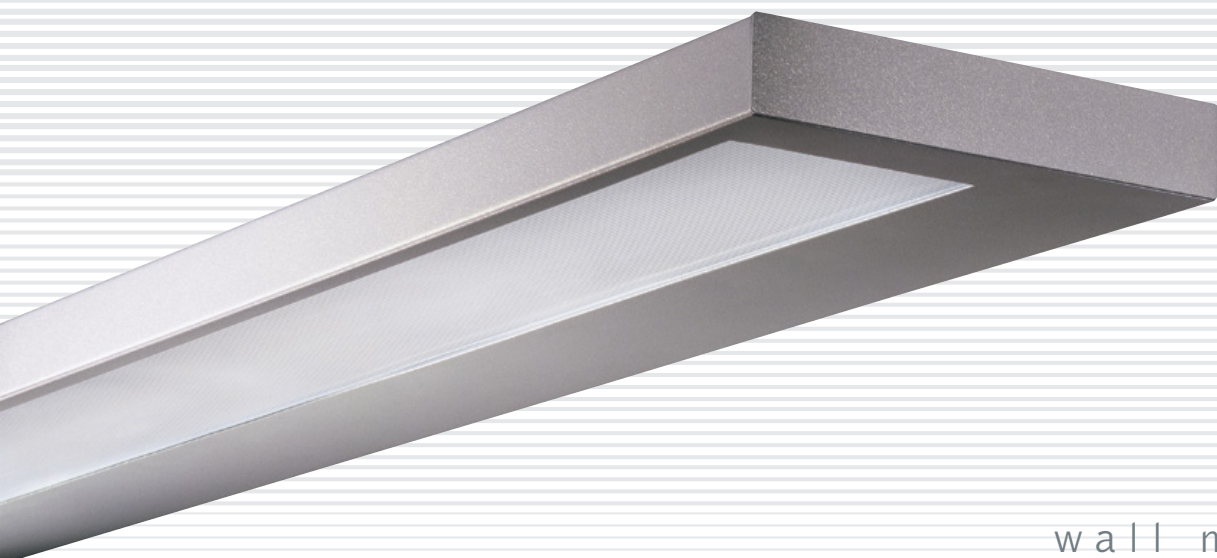

w a l l m o u n t

0



suspended
linear

metro

from Focal Point.

Slim lines and unobtrusive visual appeal created from simple component forms. In each Metro design, rectangles, circles and lines come together in a symphony of simplicity. A luminous acrylic diffuser is the base for the latest and most revolutionary product family from lighting's style leader. Focal Point® again brings artistry to light with the Metro product family; low profile style from fixtures that truly epitomize The Art of Light™.







s t y l e



i n t e g r a t e

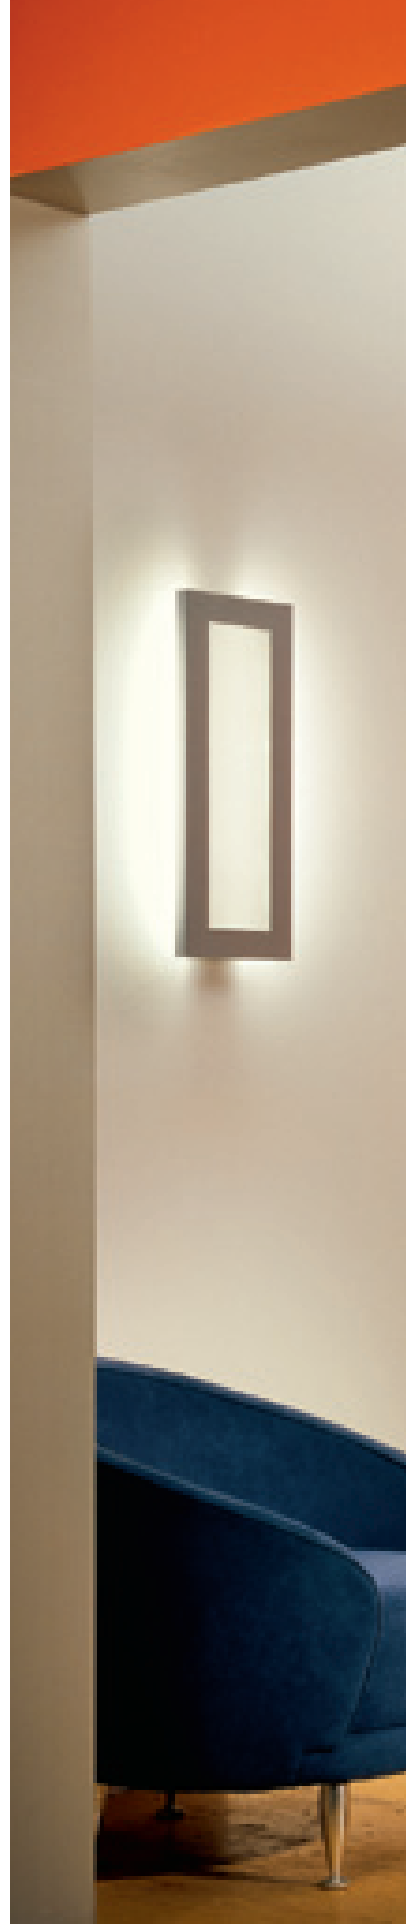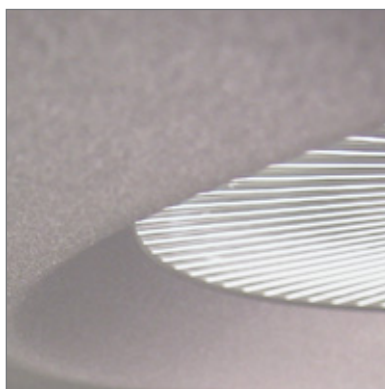





4'



2'



1'



l i n e s


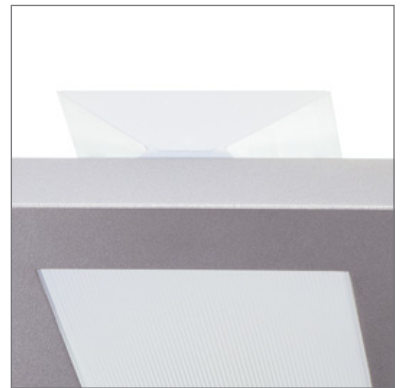





Photo: Hedrich Blessing (Craig Dugan).

s i m p l e / e l e g a n t



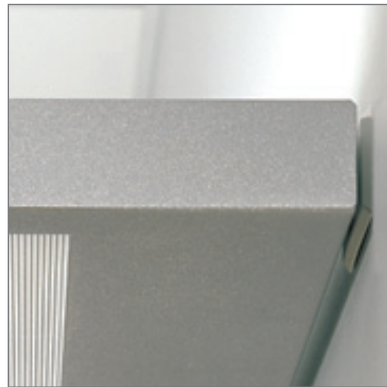

In its suspended linear form, Metro may be configured as single 4' or 8' fixtures, or joined in continuous runs.

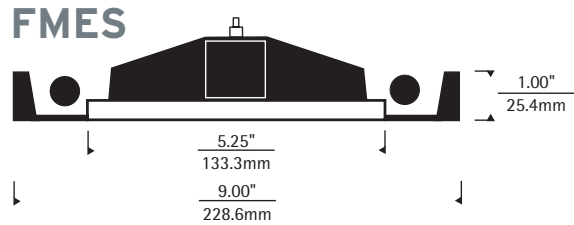


Order Information

Fixture Series	FMES	Voltage		Factory Options	
Metro	FMES	120 Volt	120	Emergency Circuit	EC
		277 Volt	277	Emergency Battery Pack	EM
Shielding	PA	Ballast		HLR/GLR Fuse	FU
Linear Patterned Acrylic Diffuser	PA	Electronic Program Start <10% THD	S	Include 3000K Lamp	L830
		Electronic Dimming Ballast	D	Include 3500K Lamp	L835
		(Consult factory for T5 Et T5HO dimming availability.)		Include 4100K Lamp	L841
Lamping		Suspension		Finish	
2 Lamp T5	2T5	24" Cable Suspension	C24	Titanium Silver	TS
2 Lamp T5HO	2T5HO	48" Cable Suspension	C48	Matte Satin White	WH
		96" Cable Suspension	C96		
Circuit	1C			Fixture Run Length	
Single Circuit	1C			4'	4'
				8'	8'
				12' (8'+4')	12'
				16' (8'+8')	16'
				20' (8'+4'+8')	20'
				24' (8'+8'+8')	24'



Metro wall mount may be configured as single 4' or 8' fixtures, or joined in continuous runs.


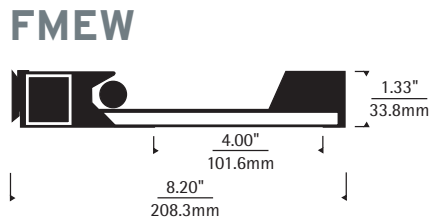


Order Information

Fixture Series	FMEW	Ballast		Finish	
Metro	FMEW	Electronic Program Start <10% THD	S	Titanium Silver	TS
		Electronic Dimming Ballast	D	Matte Satin White	WH
		(Consult factory for T5 Et T5HO dimming availability.)			
Shielding	PA	Mounting	WM	Fixture Run Length	
Linear Patterned Acrylic Diffuser	PA	Wall Mount	WM	4'	4'
				8'	8'
				12' (8'+4')	12'
				16' (8'+8')	16'
				20' (8'+4'+8')	20'
				24' (8'+8'+8')	24'
Lamping		Factory Options		(Above are nominal lengths. See continuous run configurations for exact dimensions.)	
1 Lamp T5	1T5	Emergency Circuit	EC		
1 Lamp T5HO	1T5HO	Emergency Battery Pack	EM		
		HLR/GLR Fuse	FU		
Circuit	1C				
Single Circuit	1C				
Voltage					
120 Volt	120				
277 Volt	277				
		Include 3000K Lamp	L830		
		Include 3500K Lamp	L835		
		Include 4100K Lamp	L841		



Metro's round suspended variations incorporate a range of lamping possibilities.

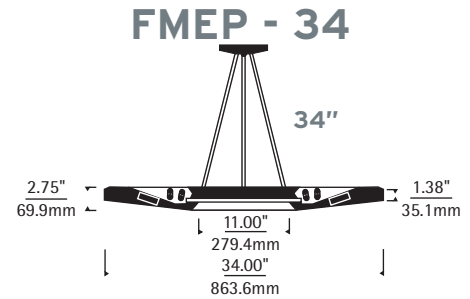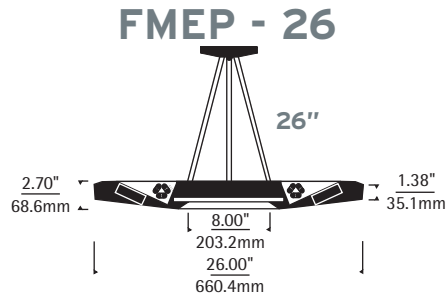


Order Information

Fixture Series	FMEP
Metro	FMEP
Profile	
26" Diameter	
34" Diameter	
Lamping	
4 Lamp 26w. Triple Tube, GX24q-3	426TT
4 Lamp 32w. Triple Tube, GX24q-3	432TT
4 Lamp 42w. Triple Tube, GX24q-4	442TT
3 Lamp BX40	3BX40
3 Lamp BX50	3BX50
3 Lamp BX55	3BX55
6 Lamp BX40	6BX40
6 Lamp BX50	6BX50
6 Lamp BX55	6BX55
Circuit	
Single Circuit	1C
Dual Circuit	2C


Voltage	
120 Volt	120
277 Volt	277
Ballast	
Electronic Program start <10% THD	S
Electronic Dimming Ballast	D
(Consult factory for dimming availability on 42w, 40w. and 50w. Triple Tube.)	
Suspension	
Metal Braided Cable	M _ _
(Standard lengths for metal braided cord are as follows: 18", 24", 30", 36", 42", 48", 54")	
24" Aircraft Cable	C24
48" Aircraft Cable	C48
96" Aircraft Cable	C96
45° Swivel Stem	B _ _
(Specify stem length in inches)	

Factory Options	
Emergency Circuit	EC
(EC option requires entire fixture to be wired as emergency circuit.)	
Emergency Battery Pack	EM
HLR/GLR Fuse	FU
Include 3000K Lamp	L830
Include 3500K Lamp	L835
Include 4100K Lamp	L841
Finish	
Titanium Silver	TS
Matte Satin White	WH

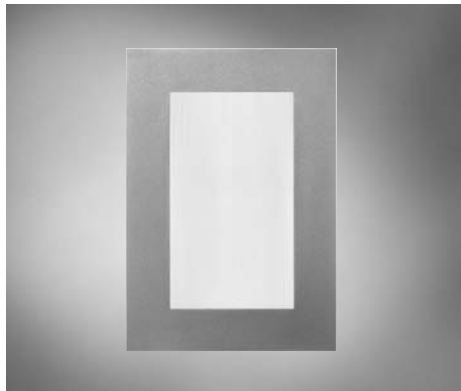


Sconce versions of metro are ADA compliant.

FMEC - 1



FMEC - 2 / 4

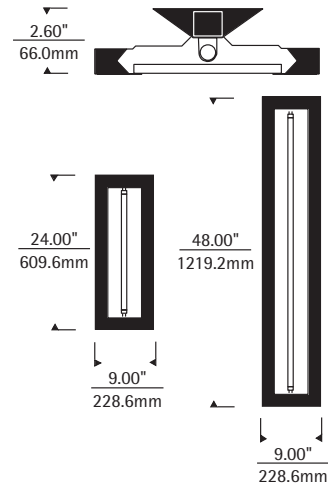

Order Information

Fixture Series	FMEC
Metro	FMEC
Profile	
1' Length	1
2' Length	2
4' Length	4
Lamping	
(1' Length Only) 1 Lamp BX18	1BX18
(2' & 4' Length Only) 1 Lamp T5HO	1T5HO
Circuit	
Single Circuit	1C

Voltage	
120 Volt	120
277 Volt	277
Ballast	
Electronic Program Start <10% THD	S
Mounting	
Wall Mount	WM
Factory Options	
HLR/GLR Fuse	FU
Include 3000K Lamp	L830
Include 3500K Lamp	L835
Include 4100K Lamp	L841
Finish	
Titanium Silver	TS
Matte Satin White	WH



FOCAL POINT LLC
4201 South Pulaski Road
Chicago, Illinois 60632
t 773.247.9494
f 773.247.8484

www.focalpointlights.com