



# Quickship Guide

5 & 10 DAY CONFIGURATIONS



**FOCAL POINT®**

Bringing It All To Light®



# Quickship Policies

Quickship is a broad, made-to-order offering of architectural luminaires that support all main areas of a project. We leverage our vertical integration and on-site manufacturing capabilities to ship a wide variety of options in 5 and 10 days. Unlike a stock program, Quickship gives you the ability to satisfy tight project schedules without sacrificing quality or selection.

## HOW TO USE THIS GUIDE

The product options included in this guide all qualify for Quickship. Simply complete a catalog number by selecting the options you require and clearly mark your order as Quickship for fast processing. For more information or an expanded list of options, please consult the individual product cut sheets at [focalpointlights.com](http://focalpointlights.com).

## QUICKSHIP POLICIES

Quickship line items must be denoted as such to ship with the 5- or 10-day terms of the program whether an entire order is comprised of only Quickship items or it includes both Quickship and standard line items.

Items with different lead times will ship separately unless the order is marked as "SHIP COMPLETE". In that case, the entire order will ship with the longest lead time.

Estimated ship dates (ESD) are determined per the following example: If a clean order is received by 11:00am CST on Monday for a 5-day item, the ESD for that item will be the following Monday. Orders received after 11am will receive an ESD based on the following business day.

## ORDER CHECKLIST

- ✔ Complete and correct catalog numbers
- ✔ **Quickship** clearly denoted in subject line of email and on PO
- ✔ Complete PO with proper terms
- ✔ Run lengths when required
- ✔ EM/EC locations and voltage when required

## REMINDERS

All ship dates are estimated. 5- and 10-day lead times do not include weekends or holidays.

Consult factory for options or quantities not shown in this guide. Large quantities may not qualify for Quickship.

Partial shipments may be required based on current factory loads.

Change orders of any kind will affect lead time.

## CONTRACTOR SUPPORT

With our Quickship program and a host of resources found in the Contractor Zone of our website, we support quick-turn and design-build projects from specification to installation.

Learn more at [focalpointlights.com/contractorzone](http://focalpointlights.com/contractorzone)



# Quickship Index



## ACOUSTIC SOLUTIONS

Seem® 1 Acoustic Suspended & Direct/Indirect	4
Seem® 1 Acoustic Indirect & Unlit	6
AirCore® Blade Unlit Acoustic	8
TruTile™ Wall Tiles	10



## ID+ DOWNLIGHTS & CYLINDERS

ID+ 3.5" Downlight & Wall Wash	12
ID+ 3.5" Trimless Downlight & Wall Wash	14
ID+ 3.5" x 3.5" Downlight & Wall Wash	16
ID+ 3.5" x 3.5" Trimless Downlight & Wall Wash	18
ID+ 4.5" Downlight & Wall Wash	20
ID+ 4.5" Trimless Downlight & Wall Wash	22
ID+ 4.5" x 4.5" Downlight & Wall Wash	24
ID+ 4.5" x 4.5" Trimless Downlight & Wall Wash	26
ID+ 3.5" Cylinders	28
ID+ 3.5" Pure Cylinders	30
ID+ 4.5" Cylinders	32



## LINEAR

Seem® 1 Suspended / Direct/Indirect	34
Seem® 1 Recessed	36
Seem® 2 Suspended / Wall Mount	37
Seem® 2 Suspended / Wall Mount Direct/Indirect	40
Seem® 2 Recessed / Pop-Down	42
Seem® 4 Suspended / Pop-Down / Wall Mount	44
Seem® 4 Suspended / Wall Mount Direct/Indirect	46
Seem® 4 Recessed / Pop-Down	48
Seem® 4-LP	50
Seem® 6 Recessed	52



## PERIMETER & COVE

Seem® 2 Perimeter / Grazer / Asymmetric Room Fill	54
Seem® 4 Perimeter / Grazer / Asymmetric Room Fill	56
Covert Lite®	58



## ARCHITECTURAL TROFFERS

Aerion®	60
Amica® 2	62
Amica® LED	64
Equation® 2	66
Luna® LED	68
Veer® LED	70

## FEATURE KEY





# SEEM<sup>®</sup> 1 ACOUSTIC

SUSPENDED & DIRECT/INDIRECT



# SEEM 1 ACOUSTIC SUSPENDED & DIRECT/INDIRECT

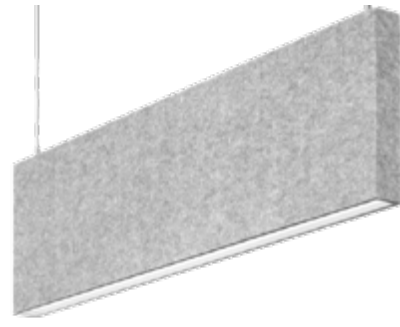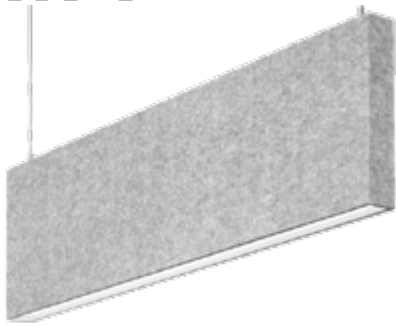

Seem 1 Acoustic	—	ASM1S
<b>Shielding</b>		
Asymmetric Wall Wash	AS	_____
Batwing Lens	BW	_____
Regress Lens	RL	_____
<b>Luminaire Height</b>		
(heights are nominal)		_____
8"	8	_____
12"	12	_____
16"	16	_____
<b>Lumen Output</b>		
100 Lumens per foot	100LF	_____
(4 minimum.)		_____
200 Lumens per foot	200LF	_____
300 Lumens per foot	300LF	_____
400 Lumens per foot	400LF	_____
500 Lumens per foot	500LF	_____
<b>Color Temperature</b>		
3000K, 80CRI	30K	_____
3500K, 80CRI	35K	_____
4000K, 80CRI	40K	_____
<b>Circuits &amp; Zones</b>		
1 Circuit, non-emergency	1C	_____
<b>Voltage</b>		
120/277 UNV Volt	UNV	_____
<b>Control System &amp; Dimming Level</b>		
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
<b>Mounting</b>		
<u>Suspended</u>		
(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)		_____
24" Cable Suspension	J24_	_____
48" Cable Suspension	J48_	_____
96" Cable Suspension	J96_	_____
120" Cable Suspension	J120_	_____
(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.)		_____
(Consult factory for sloped ceiling applications.)		_____
<u>Surface Mounted</u>		
(30" power cable standard. Consult factory for longer power cable lengths.)		_____
Direct/Flush to Grid	DTG	_____
Direct/Flush to Strut	DTS	_____
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
<b>Acoustic Panel Color</b>		
See below for color offering		_____
<b>Length</b>		
4', 6', 8', 10', 12', 14', or 16'		_____
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field)		_____

Seem 1 Acoustic Direct/Indirect	—	ASM1BS
<b>Shielding</b>		
Batwing Optic Top/Asymmetric Wall Wash Bottom	BWAS	_____
Batwing Optic Top/Batwing Lens Bottom	BWBW	_____
Batwing Optic Top/Regress Lens	BWRL	_____
Dust Cover Top/Asymmetric Wall Wash Bottom	DCAS	_____
Dust Cover Top/Batwing Lens Bottom	DCBW	_____
Dust Cover Top/Regress Lens	DCRL	_____
<b>Luminaire Height</b>		
(heights are nominal)		_____
8"	8	_____
12"	12	_____
16"	16	_____
<b>Direct Distribution</b>		
100 Lumens per foot	100DN	_____
200 Lumens per foot	200DN	_____
300 Lumens per foot	300DN	_____
400 Lumens per foot	400DN	_____
500 Lumens per foot	500DN	_____
<b>Indirect Distribution</b>		
125 Lumens per foot	125UP	_____
(Consult factory for Lutron & DALI)		_____
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
800 Lumens per foot	800UP	_____
<b>Color Temperature</b>		
3000K, 80CRI	30K	_____
3500K, 80CRI	35K	_____
4000K, 80CRI	40K	_____
<b>Circuits &amp; Zones</b>		
1 Circuit, non-emergency	1C	_____
2 non-emergency circuits provide independent control of Direct and Indirect sources	2C	_____
<b>Voltage</b>		
120/277 UNV Volt	UNV	_____
<b>Control System &amp; Dimming Level</b>		
0-10V - 10% Dimming	LD1	_____
0-10V - 1% Dimming	L11	_____
<b>Mounting</b>		
(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)		_____
24" Cable Suspension	J24_	_____
48" Cable Suspension	J48_	_____
96" Cable Suspension	J96_	_____
120" Cable Suspension	J120_	_____
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
<b>Acoustic Panel Color</b>		
See below for color offering		_____
<b>Length</b>		
4', 6', 8', 10', 12', 14', or 16'		_____
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field)		_____

## QS QUICKSHIP TERMS

**10 DAY:** Five color options. Maximum linear feet is 200' of acoustic products per order.

**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

## QS QUICKSHIP TERMS

**10 DAY:** Five color options. Maximum linear feet is 200' of acoustic products per order.

**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

## ACOUSTIC MATERIAL COLORS



CHARCOAL GRAY **CHG**



SHADOW GRAY **SDG**



SILVER GRAY **SLG**



NATURAL LINEN **NTL**





CLASSIC WHITE **CWH**

# SEE M<sup>®</sup> 1 ACOUSTIC

INDIRECT & UNLIT



# SEEM 1 ACOUSTIC INDIRECT & UNLIT

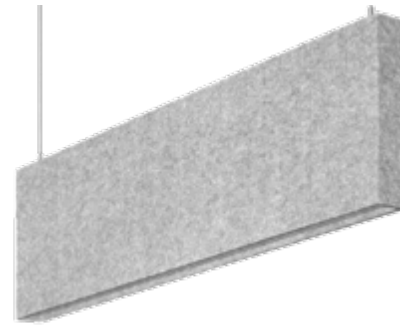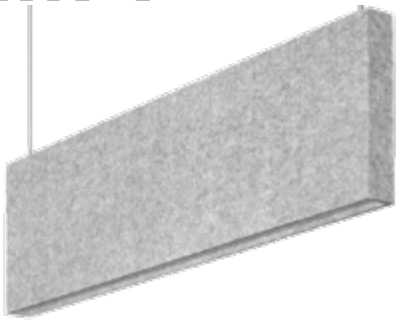

Seem 1 Acoustic Indirect		—	ASM1S
<b>Shielding</b>			
Batwing Top/Solid Bottom	BWSD		
Dust Cover Top/Solid Bottom	DCSD		
<b>Luminaire Height</b>			
(heights are nominal)			
8"	8		
12"	12		
16"	16		
<b>Lumen Output</b>			
125 Lumens per foot	125LF		
(4' minimum.)			
250 Lumens per foot	250LF		
375 Lumens per foot	375LF		
500 Lumens per foot	500LF		
625 Lumens per foot	625LF		
800 Lumens per foot	800LF		
<b>Color Temperature</b>			
3000K, 80CRI	30K		
3500K, 80CRI	35K		
4000K, 80CRI	40K		
<b>Voltage</b>			
120/277 UNV Volt	UNV		
<b>Control System &amp; Dimming Level</b>			
0-10V - 10% Dimming	LD1		
0-10V - 1% Dimming	L11		
<b>Mounting</b>			
(Mounting hang kits ship with order. Power cable is 18" longer than suspension length. Consult factory for longer power cable lengths.)			
24" Cable Suspension	J24__		
48" Cable Suspension	J48__		
96" Cable Suspension	J96__		
120" Cable Suspension	J120__		
<b>Factory Options</b>			
Black Cord	BKCD		
<b>Acoustic Panel Color</b>			
See below for color offering			
<b>Length</b>			
4', 6', 8', 10', 12', 14', or 16'			
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)			

Seem 1 Acoustic Unlit		—	AUSM1S
<b>Shielding</b>			<b>SD</b>
Solid Bottom		SD	
<b>Baffle Height</b>			
(heights are nominal)			
8"	8		
12"	12		
16"	16		
<b>Mounting</b>			
<b>Suspended</b>			
(Mounting hang kits ship with order)			
24" Cable Suspension	J24__		
48" Cable Suspension	J48__		
96" Cable Suspension	J96__		
<b>Surface Mounted</b>			
Direct/Flush to Grid	DTG		
Direct/Flush to Strut	DTS		
No Hardware	NH		
<b>Acoustic Panel Color</b>			
See below for color offering			
<b>Baffle Length</b>			
4', 6', 8', 10', 12', 14', or 16'			
(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)			

## QS QUICKSHIP TERMS

**10 DAY:** Five color options. Maximum linear feet is 200' of acoustic products per order.

## QS QUICKSHIP TERMS

**10 DAY:** Five color options. Maximum linear feet is 200' of acoustic products per order.

### ACOUSTIC MATERIAL COLORS




CHARCOAL GRAY **CHG**



SHADOW GRAY **SDG**



SILVER GRAY **SLG**



NATURAL LINEN **NTL**



CLASSIC WHITE **CWH**

# AIRCORE<sup>®</sup> BLADE

UNLIT ACOUSTIC






# AIRCORE BLADE UNLIT ACOUSTIC



<b>AirCore Blade</b>	—	<b>AUABS</b>
<b>Baffle Height</b> <small>(heights are nominal)</small>		_____
8"	8	
12"	12	
16"	16	
<b>Mounting</b>		_____
<b>Suspended</b>		
<small>(Mounting hang kits ship with order)</small>		
24" Cable Suspension	J24__	
48" Cable Suspension	J48__	
96" Cable Suspension	J96__	
120" Cable Suspension	J120__	
<small>(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WH.) (Consult factory for sloped ceiling applications)</small>		
<b>Surface Mounted</b>		
Direct/Flush to Grid	DTG	
Direct/Flush to Strut	DTS	
No Hardware	NH	
<b>Acoustic Panel Color</b>		_____
See below for color offering		
<b>Baffle Length</b>		_____
4', 6', or 8'		
<small>(Luminaires are 3/4" longer than specified and cannot be cut to length or joined in the field.)</small>		

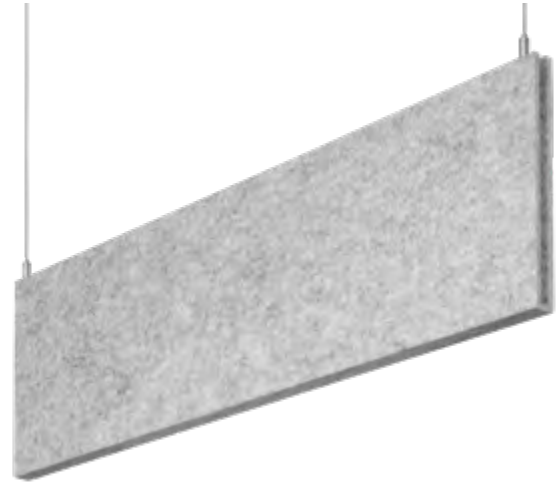

## QS QUICKSHIP TERMS

**10 DAY:** Five color options. Maximum linear feet is 200' of acoustic products per order.

### ACOUSTIC MATERIAL COLORS



CHARCOAL GRAY **CHG**



SHADOW GRAY **SDG**



SILVER GRAY **SLG**




NATURAL LINEN **NTL**




CLASSIC WHITE **CWH**

# TTRUTILE™ WALLTILES

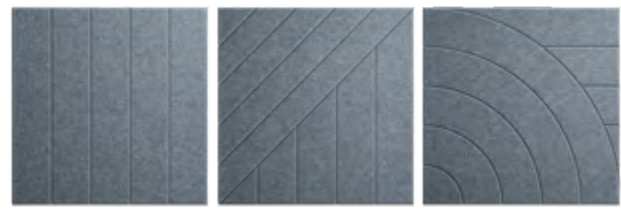

**Wide Rule      Wide Slant      Wide Arc**

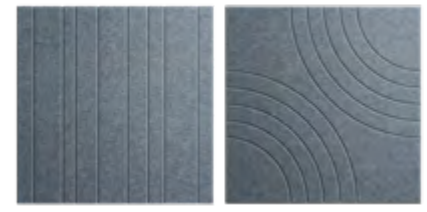

**Multitrack      Double Arc**



**Diamond      Willow**

<b>TruTile Designs</b>	—	<b>AUTT</b>
<b>2x2 Size</b>	—	<b>22</b>
<b>Square Shape</b>	—	<b>SQ</b>
<b>Solid Design</b>		
Wide Rule	WRL	
Wide Arc	WAC	
Wide Slant	WST	
Double Arc	DAC	
Multitrack	MTK	
Diamond	DMD	
Willow	WLO	
Solid	SD	
<b>Surface Mount by others</b>	—	<b>SM</b>
<b>Acoustic Panel Color</b>		

See below for color offering

**QS QUICKSHIP TERMS**


**10 DAY:** Five color options. 10-day up to 200 pieces.

# TRUTILE




**Pinwale**

**Feathercord**

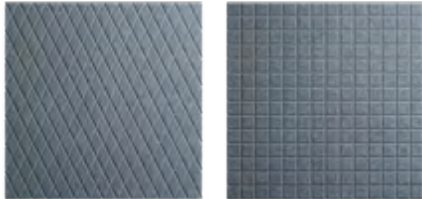

**Lattice**

**Grid 49**

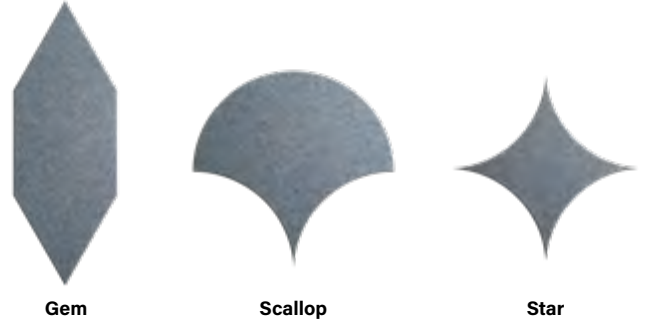

**Gem**

**Scallop**

**Star**

<b>TruTile Textures</b>	—	<b>AUTT</b>
<b>2x2 Size</b>	—	<b>22</b>
<b>Square Shape</b>	—	<b>SQ</b>
<b>Solid Design</b>		
Pinwale	PWL	
Feathercord	FCD	
Lattice	LTC	
Grid 49	G49	
Solid	SD	
<b>Surface Mount by others</b>	—	<b>SM</b>
<b>Acoustic Panel Color</b>		
See below for color offering		

<b>TruTile Shapes</b>	—	<b>AUTT</b>
<b>2x2 Size</b>	—	<b>22</b>
<b>Shape</b>		
Gem	GEM	
Scallop	SCP	
Star	STR	
<b>Solid Design</b>	—	<b>SD</b>
<b>Surface Mount by others</b>	—	<b>SM</b>
<b>Acoustic Panel Color</b>		
See below for color offering		

**QS QUICKSHIP TERMS**

**10 DAY:** Five color options. 10-day up to 200 pieces.

**QS QUICKSHIP TERMS**

**10 DAY:** Five color options. 10-day up to 200 pieces.

**ACOUSTIC MATERIAL COLORS**



**CHARCOAL GRAY CHG**



**SHADOW GRAY SDG**



**SILVER GRAY SLG**



**NATURAL LINEN NTL**



**CLASSIC WHITE CWH**

1D + 3.5"

DOWNLIGHT & WALL WASH



# ID+ 3.5" DOWNLIGHT & WALL WASH



### Housing Ordering

ID+ 3.5" Downlight	—	FLC3D
<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Voltage</b>		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	
Emergency Battery with Remote Test Switch <small>(T-rated housing only. Above ceiling access required.)</small>	EMR	

### Trim & LED Module

Aperture: 3.5" Round Reflector	—	LC3
<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Color Temperature</b>		
2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	
<b>Optional Flange Finish</b> <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



### Housing Ordering

ID+ 3.5" Wall Wash	—	FLC3W
<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Voltage</b>		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	

### Trim & LED Module

Aperture	—	LC3
3.5" Round Reflector	LC3	
3.5" Round Airtight Reflector	LC3AT	
<b>Trim Type: Round Overlap</b>	—	<b>RO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Color Temperature</b>		
2700K, 80+ CRI <b>or</b> 90+ CRI	27K <b>or</b> 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	
<b>Optional Flange Finish</b> <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



**5 DAY:** 200 pieces or less




**5 DAY:** 100 pieces or less

# 10' + 3.5"

## TRIMLESS DOWNLIGHT & WALL WASH



# ID+ 3.5" TRIMLESS DOWNLIGHT & WALL WASH

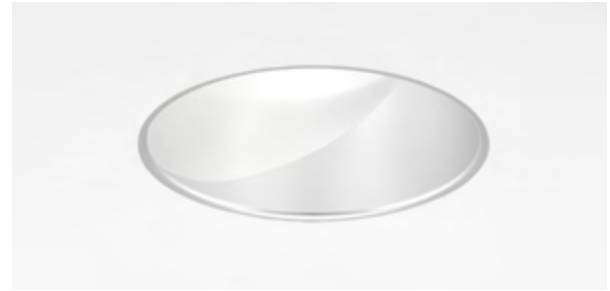

## Housing Ordering

ID+ 3.5" Downlight		FLC3D
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b>		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Voltage</b>		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	

## Trim & LED Module

Aperture: 3.5" Round Reflector		LC3
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b> (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	

## Housing Ordering

ID+ 3.5" Wall Wash		FLC3W
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b>		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Voltage</b>		
120/270 Volt (IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	

## Trim & LED Module

Aperture		LC3
3.5" Round Reflector	LC3	
3.5" Round Airtight Reflector	LC3AT	
Trim Type: Round Trimless	—	RT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b> (Trim & housing output must match)		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	



5 DAY: 200 pieces or less



5 DAY: 100 pieces or less

10 + 3.5" X 3.5"

DOWNLIGHT & WALL WASH





# ID+ 3.5" x 3.5" DOWNLIGHT & WALL WASH



### Housing Ordering

ID+ 3.5" x 3.5" Downlight	—	FLC33D
<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
	1100L	
	1300L	
	1500L	
	1700L	
	1900L	
	2100L	
<b>Voltage</b>		
120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	
Emergency Battery with Remote Test Switch <small>(T-rated housing only. Above ceiling access required.)</small>	EMR	
<b>Trim &amp; LED Module</b>		
<b>Aperture: 3.5" Square Reflector</b>	—	<b>LC33</b>
<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	
<b>Optional Flange Finish</b> <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



### Housing Ordering

ID+ 3.5" x 3.5" Wall Wash	—	FLC33W
<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
<b>Voltage</b>		
120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	
<b>Trim &amp; LED Module</b>		
<b>Aperture</b>		
3.5" Square Reflector	LC33	
3.5" Square Airtight Reflector	LC33AT	
<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	
<b>Optional Flange Finish</b> <small>(CD finish only. For matching finishes leave blank)</small>		
White Painted	WP	



**5 DAY:** 200 pieces or less



**5 DAY:** 100 pieces or less

# ID + 3.5" X 3.5"

## TRIMLESS DOWNLIGHT & WALL WASH



# ID+ 3.5" x 3.5" TRIMLESS DOWNLIGHT & WALL WASH



## Housing Ordering

ID+ 3.5"x3.5" Downlight		FLC33D
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b>		
700 Lumen (Not available with LFP)	700L	
900 Lumen (Not available with LFP)	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Voltage</b>		
120/270 Volt <small>(IC-rated housing: SW - 1700lm max. T-rated housing: SW - 1100lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC / Airtight	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	

## Trim & LED Module

Aperture: 3.5" Square Reflector	—	LC33
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
1700 Lumen	1700L	
1900 Lumen	1900L	
2100 Lumen	2100L	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	DNT	
Short Cone with 60° cut-off	DNS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	

## Housing Ordering

ID+ 3.5"x3.5" Wall Wash		FLC33W
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
<b>Voltage</b>		
120/270 Volt <small>(IC-rated housing: SW - 1100lm max. T-rated housing: SW - 700lm max.)</small>	UNV	
120V (T-rated housing only)	120	
277V (T-rated housing only)	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
Thermally Protected, Non-IC	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum	CP	

## Trim & LED Module

Aperture	3.5" Square Reflector	LC33
	3.5" Square Airtight Reflector	LC33AT
Trim Type: Square Die-Cast Trimless	—	SDT
Color Options: Standard White, 80 & 90 CRI	—	SW
<b>Lumen Output</b> <small>(Trim &amp; housing output must match)</small>		
700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
<b>Color Temperature</b>		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
<b>Optic</b>		
Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
<b>Finish</b>		
Clear Diffuse	CD	
White	WH	



5 DAY: 100 pieces or less



5 DAY: 200 pieces or less

# 10' + 4.5" DOWNLIGHT & WALL WASH



\*4.5" Downlights

# ID+ 4.5" DOWNLIGHT & WALL WASH



ID+ 4.5" Downlight		—	FLC4D
<b>Trim Type: Round Overlap</b>		—	<b>RO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>		—	<b>SW</b>
<b>Lumen Output</b>			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
(Not available with SP distribution or LFP.)			
<b>Voltage</b>			
UNV 120V/277V	UNV		
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)			
120V	120		
277V	277		
<b>Control System &amp; Dimming Level</b>			
0-10V - 1% Dimming	L11		
0-10V - 10% Dimming	LD1		
Forward Phase (120V only)	LFP		
<b>Housing Type</b>			
IC Rated / Airtight	IC		
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)			
Thermally Protected	T		
<b>Factory Options</b>			
Bar Hangers	BH		
Chicago Plenum / National Plenum	CP		
Emergency Battery	EM		
(Must order LC4EM trim. Not wet location or outdoor rated.)			
<b>Aperture</b>			
4.5" Round Reflector	LC4		
4.5" Round Reflector - Airtight	LC4AT		
(IC housing required for Airtight rating)			
4.5" Round Reflector - Emergency	LC4EM		
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)			
<b>Trim Type: Round</b>		—	<b>RO</b>
<b>Lumen Output</b>			
(Trim & housing output must match)			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
(Not available with SP distribution.)			
<b>Color Temperature</b>			
3000K, 80+ CRI	30K		
3500K, 80+ CRI or 90+ CRI	35K or 935K		
4000K, 80+ CRI	40K		
<b>Optic: Downlight with 50° cut-off</b>		—	<b>DN</b>
<b>Distribution</b>			
Spot	SP		
Narrow Flood	NFL		
Flood 1	FL1		
Flood 2	FL2		
Wide Flood	WFL		
<b>Reflector Color</b>			
Clear Diffuse	CD		
White (White Painted flange only)	WH		
<b>Flange Finish</b>			
Non-Painted (Clear Diffuse only)	NP		
White Painted	WP		

ID+ 4.5" Downlight		—	FLC4W
<b>Trim Type: Round Overlap</b>		—	<b>RO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>		—	<b>SW</b>
<b>Lumen Output</b>			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
(Not available with LFP.)			
<b>Voltage</b>			
UNV 120V/277V	UNV		
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)			
120V	120		
277V	277		
<b>Control System &amp; Dimming Level</b>			
0-10V - 1% Dimming	L11		
0-10V - 10% Dimming	LD1		
Forward Phase (120V only)	LFP		
<b>Housing Type</b>			
IC Rated / Airtight	IC		
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)			
Thermally Protected	T		
<b>Factory Options</b>			
Bar Hangers	BH		
Chicago Plenum / National Plenum	CP		
<b>Aperture</b>			
4.5" Round Reflector	LC4		
4.5" Round Reflector - Airtight	LC4AT		
(IC housing required for Airtight rating)			
<b>Trim Type: Round</b>		—	<b>RO</b>
<b>Lumen Output</b>			
(Trim & housing output must match)			
1000 Lumens	1000L		
1500 Lumens	1500L		
2000 Lumens	2000L		
2500 Lumens	2500L		
3000 Lumens	3000L		
<b>Color Temperature</b>			
3000K, 80+ CRI	30K		
3500K, 80+ CRI or 90+ CRI	35K or 935K		
4000K, 80+ CRI	40K		
<b>Optic: Wall Wash</b>		—	<b>WW</b>
<b>Reflector Color</b>			
Clear Diffuse	CD		
White (White Painted flange only)	WH		
<b>Flange Finish</b>			
Non-Painted (Clear Diffuse only)	NP		
White Painted	WP		

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less

# ID + 4.5"

## TRIMLESS DOWNLIGHT & WALL WASH



\*4.5" Downlights

# ID+ 4.5" TRIMLESS DOWNLIGHT & WALL WASH



<b>ID+ 4.5" Trimless Downlight</b>	—	<b>FLC4D</b>
<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
<b>Voltage</b>		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC4EM trim. Not wet location or outdoor rated.)		
<b>Aperture</b>		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight	LC4AT	
(IC housing required for Airtight rating)		
4.5" Round Reflector - Emergency	LC4EM	
(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)		
<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
<b>Lumen Output</b>		
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
<b>Distribution</b>		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
<b>Reflector Color</b>		
Clear Diffuse	CD	
White	WH	

<b>ID+ 4.5" Trimless Wall Wash</b>	—	<b>FLC4W</b>
<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with LFP.)		
<b>Voltage</b>		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
(L11 & LD1 2000L max. LFP 1500L max. LC4AT required for Airtight.)		
Thermally Protected	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
<b>Aperture</b>		
4.5" Round Reflector	LC4	
4.5" Round Reflector - Airtight	LC4AT	
(IC housing required for Airtight rating)		
<b>Trim Type: Round Trimless</b>	—	<b>RT</b>
(Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
<b>Optic: Wall Wash</b>	—	<b>WW</b>
<b>Reflector Color</b>		
Clear Diffuse	CD	
White	WH	

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less

# ID + 4.5" X 4.5"

## DOWNLIGHT & WALL WASH



\*4.5" x 4.5" Downlights



# ID+ 4.5" x 4.5" DOWNLIGHT & WALL WASH



<b>ID+ 4.5" x 4.5" Downlight</b>	—	<b>FLC44D</b>
<b>Trim Type: Square Overlap</b>	—	<b>SO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution or LFP.)		
<b>Voltage</b>		
UNV 120V/277V	UNV	
(IC housing only. Not available with LFP. See Housing Type for output restrictions.)		
120V	120	
277V	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight (L11 & LD1 2000L max. LFP 1500L max. LC44AT required for Airtight.)	IC	
Thermally Protected	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
(Must order LC44EM trim. Not wet location or outdoor rated.)		
<b>Aperture</b>		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight (IC housing required for Airtight rating)	LC44AT	
4.5" Square Reflector - Emergency (Required for "EM" option. DN optic only. Not wet location or outdoor rated.)	LC4EM	
<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
<b>Lumen Output</b> (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
(Not available with SP distribution.)		
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
<b>Distribution</b>		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
<b>Reflector Color</b>		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
<b>Flange Finish</b>		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	

<b>ID+ 4.5" x 4.5" Wall Wash</b>	—	<b>FLC44W</b>
<b>Trim Type: Square Overlap</b>	—	<b>SO</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens (Not available with LFP.)	2000L	
<b>Voltage</b>		
UNV 120V/277V (IC housing only. Not available with LFP. See Housing Type for output restrictions.)	UNV	
120V	120	
277V	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight (L11 & LD1 1500L max. LFP 1000L max. LC44AT required for Airtight.)	IC	
Thermally Protected	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
<b>Aperture</b>		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight (IC housing required for Airtight rating)	LC44AT	
<b>Trim Type: Square Die-Cast Overlap</b>	—	<b>SDO</b>
<b>Lumen Output</b> (Trim & housing output must match)		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI	40K	
<b>Optic: Wall Wash</b>		
<b>Reflector Color</b>		
Clear Diffuse	CD	
White (White Painted flange only)	WH	
<b>Flange Finish</b>		
Non-Painted (Clear Diffuse only)	NP	
White Painted	WP	

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less

# ID# 4.5" X 4.5"

## TRIMLESS DOWNLIGHT & WALL WASH



4.5" x 4.5" Downlights

# ID+ 4.5" x 4.5" TRIMLESS DOWNLIGHT & WALL WASH



ID+ 4.5" x 4.5" Downlight		FLC44D
<b>Trim Type: Square Trimless</b>	—	<b>ST</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
<small>(Not available with SP distribution or LFP.)</small>		
<b>Voltage</b>		
UNV 120V/277V	UNV	
<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
120V	120	
277V	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
<small>(L11 &amp; LD1 2000L max. LFP 1500L max. LC44AT required for Airtight.)</small>		
Thermally Protected	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
Emergency Battery	EM	
<small>(Must order LC44EM trim. Not wet location or outdoor rated.)</small>		
<b>Aperture</b>		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
<small>(IC housing required for Airtight rating)</small>		
4.5" Square Reflector - Emergency	LC4EM	
<small>(Required for "EM" option. DN optic only. Not wet location or outdoor rated.)</small>		
<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
<b>Lumen Output</b>		
<small>(Trim &amp; housing output must match)</small>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
<small>(Not available with SP distribution.)</small>		
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Optic: Downlight with 50° cut-off</b>	—	<b>DN</b>
<b>Distribution</b>		
Spot	SP	
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Very Wide Flood	VWFL	
<b>Reflector Color</b>		
Clear Diffuse	CD	
White	WH	

ID+ 4.5" x 4.5" Wall Wash		FLC44W
<b>Trim Type: Square Trimless</b>	—	<b>ST</b>
<b>Color Options: Standard White, 80 &amp; 90 CRI</b>	—	<b>SW</b>
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
<small>(Not available with LFP.)</small>		
<b>Voltage</b>		
UNV 120V/277V	UNV	
<small>(IC housing only. Not available with LFP. See Housing Type for output restrictions.)</small>		
120V	120	
277V	277	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Forward Phase (120V only)	LFP	
<b>Housing Type</b>		
IC Rated / Airtight	IC	
<small>(L11 &amp; LD1 1500L max. LFP 1000L max. LC44AT required for Airtight.)</small>		
Thermally Protected	T	
<b>Factory Options</b>		
Bar Hangers	BH	
Chicago Plenum / National Plenum	CP	
<b>Aperture</b>		
4.5" Square Reflector	LC44	
4.5" Square Reflector - Airtight	LC44AT	
<small>(IC housing required for Airtight rating)</small>		
<b>Trim Type: Square Die-Cast Trimless</b>	—	<b>SDT</b>
<b>Lumen Output</b>		
<small>(Trim &amp; housing output must match)</small>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Optic: Wall Wash</b>	—	<b>WW</b>
<b>Reflector Color</b>		
Clear Diffuse	CD	
White	WH	

**QS QUICKSHIP TERMS**  
5 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
5 DAY: 200 pieces or less

# ID + 3.5" CYLINDERS



\*Surface Mount Only

# ID+ 3.5" CYLINDERS



ID+ 3.5" Round Cylinder Pendant	—	FLCY3
<b>Trim Type: Round</b>	—	<b>RD</b>
<b>Decorative Reveal</b>		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
<b>Lumen Output</b>		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens (Power Canopy only)	2000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>Voltage</b>		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
<b>Canopy Configuration</b>		
Shallow Canopy, Integral Driver (L11 & LFP only)	SC	
Power Canopy	PC	
<b>Dimming Level</b>		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
<b>Mounting</b>		
72" Cable, Straight Feed (Cut in field)	C72	
144" Cable, Straight Feed (Cut in field)	C144	
<b>Optic</b>		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
<b>Factory Options</b>		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
<b>Reflector Color: Clear Diffuse</b>	—	<b>CD</b>
<b>Luminaire Finish</b>		
Black with Black cord	BK	
White with White cord	WH	

ID+ 3.5" Round Cylinder Surface Mount	—	FLCY3
<b>Trim Type: Round</b>	—	<b>RD</b>
<b>Decorative Reveal</b>		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
<b>Lumen Output</b>		
700 Lumens	700L	
1000 Lumens	1000L	
1500 Lumens	1500L	
1700 Lumens	1700L	
2000 Lumens (Power Canopy only)	2000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>Voltage</b>		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
<b>Canopy Configuration</b>		
Shallow Canopy, Integral Driver (L11 & LFP only)	SC	
Power Canopy	PC	
<b>Dimming Level</b>		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming (Shallow Canopy, Integral Driver, 120V only)	LFP	
<b>Mounting: Surface Mount</b>	—	<b>SM</b>
<b>Optic</b>		
50° Cut-off Cone (Not available with SWFL distribution)	DNT	
50° Cut-off Cone with Solite Lens (NFL distribution only)	DNTS	
80° Cut-off Cone (SWFL distribution only)	DSS	
<b>Distribution</b>		
Narrow Flood	NFL	
Flood 1	FL1	
Flood 2	FL2	
Wide Flood	WFL	
Super Wide Flood	SWFL	
<b>Factory Options</b>		
Emergency Battery (J-box cannot be recessed above the ceiling. Remote test switch.)	EMR	
<b>Reflector Color: Clear Diffuse</b>	—	<b>CD</b>
<b>Luminaire Finish</b>		
Black with Black cord	BK	
White with White cord	WH	

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less

# ID+ 3.5"

PURE CYLINDERS



# ID+ 3.5" PURE CYLINDERS



ID+ 3.5" Pure Cylinder Pendant	FLCY3N
<b>Trim Type: Round</b>	<b>RD</b>
<b>Housing Height: 7"</b>	<b>7H</b>
<b>Direct Lumen Output</b>	
700 Lumens 700DN	
900 Lumens 900DN	
1100 Lumens 1100DN	
1300 Lumens 1300DN	
1500 Lumens 1500DN	
1700 Lumens 1700DN	
1900 Lumens 1900DN	
<b>Color Temperature</b> <small>(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI.)</small>	
2700K, 80/90 _27K	
3000K, 80/90 _30K	
3500K, 80/90 _35K	
<b>Circuits</b>	<b>1C</b>
Single Circuit 1C	
<b>Voltage</b>	
UNV 120/277 Volt UNV	
120 Volt 120	
277 Volt 277	
<b>Canopy Configuration</b>	
Shallow Canopy, Integral Driver SC	
<b>Canopy Color</b>	
Matte Black BK	
Matte White WH	
<b>Control System &amp; Dimming Level</b>	
0-10V - 1% Dimming L11	
Phase Dimming LFP	
<b>Mounting</b>	
72" Cable, Straight Feed (Cut in field) C72	
144" Cable, Straight Feed (Cut in field) C144	
<b>Suspension Color</b>	
Black BK	
White WH	
<b>Direct Optic</b>	
50° cut-off cone DNT	
60° cut-off cone DNS	
75° cut-off cone with Solite Lens DSS	
<b>Direct Distribution</b>	
Narrow Flood NFL	
Flood 1 FL1	
Flood 2 FL2	
Wide Flood WFL	
Very Wide Flood (DSS only) VWFL	
Super Wide Flood (DSS only) SWFL	
<b>Reflector Color</b>	
Clear Diffuse CD	
White WH	
<b>Luminaire Finish</b>	
Black BK	
White WH	

ID+ 3.5" Pure Cylinder Surface Mount	FLCY3N
<b>Trim Type: Round</b>	<b>RD</b>
<b>Housing Height: 7"</b>	<b>7H</b>
<b>Direct Lumen Output</b>	
700 Lumens 700DN	
900 Lumens 900DN	
1100 Lumens 1100DN	
1300 Lumens 1300DN	
1500 Lumens 1500DN	
1700 Lumens 1700DN	
<b>Color Temperature</b> <small>(Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI.)</small>	
2700K, 80/90 _27K	
3000K, 80/90 _30K	
3500K, 80/90 _35K	
<b>Circuits</b>	<b>1C</b>
Single Circuit 1C	
<b>Voltage</b>	
UNV 120/277 Volt UNV	
120 Volt 120	
277 Volt 277	
<b>Canopy Configuration</b>	
Shallow Canopy, Integral Driver SC	
<b>Canopy Color</b>	
Matte Black BK	
Matte White WH	
<b>Control System &amp; Dimming Level</b>	
0-10V - 1% Dimming L11	
Phase Dimming LFP	
<b>Mounting</b>	<b>SM</b>
Surface Mount	
<b>Direct Optic</b>	
50° cut-off cone DNT	
60° cut-off cone DNS	
75° cut-off cone with Solite Lens DSS	
<b>Direct Distribution</b>	
Narrow Flood NFL	
Flood 1 FL1	
Flood 2 FL2	
Wide Flood WFL	
Very Wide Flood (DSS only) VWFL	
Super Wide Flood (DSS only) SWFL	
<b>Reflector Color</b>	
Clear Diffuse CD	
White WH	
<b>Luminaire Finish</b>	
Black BK	
White WH	

**QS QUICKSHIP TERMS**  
10 DAY: 100 pieces or less

**QS QUICKSHIP TERMS**  
10 DAY: 100 pieces or less

# ID + 4.5" CYLINDERS



\*Surface Mount Only



# ID+ 4.5" CYLINDERS



ID+ 4.5" Round Cylinder Pendant	—	FLCY4
<b>Trim Type: Round</b>	—	<b>RD</b>
<b>Decorative Reveal</b>		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens <small>(Power Canopy only)</small>	3000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>Voltage</b>		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
<b>Canopy Configuration</b>		
Shallow Canopy, Integral Driver <small>(LT1 &amp; LFP only)</small>	SC	
Power Canopy	PC	
<b>Dimming Level</b>		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming <small>(Shallow Canopy, Integral Driver, 120V only)</small>	LFP	
<b>Mounting</b>		
72" Cable, Straight Feed <small>(Cut in field)</small>	C72	
144" Cable, Straight Feed <small>(Cut in field)</small>	C144	
<b>Optic</b>		
50° Cut-off Cone <small>(Not available with SWFL distribution)</small>	DNT	
50° Cut-off Cone with Solite Lens <small>(NFL distribution only)</small>	DNTS	
80° Cut-off Cone <small>(SWFL distribution only)</small>	DSS	
<b>Distribution</b>		
Spot <small>(1000L &amp; 1500L only)</small>	SP	
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
<b>Factory Options</b>		
Emergency Battery <small>(J-box cannot be recessed above the ceiling. Remote test switch.)</small>	EMR	
<b>Reflector Color: Clear Diffuse</b>	—	<b>CD</b>
<b>Luminaire Finish</b>		
Black with Black cord	BK	
White with White cord	WH	


ID+ 4.5" Round Cylinder Surface Mount	—	FLCY4
<b>Trim Type: Round</b>	—	<b>RD</b>
<b>Decorative Reveal</b>		
White Non-Glow Reveal	WHR	
Black Non-Glow Reveal	BKR	
White Glowing Reveal	WHG	
<b>Lumen Output</b>		
1000 Lumens	1000L	
1500 Lumens	1500L	
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens <small>(Power Canopy only)</small>	3000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>Voltage</b>		
120/277 UNV	UNV	
120 Volt	120	
277 Volt	277	
<b>Shallow Canopy, Integral Driver</b>	—	<b>SC</b>
<b>Dimming Level</b>		
0-10V - 1% Dimming	L11	
Forward Phase - 1% Dimming <small>(120V only)</small>	LFP	
<b>Mounting: Surface Mount</b>	—	<b>SM</b>
<b>Optic</b>		
50° Cut-off Cone <small>(Not available with SWFL distribution)</small>	DNT	
50° Cut-off Cone with Solite Lens <small>(NFL distribution only)</small>	DNTS	
80° Cut-off Cone <small>(SWFL distribution only)</small>	DSS	
<b>Distribution</b>		
Spot <small>(1000L &amp; 1500L only)</small>	SP	
Narrow Flood	NFL	
Flood	FL	
Wide Flood	WFL	
Very Wide Flood	VWFL	
Super Wide Flood	SWFL	
<b>Factory Options</b>		
Emergency Battery <small>(J-box cannot be recessed above the ceiling. Remote test switch.)</small>	EMR	
<b>Reflector Color: Clear Diffuse</b>	—	<b>CD</b>
<b>Luminaire Finish</b>		
Black with Black cord	BK	
White with White cord	WH	

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less

**QS QUICKSHIP TERMS**  
10 DAY: 50 pieces or less

# SEEM<sup>®</sup>1

SUSPENDED & DIRECT/INDIRECT



# SEEM 1 LED



Seem 1	—	FSM1S
<b>Shielding</b>		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Lens	FL	_____
<b>Lumen Output</b>		
125 Lumens per foot (4' minimum length.)	125LF	_____
250 Lumens per foot (3' minimum length.)	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
—	—	<b>1C</b>
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
24" Cable Suspension	C24__	_____
48" Cable Suspension	C48__	_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96__	_____
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	_____
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1" increments <small>(2" minimum length.)</small>	_ft. _in.	<b>ft. in.</b>

Seem 1 Direct/Indirect	—	FSM1BS
<b>Shielding</b>		
Asymmetric optic top / Asymmetric lens bottom	ASAS	_____
Asymmetric optic top / Flush lens bottom	ASFL	_____
Batwing optic top / Asymmetric lens bottom	BWAS	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Batwing optic top / Batwing lens bottom	BWBW	_____
Dust cover top / Asymmetric lens bottom	DCAS	_____
Dust cover top / Flush lens bottom	DCFL	_____
Dust cover top / Batwing lens bottom	DCBW	_____
<b>Direct Distribution</b>		
125 Lumens per foot	125DN	_____
250 Lumens per foot	250DN	_____
375 Lumens per foot	375DN	_____
500 Lumens per foot	500DN	_____
625 Lumens per foot	625DN	_____
<b>Indirect Distribution</b>		
125 Lumens per foot	125UP	_____
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
800 Lumens per foot	800UP	_____
1000 Lumens per foot	1000UP	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
24" Cable Suspension	C24__	_____
48" Cable Suspension	C48__	_____
96" Cable Suspension <small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>	C96__	_____
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
<b>Factory Options</b>		
Black Cord	BKCD	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1" increments <small>(4" minimum length.)</small>	_ft. _in.	<b>ft. in.</b>

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length

# SEEM<sup>®</sup> 1 RECESSED



# SEEM 1 LED

Seem 1	—	FSM1
<b>Shielding</b>		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Lens	FL	_____
<b>Lumen Output</b>		
125 Lumens per foot (4' minimum length.)	125LF	_____
250 Lumens per foot (3' minimum length.)	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Mud-in Trimless	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
<b>Factory Options</b>		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		<b>ft. in.</b>
Specify luminaire/row length in 1" increments	_ft. _in.	_____

(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)



## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 2

SUSPENDED & WALL MOUNT



# SEEM 2 LED



Seem 2	—	FSM2LS
<b>Shielding</b>		
Asymmetric Lens	AS	
Batwing Lens	BW	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
<b>Lumen Output</b>		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>		
<b>120/277 UNV Voltage</b>		
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.)	C96__	
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	
<b>Factory Options</b>		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Finish</b>		
Black	BK	
White	WH	
<b>Length</b>		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

Seem 2 Wall Mount	—	FSM2LW
<b>Shielding</b>		
Asymmetric Lens	AS	
Flush Satin Lens	FL	
0.5" Pop-Down Lens	PD05	
<b>Lumen Output</b>		
125 Lumens per foot (4' minimum length.)	125LF	
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
500 Lumens per foot	500LF	
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>		
<b>120/277 UNV Voltage</b>		
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Wall Mount</b>		
<b>Factory Options</b>		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Finish</b>		
Black	BK	
White	WH	
<b>Length</b>		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length

**\*EC & EM:** 3' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length

**\*EC & EM:** 3' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 2

DIRECT/INDIRECT & WALL MOUNT





# SEEM 2 LED



Seem 2 Direct/Indirect	—	FSM2BS
<b>Shielding</b>		
Asymmetric lens bottom	ASAS	_____
Asymmetric optic top / Flush lens bottom	ASFL	_____
Asymmetric optic top / 0.5" Pop-down lens bottom	ASPD05	_____
Batwing optic top / Asymmetric lens bottom	BWAS	_____
Batwing optic top / Batwing lens bottom	BWBW	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Batwing optic top / 0.5" Pop-down lens bottom	BWPD05	_____
Dust cover top / Asymmetric lens bottom	DCAS	_____
Dust cover top / Batwing lens bottom	DCBW	_____
Dust cover top / Flush lens bottom	DCFL	_____
Dust cover top / 0.5" Pop-down lens bottom	DCPD05	_____
<b>Direct Distribution</b>		
125 Lumens per foot	125DN	_____
250 Lumens per foot	250DN	_____
375 Lumens per foot	375DN	_____
500 Lumens per foot	500DN	_____
625 Lumens per foot	625DN	_____
750 Lumens per foot	750DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
<b>Indirect Distribution</b>		
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
750 Lumens per foot	750UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1250 Lumens per foot	1250UP	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
24" Cable Suspension	C24	_____
48" Cable Suspension	C48	_____
96" Cable Suspension	C96	_____
<small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>		
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments <small>(4' minimum length.)</small>	X'	_____

Seem 2 Direct/Indirect Wall Mount	—	FSM2BW
<b>Shielding</b>		
Asymmetric lens bottom	ASAS	_____
Asymmetric optic top / Flush lens bottom	ASFL	_____
Asymmetric optic top / 0.5" Pop-down lens bottom	ASPD05	_____
Dust cover top / Asymmetric lens bottom	DCAS	_____
Dust cover top / Flush lens bottom	DCFL	_____
Dust cover top / 0.5" Pop-down lens bottom	DCPD05	_____
<b>Direct Distribution</b>		
125 Lumens per foot	125DN	_____
250 Lumens per foot	250DN	_____
375 Lumens per foot	375DN	_____
500 Lumens per foot	500DN	_____
625 Lumens per foot	625DN	_____
750 Lumens per foot	750DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
<b>Indirect Distribution</b>		
250 Lumens per foot	250UP	_____
375 Lumens per foot	375UP	_____
500 Lumens per foot	500UP	_____
625 Lumens per foot	625UP	_____
750 Lumens per foot	750UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1250 Lumens per foot	1250UP	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Wall Mount</b>		
—	—	<b>WM</b>
<b>Factory Options</b>		
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments <small>(4' minimum length.)</small>	X'	_____

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length


**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length

**\*EC & EM:** Maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 2 RECESSED

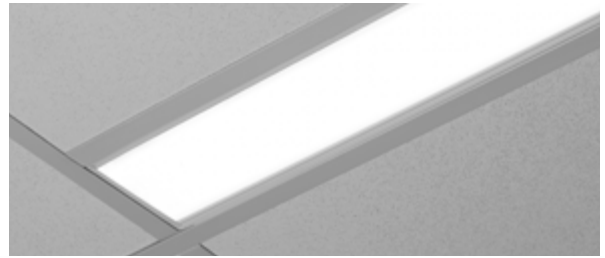

Seem 2 LED	—	FSM2L
<b>Shielding</b>		
Asymmetric Lens	AS	_____
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
0.5" Pop-Down Lens	PD05	_____
Regress Lens <small>(Housing height 5.5"; Ceiling applications only)</small>	SR	_____
Regress High Performance Lens <small>(Housing height 5.5"; Ceiling applications only)</small>	SRXP	_____
<b>Lumen Output</b>		
125 Lumens per foot <small>(LD1 &amp; L11 only, 4' minimum.)</small>	125LF	_____
250 Lumens per foot	250LF	_____
375 Lumens per foot	375LF	_____
500 Lumens per foot	500LF	_____
625 Lumens per foot	625LF	_____
750 Lumens per foot*	750LF	_____
875 Lumens per foot*	875LF	_____
1000 Lumens per foot* <small>(*Not available with SR &amp; SRXP)</small>	1000LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
<b>Factory Options</b>		
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b> Specify luminaire/row length in <b>1"</b> increments <small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	_ft. _in.	<b>ft. in.</b>

## QS QUICKSHIP TERMS



**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations.

See cut sheet ordering guide for emergency option ordering details.



# SEEM 2 LED

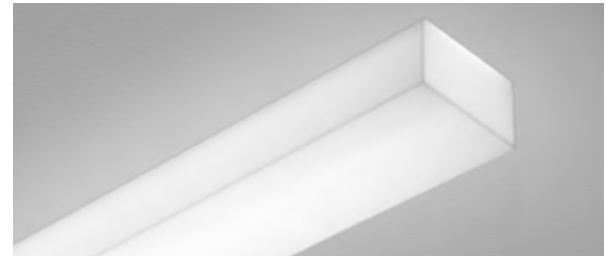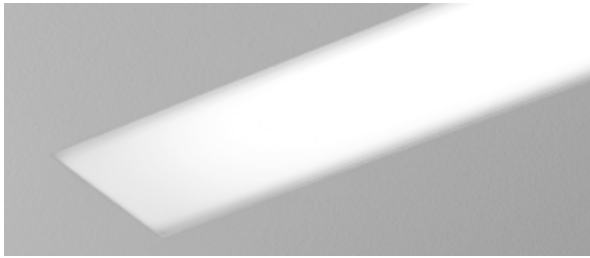

Seem 2 LED	—	FSM2L
<b>Shielding</b>		
Flush Satin Lens	FL	
Regress Lens	SR	
(Housing height 5.5" Ceiling applications only)		
Regress High Performance Lens	SRXP	
(Housing height 5.5" Ceiling applications only)		
<b>Lumen Output</b>		
125 Lumens per foot	125LF	
(LD1 & L11 only, 4' minimum.)		
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field	XFF	
(Mounting equipment assembled in field)		
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
<b>Factory Options</b>		
Chicago Plenum	CP	
(Not available with Flex Whip)		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	_ft. _in.	<b>ft. in.</b>
(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)		

Seem 2 LED	—	FSM2L
<b>Shielding - 0.5" Pop-down Lens</b>	—	<b>PD05</b>
<b>Lumen Output</b>		
125 Lumens per foot	125LF	
(LD1 & L11 only, 4' minimum.)		
250 Lumens per foot	250LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
<b>Color Temperature</b>		
3000K, 80+ CRI <b>or</b> 90+ CRI	30K <b>or</b> 930K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Trim Flange Drywall	TF	
Trim Flange Wood	TFW	
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	
Mud-in Trimless, set thickness in field	XFF	
(Mounting equipment assembled in field)		
Non-Drywall Hard Surface	XFN	
Hard Surface, Wood	XFW	
<b>Factory Options</b>		
Chicago Plenum	CP	
(Not available with Flex Whip)		
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	X'	
(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)		

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length. 48' maximum per pattern section.  
**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length  
**\*EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 4

## SUSPENDED & WALL MOUNT



Seem 4 LED	—	FSM4LS
<b>Shielding</b>		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
<b>Lumen Output</b>		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
<b>120/277 UNV Voltage</b>		
		<b>1C</b>
		<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
24" Cable Suspension	C24_	_____
48" Cable Suspension	C48_	_____
96" Cable Suspension	C96_	_____
<small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>		
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
Surface Mount	SM	_____
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	_____

### QS QUICKSHIP TERMS

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM 4 LED



Seem 4 LED Pop-Down	—	FSM4LS
<b>Shielding: 0.5" Pop-Down Lens</b>	—	<b>PD05</b>
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
24" Cable Suspension	C24__	
48" Cable Suspension	C48__	
96" Cable Suspension (Specify canopy color White (WH) or Black (BK). Example: C24WH.)	C96__	
(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)		
Surface Mount	SM	
<b>Factory Options</b>		
Black Cord	BKCD	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
<b>Finish</b>		
Black	BK	
White	WH	
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	

Seem 4 LED Wall Mount	—	FSM4LW
<b>Shielding: Flush Satin Lens</b>	—	<b>FL</b>
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Wall Mount</b>	—	<b>WM</b>
<b>Factory Options</b>		
Emergency Circuit*	EC	
Emergency Battery Pack*	EM	
<b>Finish</b>		
Black	BK	
White	WH	
<b>Length</b>		
Specify luminaire/row length in 1' increments (2' minimum length.)	X'	

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length  
**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length  
**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
 See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 4

DIRECT/INDIRECT & WALL MOUNT



# SEEM 4 LED



Seem 4 Direct/Indirect	—	FSM4BS
<b>Shielding</b>		
Batwing optic top / Batwing lens bottom	BWBW	_____
Batwing optic top / Flush lens bottom	BWFL	_____
Batwing optic top / 0.5" Pop-down bottom	BWPD05	_____
Flush lens top / Batwing lens bottom	FLBW	_____
Flush lens top / Flush lens bottom	FLFL	_____
0.5" Pop-up top / Batwing lens bottom	PUBW	_____
0.5" Pop-up top / Flush lens bottom	PUFL	_____
0.5" Pop-up top / 0.5" Pop-down bottom	PUPD05	_____
<b>Direct Distribution</b>		
<small>(875 Lumens per foot maximum for xxPD05.)</small>		
275 Lumens per foot	275DN	_____
375 Lumens per foot	375DN	_____
625 Lumens per foot	625DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
1125 Lumens per foot	1125DN	_____
1250 Lumens per foot	1250DN	_____
<b>Indirect Distribution</b>		
<small>(1000 Lumens per foot maximum for xxPD05.)</small>		
275 Lumens per foot	275UP	_____
375 Lumens per foot	375UP	_____
625 Lumens per foot	625UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
1125 Lumens per foot	1125UP	_____
1250 Lumens per foot	1250UP	_____
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<small>(Multiple feeds required for 0-10V drivers)</small>		
<b>120/277 UNV Voltage</b>		
—	<b>UNV</b>	_____
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
24" Cable Suspension	C24__	_____
48" Cable Suspension	C48__	_____
96" Cable Suspension	C96__	_____
<small>(Specify canopy color White (WH) or Black (BK). Example: C24WH.)</small>		
<small>(Specify one of the following in place of "C" J - for 2" canopies at non-feed locations. CS - for sloped ceiling applications.)</small>		
<b>Factory Options</b>		
Black Cord	BKCD	_____
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	_____

Seem 4 Direct/Indirect Wall Mount	—	FSM4BW
<b>Shielding</b>		
Flush lens top / Flush lens bottom	FLFL	_____
0.5" Pop-up top / Flush lens bottom	PUFL	_____
0.5" Pop-up top / 0.5" Pop-down bottom	PUPD05	_____
<b>Direct Distribution</b>		
275 Lumens per foot	275DN	_____
375 Lumens per foot	375DN	_____
625 Lumens per foot	625DN	_____
875 Lumens per foot	875DN	_____
1000 Lumens per foot	1000DN	_____
<small>(FLFL &amp; PUFL only.)</small>		
1250 Lumens per foot	1250DN	_____
<small>(FLFL only.)</small>		
<b>Indirect Distribution</b>		
275 Lumens per foot	275UP	_____
375 Lumens per foot	375UP	_____
625 Lumens per foot	625UP	_____
875 Lumens per foot	875UP	_____
1000 Lumens per foot	1000UP	_____
<small>(FLFL &amp; PUFL only.)</small>		
1250 Lumens per foot	1250UP	_____
<small>(FLFL only.)</small>		
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
Single Circuit	1C	_____
Dual Circuit	2C	_____
<small>(Multiple feeds required for 0-10V drivers)</small>		
<b>120/277 UNV Voltage</b>		
—	<b>UNV</b>	_____
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Wall Mount</b>		
—	<b>WM</b>	_____
<b>Factory Options</b>		
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
<b>Finish</b>		
Black	BK	_____
White	WH	_____
<b>Length</b>		
Specify luminaire/row length in 1' increments	X'	_____

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length  
**\*EC & EM:** 8' lengths or longer. 4' illuminated area. See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length  
**\*EC & EM:** 8' lengths or longer. 4' illuminated area. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 4 RECESSED



Seem 4 LED	—	FSM4L
<b>Shielding</b>		
Batwing Lens	BW	
Flush Satin Lens	FL	
Regress Lens	SR	
Regress High Performance Lens	SRXP	
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
1125 Lumens per foot	1125LF	
1250 Lumens per foot	1250LF	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>		
	—	<b>1C</b>
<b>120/277 UNV Voltage</b>		
	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>		
	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	_ft. _in.	<b>ft. in.</b>
<small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>		


## QS QUICKSHIP TERMS

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.



# SEEM 4 LED

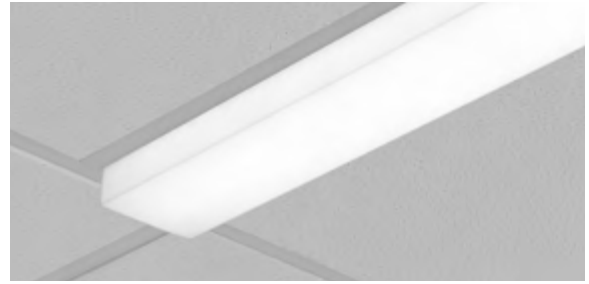

Seem 4 LED	—	FSM4L
<b>Shielding</b>		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Regress Lens	SR	_____
(Ceiling applications only)		
Regress High Performance Lens	SRXP	_____
(Ceiling applications only)		
<b>Lumen Output</b>		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
—	—	<b>1C</b>
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field	XFF	_____
(Mounting equipment assembled in field)		
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
<b>Factory Options</b>		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
<b>Finish: Matte White Housing</b>		
—	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	_ft. _in.	<b>ft. in.</b>
<small>(2' minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>		

Seem 4 LED Pop-down Lens	—	FSM4L
<b>Shielding: 0.5" Pop-down Lens</b>		
<b>Lumen Output</b>		
275 Lumens per foot	275LF	_____
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
750 Lumens per foot	750LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
—	—	<b>1C</b>
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field	XFF	_____
(Mounting equipment assembled in field)		
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
<b>Factory Options</b>		
Chicago Plenum	CP	_____
Emergency Circuit*	EC	_____
Emergency Battery Pack*	EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
<b>Finish: Matte White Housing</b>		
—	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments	X'	_____
<small>(2' minimum length.)</small>		

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length. 48' maximum per pattern section.

**\*EC & EM:** 4' minimum length, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.


# SEEM<sup>®</sup> 4-LP



# SEEM 4-LP LED

<b>Seem 4-LP LED</b>	—	<b>FSM4LP</b>
<b>Shielding: Flush Lens</b>	—	<b>FL</b>
<b>Lumen Output</b>		
275 Lumens per foot	275LF	
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	
Standard 15/16" Tegular	T1	
Standard 9/16" Lay-in	G2	
Standard 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
<b>Factory Options</b>		
Chicago Plenum	CP	
Emergency Circuit*	_EC	
Emergency Battery Pack*	_EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Housing</b>	—	<b>WH</b>
<b>Length</b>		<b>ft. in.</b>
2'		
2' 6"		
3'		
4'		
5'		
6'		
7'		
7' 6"		
8'		

Specify luminaire/row length in 6" increments    \_ft. \_in.  
(8' minimum length)

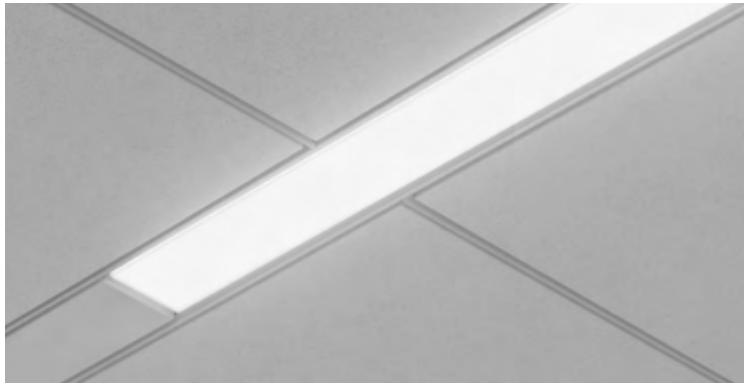

## **QS** QUICKSHIP TERMS

**10 DAY:** 1000' total length


**\*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 6 RECESSED



# SEEM 6 LED

Seem 6 LED	—	FSM6L
<b>Shielding</b>		
Batwing Lens	BW	_____
Flush Satin Lens	FL	_____
Regressed Lens <small>(Ceiling applications only)</small>	SR	_____
Regressed High Performance Lens <small>(Ceiling applications only)</small>	SRXP	_____
<b>Lumen Output</b>		
375 Lumens per foot	375LF	_____
625 Lumens per foot	625LF	_____
875 Lumens per foot	875LF	_____
1000 Lumens per foot	1000LF	_____
1125 Lumens per foot	1125LF	_____
1250 Lumens per foot	1250LF	_____
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	_____
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	_____
4000K, 80+ CRI	40K	_____
<b>Single Circuit</b>		
—	—	<b>1C</b>
<b>120/277 UNV Voltage</b>		
—	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L1	_____
0-10V - 10% Dimming	LD1	_____
<b>Mounting</b>		
Standard 15/16" Lay-in	G1	_____
Standard 15/16" Tegular	T1	_____
Standard 9/16" Lay-in	G2	_____
Standard 9/16" Tegular	T2	_____
9/16" Slot-tee Tegular	G3	_____
Tall 15/16" Lay-in	G4	_____
Tall 15/16" Tegular	T4	_____
Tall 9/16" Lay-in	G5	_____
Tall 9/16" Tegular	T5	_____
Node 9/16" Tegular	T6	_____
Trim Flange Drywall	TF	_____
Trim Flange Wood	TFW	_____
Mud-in Trimless, pre-set for 1/2" Drywall	XF1	_____
Mud-in Trimless, pre-set for 5/8" Drywall	XF2	_____
Mud-in Trimless, set thickness in field <small>(Mounting equipment assembled in field)</small>	XFF	_____
Non-Drywall Hard Surface	XFN	_____
Hard Surface, Wood	XFW	_____
<b>Factory Options</b>		
Chicago Plenum	CP	_____
Emergency Circuit*	_EC	_____
Emergency Battery Pack*	_EM	_____
6' New York City Flex Whip (120V)	FNY1	_____
6' New York City Flex Whip (277V)	FNY2	_____
6' Flex Whip	FW	_____
<b>Finish: Matte White Housing</b>		
—	—	<b>WH</b>
<b>Length</b>		
Specify luminaire/row length in 1" increments <small>(2" minimum length, lengths are nominal, 1" increments based on T-centers. Housing length is 1" shorter than specified.)</small>	__ft. __in.	_____

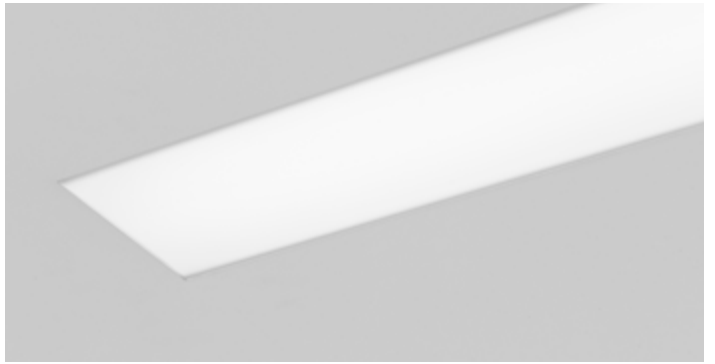

## QS QUICKSHIP TERMS

- 10 DAY:** 1000' total length. 48' maximum per pattern section.
- \*EC & EM:** 4' minimum length, maximum of 3 locations.  
See cut sheet ordering guide for emergency option ordering details.


# SEEM<sup>®</sup> 2

PERIMETER



# SEEM 2 LED PERIMETER

Seem 2 LED Perimeter		—	FSM2PR
<b>Housing Type</b>			
Adjustable Lit Housing <small>(Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)</small>	ALH	_____	
Fixed Housing	FXH	_____	
<b>Shielding</b>			
Flush Lens <small>(Not available with Unlit Sliding Sleeves - SSB)</small>	FL0	_____	
2.5" Regress	FL2	_____	
4.0" Regress	FL4	_____	
2.5" Regress Grazer	GR2	_____	
4.0" Regress Grazer	GR4	_____	
Flush Asymmetric Room Fill <small>(Not available with Unlit Sliding Sleeves - SSB)</small>	AF0	_____	
<b>Lumen Output</b>			
125 Lumens per foot <small>(LD1 &amp; L11 only, 4' minimum.)</small>	125LF	_____	
250 Lumens per foot	250LF	_____	
375 Lumens per foot	375LF	_____	
625 Lumens per foot	625LF	_____	
<b>Color Temperature</b>			
3000K, 80+ CRI	30K	_____	
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____	
4000K, 80+ CRI	40K	_____	
<b>Circuit - Single Circuit</b>		—	<b>1C</b>
<b>Voltage - 120/277 UNV Volt</b>		—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>			
0-10V - 10% Dimming	LD1	_____	
0-10V - 1% Dimming	L11	_____	
<b>Mounting</b>			
Lay-in Grid	G	_____	
Flush (FL0 & AF0)	Slot Tee / Tegular Trim Flange Drywall	ST TF	_____
	Mud-in Trimless Drywall	XFF	_____
Regressed (FL2, FL4, GR2 & GR4)	Grid Trimless Drywall	G XF	_____
<b>Factory Options</b>			
Chicago Plenum <small>(Not available with Flex Whip)</small>	CP	_____	
Emergency Circuit*	_EC	_____	
Emergency Battery Pack*	_EM	_____	
6' New York City Flex Whip (120V)	FNY1	_____	
6' New York City Flex Whip (277V)	FNY2	_____	
6' Flex Whip	FW	_____	
Fixed Housing with Unlit Sliding Sleeves <small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2, FL4, GR2 &amp; GR4 only. 3' minimum luminaire length.)</small>	SSB	_____	
<b>Finish - Matte White Housing</b>		—	<b>WH</b>
<b>Luminaire Length</b>			
Specify luminaire/row length in 1" increments <small>(2' minimum length)</small>	_ft_in	_____	<b>ft in</b>

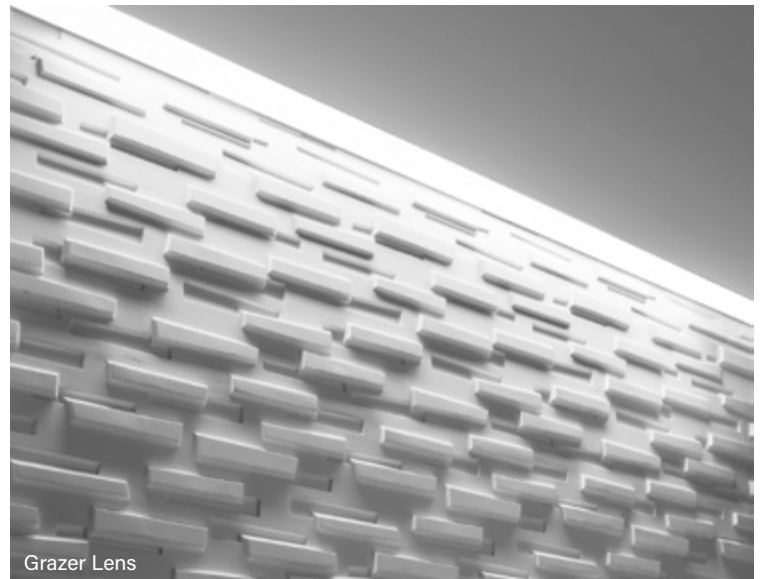


**QS QUICKSHIP TERMS**

**10 DAY:** 1000' total length

**\*EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# SEEM<sup>®</sup> 4 PERIMETER

You More.






# SEEM 4 LED PERIMETER

Seem 4 LED Perimeter		—	FSM4PR
<b>Housing Type</b>			
Adjustable Lit Housing <small>(Allows for +/- 3" adjustment to overall run length. 3' minimum luminaire length.)</small>	ALH	_____	
Fixed Housing	FXH	_____	
<b>Shielding</b>			
Flush Lens*	FL0	_____	
2.5" Regress	FL2	_____	
4.0" Regress	FL4	_____	
Flush Grazer*	GR0	_____	
2.5" Regress Grazer	GR2	_____	
4.0" Regress Grazer	GR4	_____	
Flush Asymmetric Room Fill* <small>*(Not available with Unlit Sliding Sleeves - SSB)</small>	AF0	_____	
<b>Lumen Output</b>			
275 Lumens per foot	275LF	_____	
375 Lumens per foot	375LF	_____	
625 Lumens per foot	625LF	_____	
875 Lumens per foot	875LF	_____	
1000 Lumens per foot	1000LF	_____	
<b>Color Temperature</b>			
3000K, 80+ CRI	30K	_____	
3500K, 80+ CRI or 90+ CRI	35K or 935K	_____	
4000K, 80+ CRI	40K	_____	
<b>Circuit - Single Circuit</b>		—	<b>1C</b>
<b>Voltage - 120/277 UNV Volt</b>		—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>			
0-10V - 10% Dimming	LD1	_____	
0-10V - 1% Dimming	L11	_____	
<b>Mounting</b>			
Lay-in Grid	G	_____	
Flush (FL0, GR0 & AF0)	Slot Tee / Tegular Trim Flange Drywall Mud-in Trimless Drywall	ST TF XFF	_____
Regressed (FL2, FL4, GR2 & GR4)	Grid Trimless Drywall	G XF	_____
<b>Factory Options</b>			
Chicago Plenum	CP	_____	
Emergency Circuit*	_EC	_____	
Emergency Battery Pack*	_EM	_____	
6' New York City Flex Whip (120V)	FNY1	_____	
6' New York City Flex Whip (277V)	FNY2	_____	
6' Flex Whip	FW	_____	
Fixed Housing with Unlit Sliding Sleeves <small>(Set of two unlit 12" sleeves. Fixed housing in straight runs only. FL2, FL4, GR2 &amp; GR4 only. 3' minimum luminaire length.)</small>	SSB	_____	
<b>Finish - Matte White Housing</b>		—	<b>WH</b>
<b>Luminaire Length</b>			
Specify luminaire/row length in 1" increments <small>(2' minimum length)</small>	_ft_in	_____	<b>ft in</b>



Standard Lens

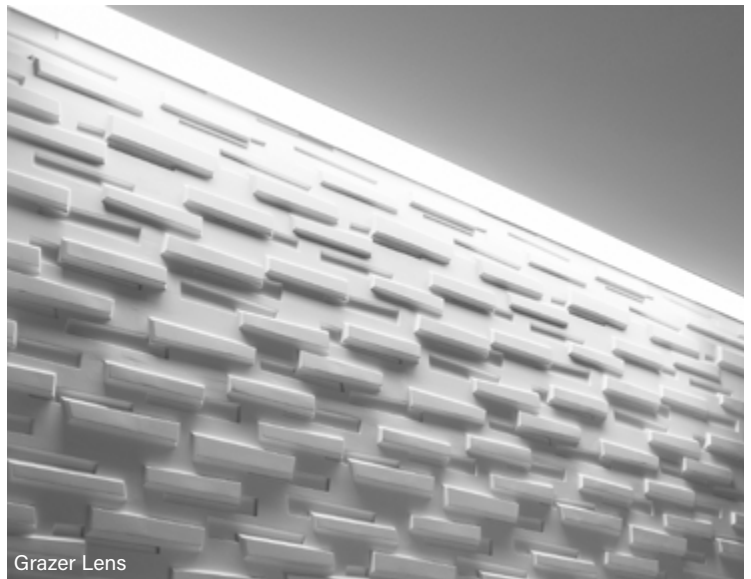

Grazer Lens

## **QS** QUICKSHIP TERMS

**10 DAY:** 1000' total length


**\*EC & EM:** 4' minimum length, not available at corners, maximum of 3 locations. See cut sheet ordering guide for emergency option ordering details.

# COVERT LITE®



# COVERT LITE

<b>Covert Lite</b>	—	<b>FCOLT</b>
<b>Profile: Horizontal Fixed</b>	—	<b>HF</b>
<b>Lumen Output</b>		
500 Lumen	500L	
750 Lumen	750L	
1000 Lumen	1000L	
1200 Lumens	1200L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting: Cove</b>	—	<b>CV</b>
<b>Factory Options</b>		
Emergency Circuit <small>(See EC Guide for default locations and ordering details.)</small>	_EC	
<b>Finish: No Finish</b>	—	<b>NF</b>
<b>Length</b>		
Specify luminaire/row length in 1' increments <small>(2' minimum length. Each feed location increases overall luminaire length by 1')</small>	X'	

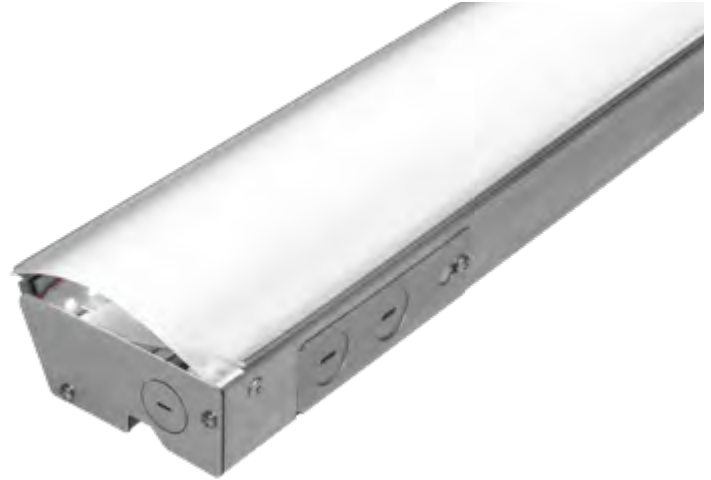


**QS QUICKSHIP TERMS**

**10 DAY:** 400' total length

# AERION<sup>®</sup> LED



# AERION LED

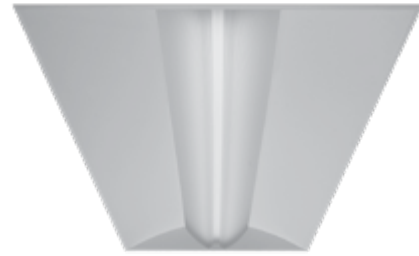

	<b>Aerion LED</b>	—	<b>FARL</b>
	<b>Nominal Size: 2' x 2'</b>	—	<b>22</b>
	<b>Shielding: Acrylic Diffuser</b>	—	<b>AC</b>
	<b>Lumen Output</b>		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>Voltage</b>		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	<b>Mounting</b>		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte Satin White</b>	—	<b>WH</b>

	<b>Aerion LED</b>	—	<b>FARL</b>
	<b>Nominal Size: 2' x 4'</b>	—	<b>24</b>
	<b>Shielding: Acrylic Diffuser</b>	—	<b>AC</b>
	<b>Lumen Output</b>		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	4000 Lumens	4000LH	
High Efficiency	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>Voltage</b>		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming	LD1	
	<b>Mounting</b>		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte Satin White</b>	—	<b>WH</b>

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less



**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

# AMICA<sup>®</sup> 2



# AMICA 2

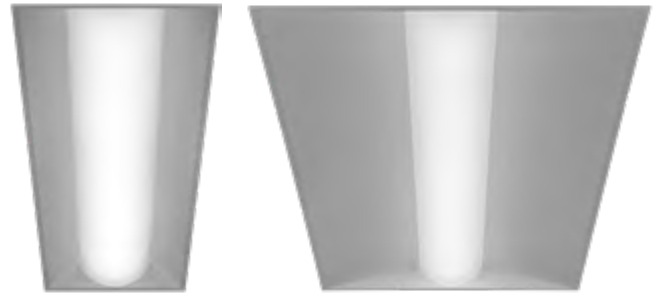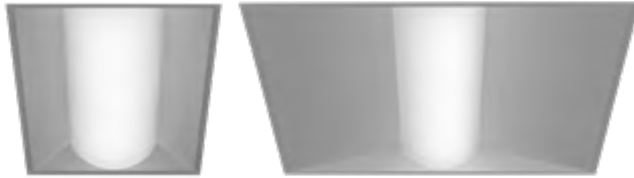

Amica 2		—	FAM2
<b>Nominal Size</b>			
	1' x 2'	12	
	2' x 2'	22	
<b>Shielding: Ribbed Acrylic Diffuser</b>		—	<b>ACR</b>
<b>Lumen Output</b>			
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	3500 Lumens	3500L	
	4000 Lumens	4000L	
High Efficiency	2000 Lumens	2000LH	
	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
<b>Color Temperature</b>			
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	—	—	<b>1C</b>
	—	—	<b>UNV</b>
<b>Single Circuit</b>			
<b>120/277 UNV Voltage</b>		—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>			
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>			
	Grid	G	
	Drywall Frame Kit	F	
<b>Factory Options</b>			
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	—	—	<b>WH</b>

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

Amica 2		—	FAM2
<b>Nominal Size</b>			
	1' x 4'	14	
	2' x 4'	24	
<b>Shielding: Ribbed Acrylic Diffuser</b>		—	<b>ACR</b>
<b>Lumen Output</b>			
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	6000 Lumens	6000L	
	6500 Lumens	6500L	
	7000 Lumens	7000L	
High Efficiency	7500 Lumens	7500L	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	6500 Lumens	6500LH	
	7000 Lumens	7000LH	
	7500 Lumens	7500LH	
	8000 Lumens	8000LH	
<b>Color Temperature</b>			
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	—	—	<b>1C</b>
	—	—	<b>UNV</b>
<b>Single Circuit</b>			
<b>120/277 UNV Voltage</b>		—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>			
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>			
	Grid	G	
	Drywall Frame Kit	F	
<b>Factory Options</b>			
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	—	—	<b>WH</b>


**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

# AMICA<sup>®</sup> LED





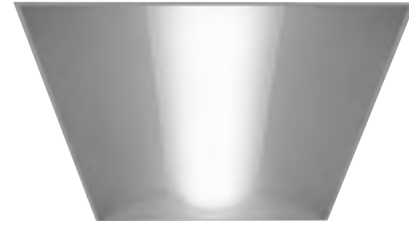

	Amica LED		FAML
	<b>Nominal Size: 2' x 2'</b>	—	<b>22</b>
	<b>Shielding: Ribbed Acrylic Diffuser</b>	—	<b>ACR</b>
	<b>Lumen Output</b>		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>Voltage</b>		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	<b>Dimming Level: 0-10V - 10% Dimming</b>	—	<b>LD1</b>
	<b>Mounting</b>		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte White Finish</b>	—	<b>WH</b>

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

	Amica LED		FAML
	<b>Nominal Size: 2' x 4'</b>	—	<b>24</b>
	<b>Shielding: Ribbed Acrylic Diffuser</b>	—	<b>ACR</b>
	<b>Lumen Output</b>		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
	4000 Lumens	4000LH	
High Efficiency	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>Voltage</b>		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	<b>Dimming Level: 0-10V - 10% Dimming</b>	—	<b>LD1</b>
	<b>Mounting</b>		
	15/16" Grid	G1	
	9/16" Grid	G2	
	9/16" Slot Tee	G3	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte White Finish</b>	—	<b>WH</b>

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

# EQUATION<sup>®</sup> 2



<b>Equation 2</b>	—	<b>FEQ2</b>
<b>Nominal Size: 1' x 4'</b>	—	<b>14</b>
<b>Shielding</b>		
Opal Acrylic Lens	AC	
MicroGlow Prismatic Lens	MG	
<b>Lumen Output</b>		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>		
15/16" Grid	G1	
9/16" Grid	G2	
Slot Tee	ST	
Drywall Frame Kit	F	
Surface Mount	SM	
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
<b>Factory Options</b>		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FNY1	
6' New York City Flex Whip (277V)	FNY2	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

## **QS** QUICKSHIP TERMS

**5 DAY:** 50 pieces or less

**10 DAY:** 150 pieces or less

# EQUATION 2



<b>Equation 2</b>		—	<b>FEQ2</b>
<b>Nominal Size: 2' x 2'</b>		—	<b>22</b>
<b>Shielding</b>			
	Opal Acrylic Lens	AC	
	MicroGlow Prismatic Lens	MG	
<b>Lumen Output</b>			
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
	3500 Lumens	3500L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
<b>Color Temperature</b>			
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI	40K	
<b>Single Circuit</b>		—	<b>1C</b>
<b>120/277 UNV Voltage</b>		—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>			
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>			
	15/16" Grid	G1	
	9/16" Grid	G2	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	Surface Mount	SM	
	24" Aircraft Cable	C24	
	48" Aircraft Cable	C48	
	96" Aircraft Cable	C96	
<b>Factory Options</b>			
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' New York City Flex Whip (120V)	FNY1	
	6' New York City Flex Whip (277V)	FNY2	
	6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>		—	<b>WH</b>

<b>Equation 2</b>		—	<b>FEQ2</b>
<b>Nominal Size: 2' x 4'</b>		—	<b>24</b>
<b>Shielding</b>			
	Opal Acrylic Lens	AC	
	MicroGlow Prismatic Lens	MG	
<b>Lumen Output</b>			
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
High Efficiency	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	6500 Lumens	6500LH	
	7000 Lumens	7000LH	
	7500 Lumens	7500LH	
	8000 Lumens	8000LH	
	8500 Lumens	8500LH	
<b>Color Temperature</b>			
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
	4000K, 80+ CRI	40K	
<b>Single Circuit</b>		—	<b>1C</b>
<b>120/277 UNV Voltage</b>		—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>			
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming <small>(Not Right Light as standard, consult factory)</small>	LD1	
<b>Mounting</b>			
	15/16" Grid	G1	
	9/16" Grid	G2	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	Surface Mount	SM	
	24" Aircraft Cable	C24	
	48" Aircraft Cable	C48	
	96" Aircraft Cable	C96	
<b>Factory Options</b>			
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' New York City Flex Whip (120V)	FNY1	
	6' New York City Flex Whip (277V)	FNY2	
	6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>		—	<b>WH</b>

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

# LUNA<sup>®</sup> LED





Luna LED	—	FLUL
<b>Nominal Size: 2' x 2'</b>	—	<b>22</b>
<b>Shielding: Perforated Shield</b>	—	<b>PS</b>
<b>Lumen Output</b>		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens (LD1 & L11 only.)	4000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
<b>Factory Options</b>		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery	B310	
Positional Clips	EQ	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

Luna LED	—	FLUL
<b>Nominal Size: 2' x 4'</b>	—	<b>24</b>
<b>Shielding: Perforated Shield</b>	—	<b>PS</b>
<b>Lumen Output</b>		
3000 Lumens*	3000L	
3500 Lumens*	3500L	
4000 Lumens	4000L	
4500 Lumens	4500L	
5000 Lumens	5000L	
5500 Lumens	5500L	
6000 Lumens*	6000L	
6500 Lumens*	6500L	
7000 Lumens* (*LD1 & L11 only.)	7000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI <b>or</b> 90+ CRI	35K <b>or</b> 935K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>120/277 UNV Voltage</b>	—	<b>UNV</b>
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
<b>Mounting</b>		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
<b>Factory Options</b>		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery	B310	
Positional Clips	EQ	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

**QS QUICKSHIP TERMS**

**5 DAY:** 100 pieces or less  
**10 DAY:** 300 pieces or less

# VEER<sup>®</sup> LED



<b>Veer LED</b>	—	<b>FVRL</b>
<b>Nominal Size: 1' x 4'</b>	—	<b>14</b>
<b>Shielding</b>		
Radial Acrylic Diffuser	ACR	
Flat Acrylic Diffuser	ACF	
Regress Acrylic Diffuser	ACG	
<b>Lumen Output</b>		
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
<b>Color Temperature</b>		
3000K, 80+ CRI	30K	
3500K, 80+ CRI	35K	
4000K, 80+ CRI	40K	
<b>Single Circuit</b>	—	<b>1C</b>
<b>Voltage</b>		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
<b>Control System &amp; Dimming Level</b>		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
<b>Mounting</b>		
Grid	G	
Slot Tee	ST	
Drywall Frame Kit	F	
<b>Factory Options</b>		
Air Return	AR	
Chicago Plenum	CP	
Emergency Battery Pack with Integral Test Switch	EM	
6' Flex Whip	FW	
<b>Finish: Matte White Finish</b>	—	<b>WH</b>

**QS** QUICKSHIP TERMS

**10 DAY:** 50 pieces or less





	<b>Veer LED</b>	—	<b>FVRL</b>
	<b>Nominal Size: 2' x 2'</b>	—	<b>22</b>
	<b>Shielding</b>		
	Radial Acrylic Diffuser	ACR	
	Flat Acrylic Diffuser	ACF	
	Regress Acrylic Diffuser	ACG	
	<b>Lumen Output</b>		
Standard	2000 Lumens	2000L	
	2500 Lumens	2500L	
	3000 Lumens	3000L	
High Efficiency	2500 Lumens	2500LH	
	3000 Lumens	3000LH	
	3500 Lumens	3500LH	
	4000 Lumens	4000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>Voltage</b>		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
	<b>Mounting</b>		
	Grid	G	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte White Finish</b>	—	<b>WH</b>

**QS QUICKSHIP TERMS**

**10 DAY:** 100 pieces or less

	<b>Veer LED</b>	—	<b>FVRL</b>
	<b>Nominal Size: 2' x 4'</b>	—	<b>24</b>
	<b>Shielding</b>		
	Radial Acrylic Diffuser	ACR	
	Flat Acrylic Diffuser	ACF	
	Regress Acrylic Diffuser	ACG	
	<b>Lumen Output</b>		
Standard	4000 Lumens	4000L	
	4500 Lumens	4500L	
	5000 Lumens	5000L	
	5500 Lumens	5500L	
High Efficiency	4000 Lumens	4000LH	
	4500 Lumens	4500LH	
	5000 Lumens	5000LH	
	5500 Lumens	5500LH	
	6000 Lumens	6000LH	
	<b>Color Temperature</b>		
	3000K, 80+ CRI	30K	
	3500K, 80+ CRI	35K	
	4000K, 80+ CRI	40K	
	<b>Single Circuit</b>	—	<b>1C</b>
	<b>Voltage</b>		
	120 Volt	120	
	277 Volt	277	
	UNV Volt	UNV	
	<b>Control System &amp; Dimming Level</b>		
	0-10V - 1% Dimming	L11	
	0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
	<b>Mounting</b>		
	Grid	G	
	Slot Tee	ST	
	Drywall Frame Kit	F	
	<b>Factory Options</b>		
	Air Return	AR	
	Chicago Plenum	CP	
	Emergency Battery Pack with Integral Test Switch	EM	
	6' Flex Whip	FW	
	<b>Finish: Matte White Finish</b>	—	<b>WH</b>


**QS QUICKSHIP TERMS**

**10 DAY:** 100 pieces or less



# Quickship Guide

5 & 10 Day Configurations



**FOCAL POINT®**

Bringing It All To Light®

