



FOCAL POINT®

SKYDOME LED

2', 3' & 4' RECESSED, SUSPENDED & SURFACE MOUNT

SKYDOME LED

Simplicity of shape. Versatile style. A family of classic, eye-pleasing illuminated circles now available in LED. Span 2', 3' and 4' diameters with round recessed, surface mounted and suspended LED luminaires. Enjoy the beautifully even appearance and low maintenance fluorescent could not achieve.

LED SYSTEM

- Right Light™ standard outputs
- 3000K, 3500K, 4000K
- CRI > 80
- Selection of dimming drivers including 0-10V and Lutron
- L70 at 76,000 hours*
- 5 year limited warranty

NEW COLORS*

-  Bay Blue
-  Fabulous Fuchsia
-  Golf Green
-  Modest Mushroom
-  Titanium Silver
-  Matte & Gloss White
-  Matte Black

*Colors standard on Pendant & Surface Mount options. Consult factory for custom colors.

*Calculated: L70 at 76,000hours. Reported: L70 at >54,000 hours. Derived from EPA TM-21 calculator

SKYDOME AT WORK

Make a statement while creating comfortable and productive work environments. Conference rooms and meeting spaces are elevated with Skydome LED's smooth and even appearance. Combine 2', 3' and 4' Skydome diameters to illustrate and invigorate lounges, passageways and other specialty areas.



Photo: Vade Environment, Chicago, IL, Architect: OMMF, Cannon Design, Photography: Christopher Barrett (this page), Thomas Hlavac, Chicago, IL, (Top) Concord Maco Group, Los Angeles, CA, Architect: MCDU, Photography: Barry Chen, (Bottom Left) Karel Johnson, Denver, IL, Architect: Perkins + Will, Photography: Craig Dugan, Heidi Bess

SCHOOLS LOVE SKYDOME

Skydome LED's circular presence imparts an upscale feeling into corridors and common areas, while the durable design offers low maintenance longevity. Suspended and surface mounted versions finished to match school colors provide a spirited connection to the space.




Credits: Rachel Carson Elementary, Richmond, VA, Architect: Regus Architects Photography: Lara Swimmer (This page), Thompson Elementary School, Arlington, VA, Architect: HPHH, Photography: Ed Worsley, ANKWORKS Inc. (Top), DuWai University, Downs Grove, IL, Architect: VOA Associates, Photography: Steve Hill, Hedrick Bessing (Bottom left), University of Delaware Bookstore, Newark, DE, Architect: Dgsau, Photography: Helen Photography.

SKYDOME SUPPORTS HEALING


Skydome LED's glowing look and soft edges contribute to beautiful and calming environments. Fully enclosed and gasketed construction allows for easy cleaning. Long-life LEDs reduce the need to open and maintain the luminaire over the life of the installation.



SUSPENDED DETAILS

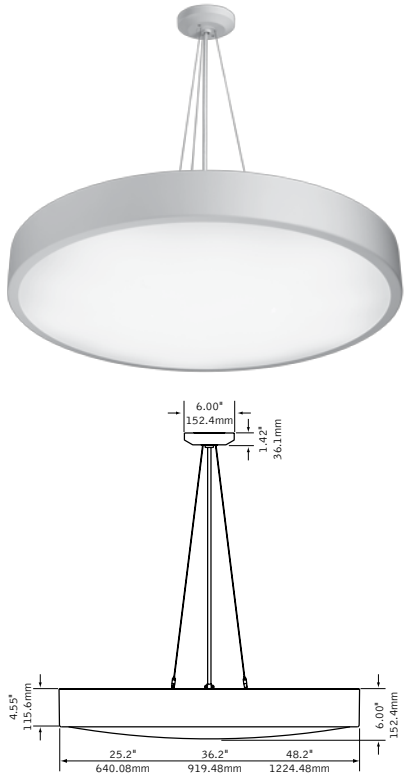

SURFACE MOUNT DETAILS

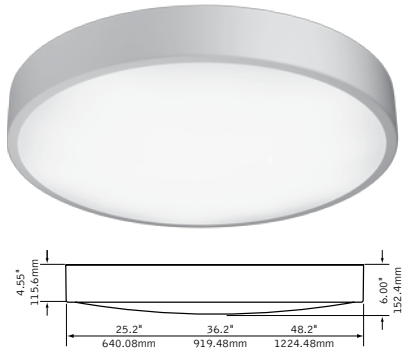

COLORS*



*Colors standard on Pendant & Surface Mount options. Consult factory for custom colors.


SUSPENDED ORDERING

Luminaire Series		FSDL
Skydome LED		FSDL
Nominal Size		
2' Diameter	22	
3' Diameter	33	
4' Diameter	44	
Shielding		CX
Frosted Lens		CX
Lumen Output		
2' Diameter		
2000 Lumen	2000L	
3000 Lumen	3000L	
4000 Lumen	4000L	
3' Diameter		
4000 Lumen	4000L	
5000 Lumen	5000L	
7000 Lumen	7000L	
9000 Lumen	9000L	
4' Diameter		
7000 Lumen	7000L	
9000 Lumen	9000L	
11,000 Lumen	11000L	
14,000 Lumen	14000L	
17,000 Lumen	17000L	
Color Temperature		
3000K	30K	
3500K	35K	
4000K	40K	
Circuit		1C
Single Circuit		1C
Voltage		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
<small>(Cannot be specified with EM option)</small>		
Driver		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Lutron A-Series	L3D	
1% EcoSystem Digital		
<small>(Consult factory for 3-wire control)</small>		
Mounting		
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
6" Rigid Stem	S6	
12" Rigid Stem	S12	
18" Rigid Stem	S18	
24" Rigid Stem	S24	
36" Rigid Stem	S36	
48" Rigid Stem	S48	
<small>(White stems and canopies supplied standard. For non-white housings: to match stem and housing color, add M to ordering code (S12M). To match stem, canopy and housing color, add MC to ordering code (S12MC) (Consult factory for other lengths)</small>		
Factory Options		
Emergency Battery	EM	
Solid Top Cover Plate	TC	
<small>(Painted to match housing)</small>		
Finish		
Matte Satin White	WH	
Gloss White	HW	
Titanium Silver	TS	
Matte Black	BK	
Bay Blue - Gloss	BB	
Fabulous Fuschia - Gloss	FF	
Golf Green - Gloss	GG	
Modest Mushroom - Gloss	MM	

SURFACE MOUNT ORDERING


Luminaire Series		FSDL
Skydome LED		FSDL
Nominal Size		
2' Diameter	22	
3' Diameter	33	
4' Diameter	44	
Shielding		CX
Frosted Lens		CX
Lumen Output		
2' Diameter		
2000 Lumen	2000L	
3000 Lumen	3000L	
4000 Lumen	4000L	
3' Diameter		
4000 Lumen	4000L	
5000 Lumen	5000L	
7000 Lumen	7000L	
9000 Lumen	9000L	
4' Diameter		
7000 Lumen	7000L	
9000 Lumen	9000L	
11,000 Lumen	11000L	
14,000 Lumen	14000L	
17,000 Lumen	17000L	
Color Temperature		
3000K	30K	
3500K	35K	
4000K	40K	
Circuit		1C
Single Circuit		1C
Voltage		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
Driver		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Lutron A-Series	L3D	
1% EcoSystem Digital		
<small>(Consult factory for 3-wire control)</small>		
Mounting		SM
Surface Mount		SM
Finish		
Matte Satin White	WH	
Gloss White	HW	
Titanium Silver	TS	
Matte Black	BK	
Bay Blue - Gloss	BB	
Fabulous Fuschia - Gloss	FF	
Golf Green - Gloss	GG	
Modest Mushroom - Gloss	MM	

RECESSED DETAILS

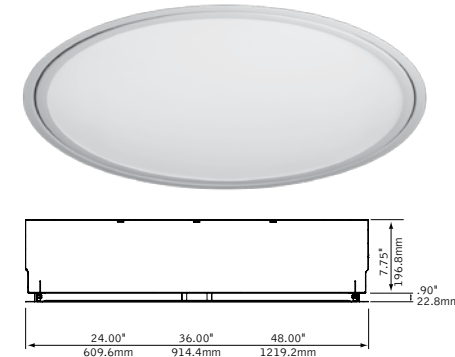


RECESSED ORDERING

Luminaire Series		FSDL
Skydome LED		FSDL
Nominal Size		
1' Diameter	11	
2' Diameter	22	
3' Diameter	33	
4' Diameter	44	
Shielding		FLXP
Flat Frosted Diffuser		FLXP
High Performance Flat Lens		FLXP
<small>(1' diameter only)</small>		
Lumen Output		
1' Diameter		
1000 Lumen	1000L	
1500 Lumen	1500L	
2' Diameter		
2000 Lumen	2000L	
3000 Lumen	3000L	
4000 Lumen	4000L	
3' Diameter		
4000 Lumen	4000L	
5000 Lumen	5000L	
7000 Lumen	7000L	
9000 Lumen	9000L	
4' Diameter		
7000 Lumen	7000L	
9000 Lumen	9000L	
11,000 Lumen	11000L	
14,000 Lumen	14000L	
17,000 Lumen	17000L	
Color Temperature		
3000K	30K	
3500K	35K	
4000K	40K	
Circuit		1C
Single Circuit		1C
Voltage		
120 Volt	120	
277 Volt	277	
UNV Volt	UNV	
<small>(Cannot be specified with EM option)</small>		
Driver		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	LL1	
Lutron A-Series	L3D	
1% EcoSystem Digital		
<small>(Consult factory for 3-wire control)</small>		
UNV 120/277 Volt	UNV	
<small>(1' diameter only)</small>		
Mounting		U
Universal		U
Factory Options		
Bar Hangers	BH	
<small>(1' diameter only)</small>		
Chicago Plenum	CP	
Emergency Battery	EM	
6' New York City Flex Whip	FNY	
6' Flex Whip	FW	
Finish		WH
Matte Satin White		WH

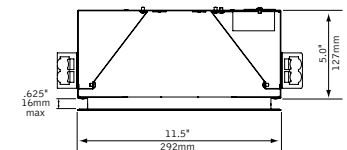



RIGHT LIGHT™

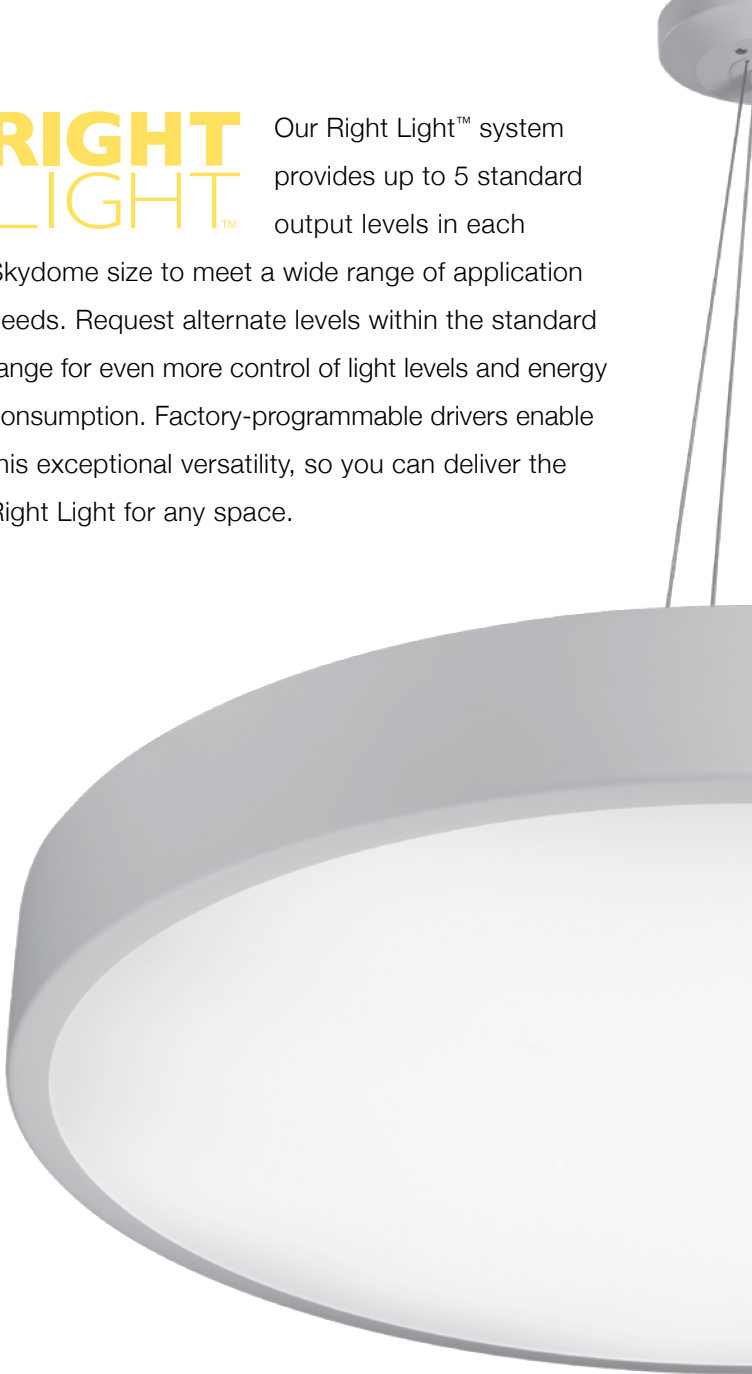

Our Right Light™ system provides up to 5 standard output levels in each

Skydome size to meet a wide range of application needs. Request alternate levels within the standard range for even more control of light levels and energy consumption. Factory-programmable drivers enable this exceptional versatility, so you can deliver the Right Light for any space.

T H E
A R T O F
L I G H T™



Follow @focalpointlight

Application images depict Skydome fluorescent, not actual Skydome LED.

©2015 Focal Point, LLC. 4141 S. Pulaski Road, Chicago, IL 60632 T 773.247.9494 | www.focalpointlights.com
All rights reserved. "Focal Point", "The Art of Light", "Right Light" and the light-ray graphic are trademarks or registered trademarks of Focal Point, LLC. Visit www.focalpointlights.com for details on our entire catalog.

9/15 MKT#1113