

Ori™ Acoustic Tile

AUO



BEFORE YOU BEGIN

- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.


INSTRUCTION KEY




ATTENTION

COMPONENT KEY

FOCAL POINT

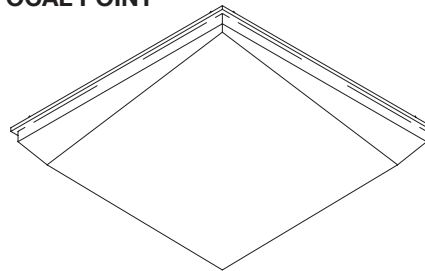



Standard Assembly

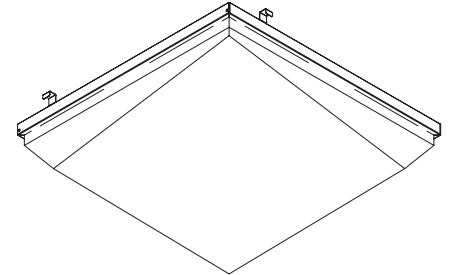



Plenum/Chicago Plenum Assembly

PROFILE KEY



SIMPLE SLOPE 1 (SS1)





SIMPLE SLOPE 2 (SS2)





DYNAMIC SLOPE 1 (DS1)






DYNAMIC SLOPE 2 (DS2)






VALLEY 1 (VY1)





VALLEY 2 (VY2)






PLATEAU 1 (PT1)





PLATEAU 2 (PT2)



PEAK 1 (PK1)



PLAIN (PLN)






ORI ACOUSTIC TILE
DO NOT apply any weight on or suspend objects from tile.




STANDARD INSTALLATION

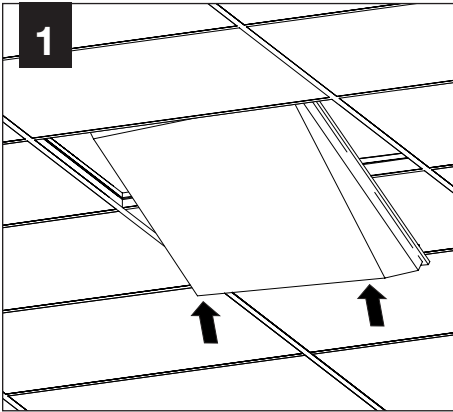

ORI ACOUSTIC TILE - PLAIN AUO-22-PLN

To integrate with sprinkler heads, downlights or other ceiling objects, it is recommended to **only cut PLAIN (PLN) acoustic tiles**, using a utility knife with fresh blade and a steady hand.

DO NOT apply any weight on or suspend objects from tile.



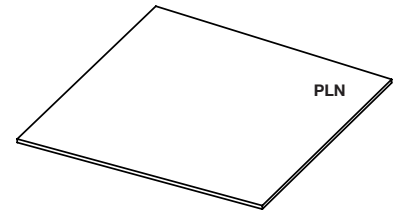


**UTILITY KNIFE WITH
FRESH BLADE**



STEADY HAND

PLENUM/CHICAGO PLENUM INSTALLATION

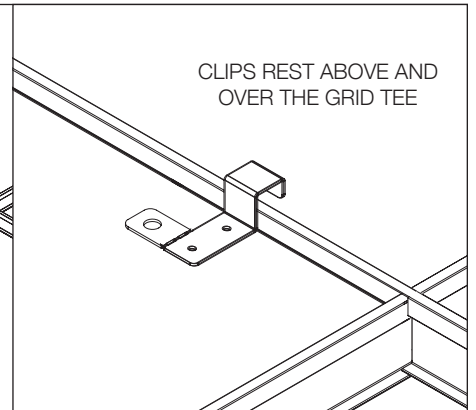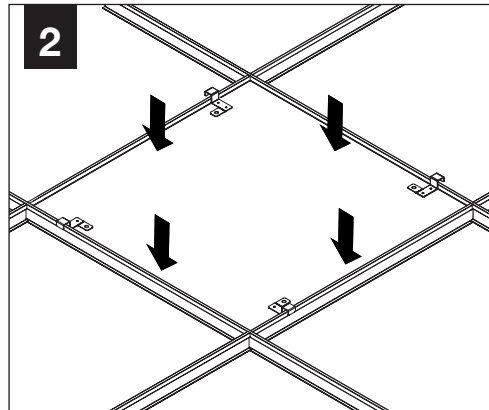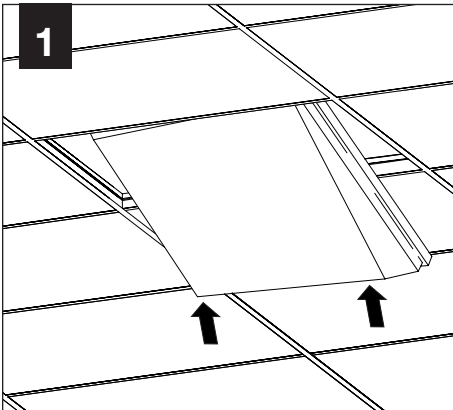

SECURE TO STRUCTURE ABOVE [OPTIONAL]

