# Ori® Acoustic Tile

AUO



FOCAL POINT



#### **BEFORE YOU BEGIN**


- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC.
  Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

#### **INSTRUCTION KEY**



**ATTENTION** 

#### **COMPONENT KEY**

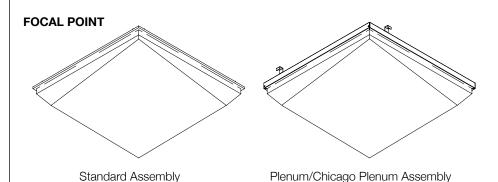

#### **PROFILE KEY**

SIMPLE SLOPE 1 (SS1)

5.0"




SIMPLE SLOPE 2 (SS2)



5.0




DYNAMIC SLOPE 1 (DS1)



5.0"



DYNAMIC SLOPE 2 (DS2)








VALLEY 1 (VY1)








VALLEY 2 (VY2)



5.0"




PLATEAU 1 (PT1)







PLATEAU 2 (PT2)








PEAK 1 (PK1)







PLAIN (PLN)








#### **ORI ACOUSTIC TILE**

**DO NOT** apply any weight on or suspend objects from tile.



### STANDARD INSTALLATION





## **ORI ACOUSTIC TILE - PLAIN** AUO-22-PLN

To integrate with sprinkler heads, downlights or other ceiling objects, it is recommended to **only cut PLAIN (PLN) acoustic tiles,** using a utility knife with fresh blade and a steady hand.

**DO NOT** apply any weight on or suspend objects from tile.



### PLENUM/CHICAGO PLENUM INSTALLATION

