



# Seem® 2 Acoustic


UNLIT



90° corner detail

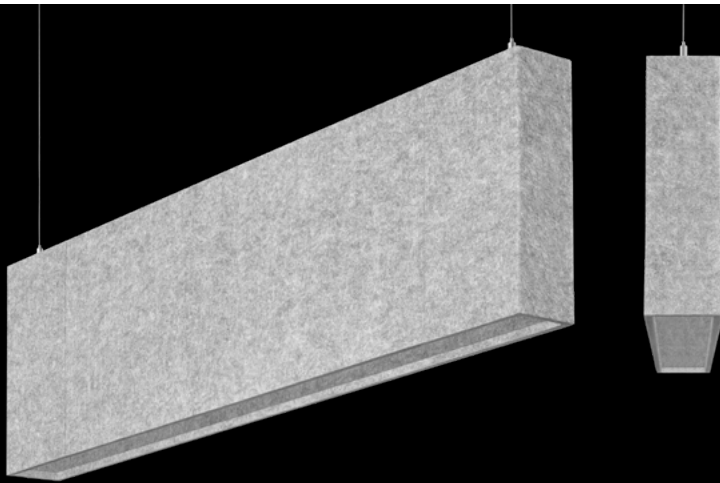


'L' pattern



AirCore Blade companion




The Naturals collection -  
Direct companion in Chestnut shown



TruBlade companion

## DIMENSIONAL DATA

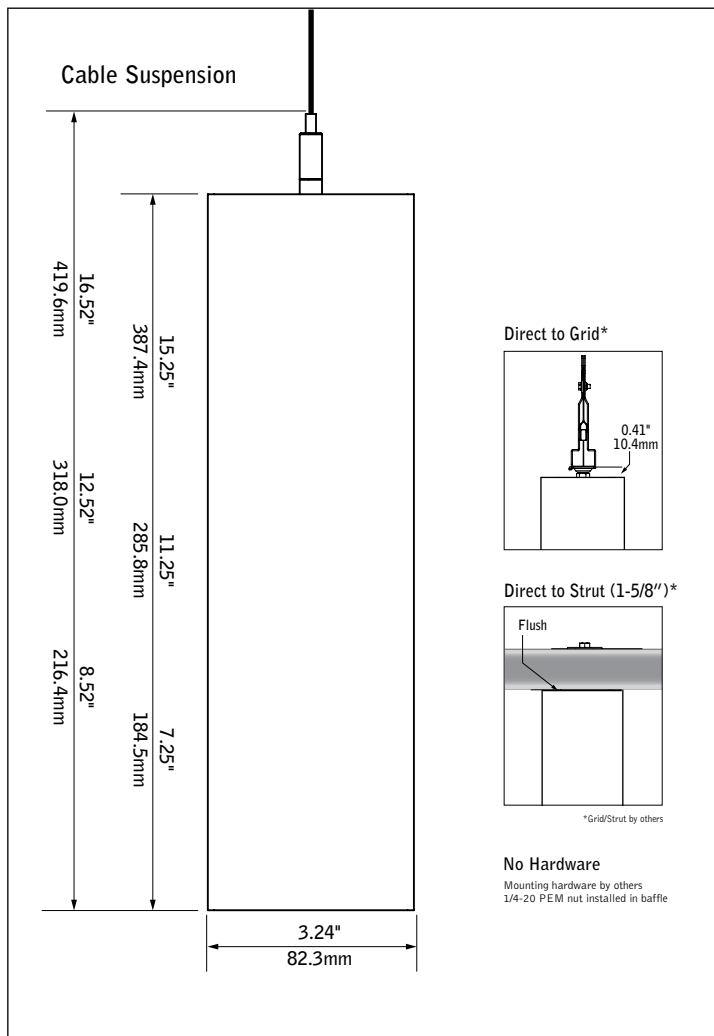

## FEATURES

Sound absorbing unlit acoustic baffle.

Available in 2' to 208' lengths in 1" increments with 8", 12", or 16" nominal housing heights in straight lengths or patterns with 90° corners.

AirCore® Technology: patented, eco-friendly technology that maximizes sound absorption and reduces ecological impact.


Eco-friendly acoustic material available in a variety of colors.

Wide range of color options provides design flexibility and personalization for any project.

Pair with Seem 2 Acoustic luminaires or Seem 2 Acoustic Trio to create a coordinated look in interior spaces.


Available with The Naturals, a series of finishes that exude biophilic beauty.

## ACOUSTIC PERFORMANCE

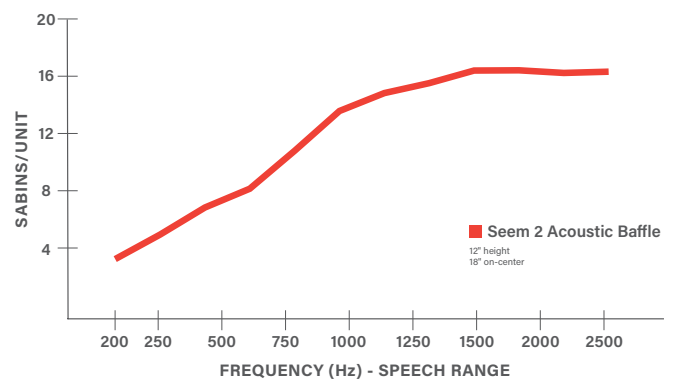

All products were tested in multiple configured arrays. Total absorption will vary based on configuration. Please refer to ASTM C423 reports for more information.

PATTERN DETAILS

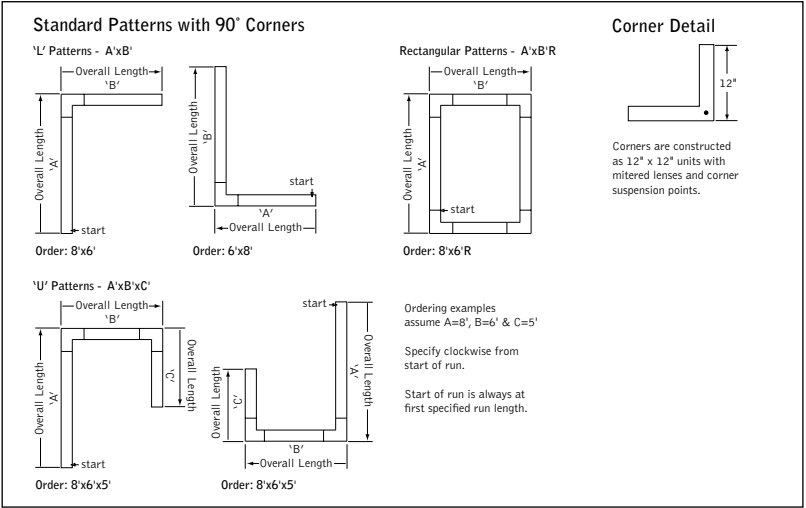

SPECIFICATIONS  
Acoustic Material

Content	Housing material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant.  See page 3 for color offering. Acoustic material colors are subject to change without notice. For the most current color options, please visit <a href="http://focalpointlights.com/acousticsolutions">focalpointlights.com/acousticsolutions</a> . Lead times may vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from [focalpointlights.com](http://focalpointlights.com). Contact [acoustic.solutions@focalpointlights.com](mailto:acoustic.solutions@focalpointlights.com) for technical questions.

Sabins	Sabins is a unit of sound absorption. It measures how well one square foot of material absorbs sound. Focal Point has averaged the Sabins per unit at four specific frequency bands representing the human speech range (250, 500, 1000, 2000 Hz) to determine the Sabins per product.  8' length, 12" height: 12" OC = 10.26 Sabins 18" OC = 11.67 Sabins 24" OC = 12.43 Sabins
--------	---

Labels

Suitable for Dry Locations, indoor use only.

Weight

12" height, 4' length = 14.1lbs

Canopy (suspended mounting only)

Polyester powder coat applied over a multi-stage pre-treatment. Canopy white as standard.

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.

ORDERING

<b>Baffle Series</b>	<b>AUSM2S</b>
Seem 2 Acoustic Unlit	AUSM2S
<b>Shielding</b>	<b>SD</b>
Solid Bottom	SD
<b>Baffle Height</b> (heights are nominal)	
8"	8
12"	12
16"	16

Mounting

Suspended

(Mounting hang kits ship with order)

24" Cable Suspension	J24
48" Cable Suspension	J48
96" Cable Suspension	J96
120" Cable Suspension	J120

(Specify canopy color White (WH), Black (BK) or Titanium Silver (TS). Example: J24WHL)  
(Consult factory for sloped ceiling applications)

Surface Mounted

Direct/Flush to Grid	DTG
Direct/Flush to Strut	DTS

Hardware by others

(Mounting hardware provided by others)

No Hardware	NH
-------------	----

**Acoustic Panel Color**

See page 3 for color offering

**Baffle Length**

(Leave blank for patterns. Baffles are 3/4" longer than specified and cannot be cut to length or joined in the field.)

Specify length in 1" increments  
from 2' to 208'

(16' maximum for DTG, consult factory for alternate lengths.)

**Pattern Options**


(5' minimum leg length for L patterns.  
6' minimum leg length for U and Rectangle patterns)

<b>'L' pattern</b>	A' x B'
<b>'U' pattern</b>	A' x B' x C'
<b>Rectangular pattern</b>	A' x B' R

(Consult factory for other pattern options)

# Seem 2 Acoustic Materials

## THE NATURALS (25% SCALE)

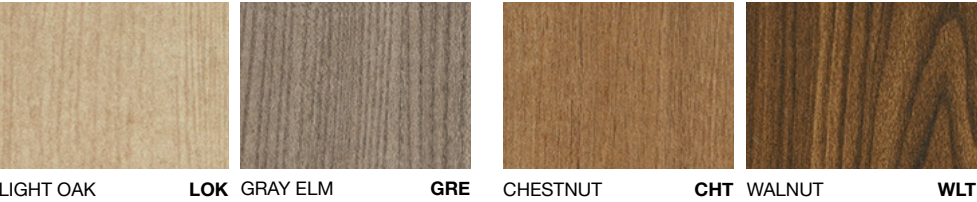

## STANDARD PET



## PREMIUM PET



# Declare.

9mm PET Felt  
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA  
Life Expectancy: 30 Year(s)  
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:  
Polyethylene terephthalate: PET; N, N'-Ethylene bisstearamide: Octadecanamide, N,N'-1,2-ethanediylbis-; Stearic Acid; Antioxidant 1076; Benzenepropanoic acid, 3,5-bis(1-(1-dimethylethyl)-4-hydroxy-, octadecyl ester; Antioxidant KY-405; Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]; Titanium Dioxide: Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List:  
■ LBC Red List Free    % Disclosed: 100% at 100ppm  
□ LBC Red List Approved    VOC Content: Not Applicable  
□ Declared

I-10 Interior Performance: CDPH Standard Method v1.2-2017  
I-14 Responsible Sourcing: Not Applicable

FPL-0001  
EXP. 01 APR 2025  
Original Issue Date: 2020

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

# Declare.

Seem\* 2 Acoustic  
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA  
Life Expectancy: 10 Year(s)  
End of Life Options: Recyclable (55%), Landfill (45%)

Ingredients:  
Polyethylene Terephthalate; Steel; UNS G1008; Copper; Polymethyl methacrylate; Small Electrical Components - RoHS Compliant; Poly[imino(1,6-dioxo-1,6-hexanediyl)imino-1,6-hexanediyl]; Polyvinyl chloride; Steel; carbon; Zinc; Aluminum; Steel manufacture, chemicals; Methyl methacrylate; Polyethylene

<sup>1</sup>LBC Temp Exception RL-002 - Small Electrical Components

Living Building Challenge Criteria:


I-13 Red List:  
□ LBC Red List Free    % Disclosed: 100% at 100ppm  
□ LBC Red List Approved    VOC Content: Not Applicable  
■ Declared

I-10 Interior Performance: Not Applicable  
I-14 Responsible Sourcing: Not Applicable

FPL-0005  
EXP. 01 JAN 2026  
Original Issue Date: 2024

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY  
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

MOUNTING DETAILS

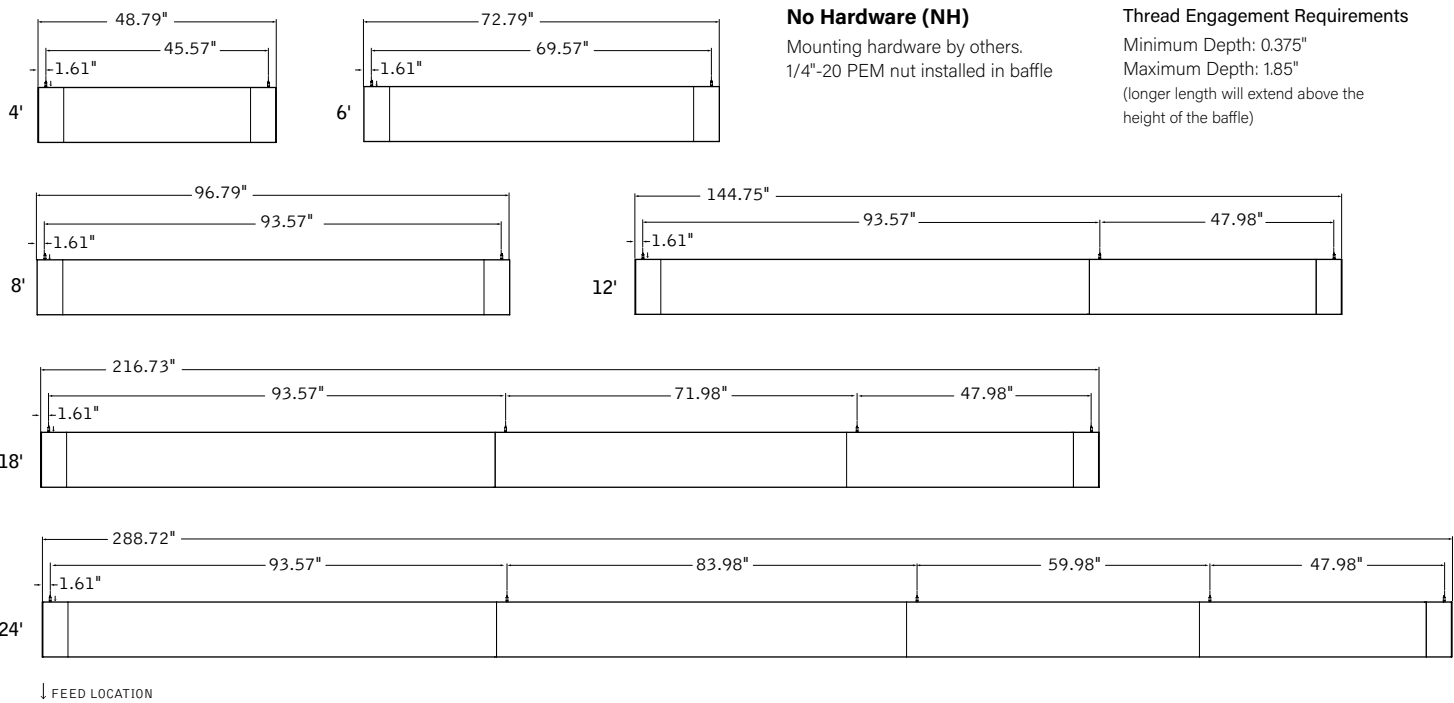

RUN CHART

Run length (ft)	Housing Configuration Section Lengths	# of hang points per run	Run length (ft)	Housing Configuration Section Lengths	# of hang points per run
9	5 + 4	3	29	8 + 7 + 7 + 7	5
10	6 + 4	3	30	8 + 7 + 7 + 8	5
11	7 + 4	3	31	8 + 7 + 7 + 5 + 4	6
12	8 + 4	3	32	8 + 7 + 7 + 6 + 4	6
13	8 + 5	3	33	8 + 7 + 7 + 7 + 4	6
14	8 + 6	3	34	8 + 7 + 7 + 7 + 5	6
15	8 + 7	3	35	8 + 7 + 7 + 7 + 6	6
16	8 + 8	3	36	8 + 7 + 7 + 7 + 7	6
17	8 + 5 + 4	4	37	8 + 7 + 7 + 7 + 8	6
18	8 + 6 + 4	4	38	8 + 7 + 7 + 7 + 5 + 4	7
19	8 + 7 + 4	4	39	8 + 7 + 7 + 7 + 6 + 4	7
20	8 + 7 + 5	4	40	8 + 7 + 7 + 7 + 7 + 4	7
21	8 + 7 + 6	4	41	8 + 7 + 7 + 7 + 7 + 5	7
22	8 + 7 + 7	4	42	8 + 7 + 7 + 7 + 7 + 6	7
23	8 + 7 + 8	4	43	8 + 7 + 7 + 7 + 7 + 7	7
24	8 + 7 + 5 + 4	5	44	8 + 7 + 7 + 7 + 7 + 8	7
25	8 + 7 + 6 + 4	5	45	8 + 7 + 7 + 7 + 7 + 5 + 4	8
26	8 + 7 + 7 + 4	5	46	8 + 7 + 7 + 7 + 7 + 6 + 4	8
27	8 + 7 + 7 + 5	5	47	8 + 7 + 7 + 7 + 7 + 7 + 4	8
28	8 + 7 + 7 + 6	5	48	8 + 7 + 7 + 7 + 7 + 7 + 5	8

Standard run configurations, consult factory for custom configurations and longer run lengths.