

# TruTile™ Designs

ACOUSTIC WALL TILE



FOCAL POINT®




Wide Rule & Wide Arc new deco pattern




Diamond vertical brick pattern



Pattern detail




Solid colors  
(Seafoam at 25% scale)



The Naturals  
(Light Oak at 25% scale)

## DESIGNS (8% scale)

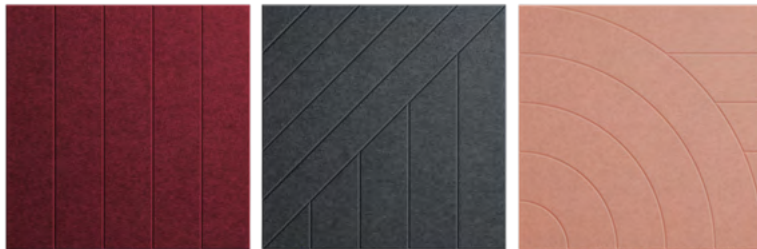

**Wide Rule**  
(Berry)

**Wide Slant**  
(Slate)

**Wide Arc**  
(Blush)



**Multitrack**  
(Shadow Gray)



**Double Arc**  
(Seafoam)



**Diamond**  
(Limestone)



**Willow**  
(The Naturals - Walnut)

## FEATURES

9mm thick, 2' x 2' square sound absorbing wall tiles available in 7 designs or solid panels that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.

Available with The Naturals, a series of finishes that exude biophilic beauty.

Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Textures and TruTile Shapes for more coordinated wall tile options.


## DIMENSIONAL DATA

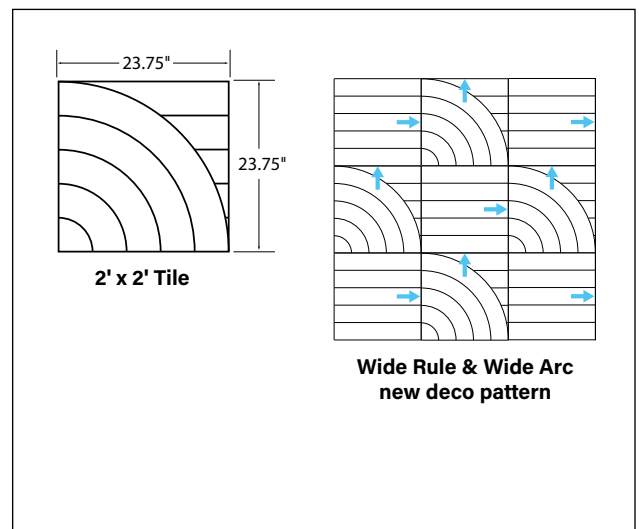


fixture:

project:


**PATTERN INSPIRATIONS**

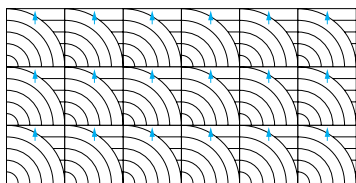


Wide Arc vertical pattern

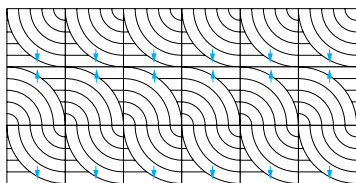


Wide Arc weave pattern

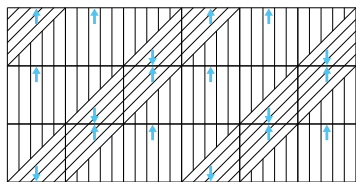


Wide Slant & Wide Rule stripe pattern

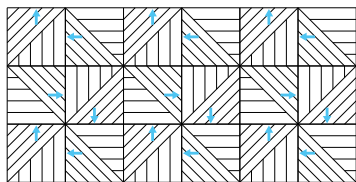


Wide Slant pinwheel pattern

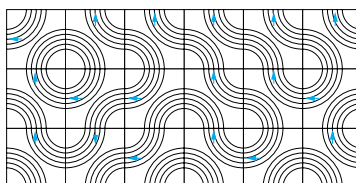


Double Arc organic pattern

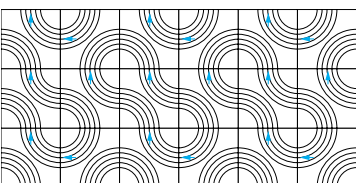


Double Arc infinity pattern

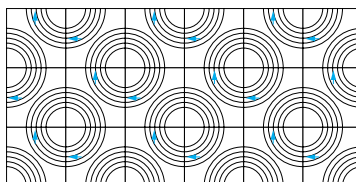


Double Arc circles pattern

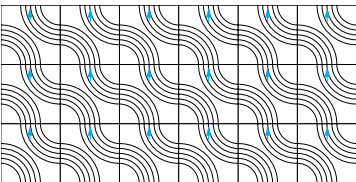


Double Arc vertical pattern

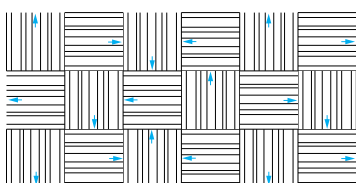


Multitrack madras pattern

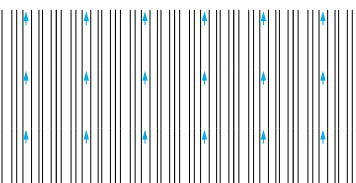


Multitrack vertical pattern

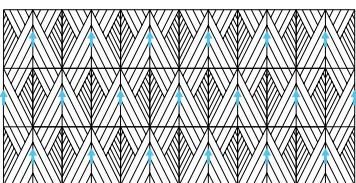


Diamond vertical brick pattern  
(2 half tiles cut in field)

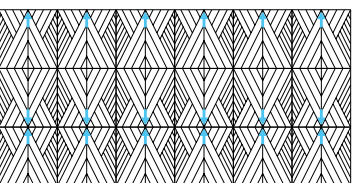

Diamond weave pattern

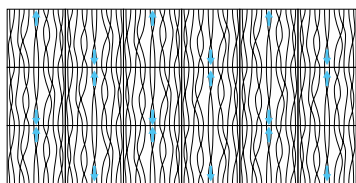

Willow alternating vertical pattern

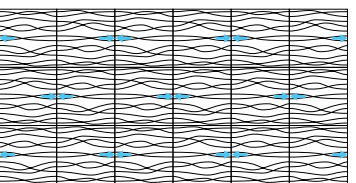

Willow alternating horizontal pattern

**ORDERING**

**Series** AUTT

TruTile **AUTT**

**Size** 22

2' x 2' panel **22**

**Shape** SQ

Square **SQ**

**Design** \_\_\_\_\_

Wide Rule **WRL**

Wide Arc **WAC**

Wide Slant **WST**

Double Arc **DAC**

Multitrack **MTK**

Diamond **DMD**

Willow **WLO**

Solid **SD**

**Mounting** SM

Surface Mount by others **SM**

(Construction glue direct to surface recommended)

**Acoustic Tile Color**

See page 3 for color offering



Options in orange qualify for the Quickship program. Five color options. 10-day up to 200 pieces. Refer to Quickship Guide for complete details.

**SPECIFICATIONS**

**Acoustic Material**

|  |   |
|--|---|
| <b>Content</b>                         | Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant.<br><br>See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit <a href="http://focalpointlights.com/acousticsolutions">focalpointlights.com/acousticsolutions</a> . Lead times vary depending on color. |
| <b>Cleaning and Care</b>               | Remove dust and debris with a clean, soft, lint-free cloth or vacuum  |
| <b>PET Thickness</b>                   | 9mm   |
| <b>Surface Burning Characteristics</b> | ASTM E84 Class A / CAN ULC S102<br>Flame Spread: 0<br>Smoke Development Index: 300  |

**Acoustic Performance**

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from [focalpointlights.com](http://focalpointlights.com). Contact [acoustic.solutions@focalpointlights.com](mailto:acoustic.solutions@focalpointlights.com) for technical questions.

|            |  |
|------------|--|
| <b>NRC</b> | Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1.<br><br>NRC = 0.30 |
|------------|--|

**Weight**

1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5".

**Reliability**

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.


**Warranty**

1-year limited warranty.

# Acoustic Materials




## THE NATURALS (25% SCALE)

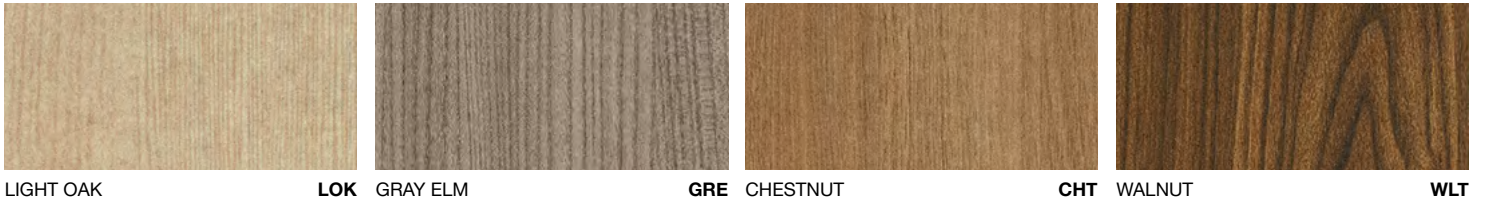

## STANDARD PET



## PREMIUM PET

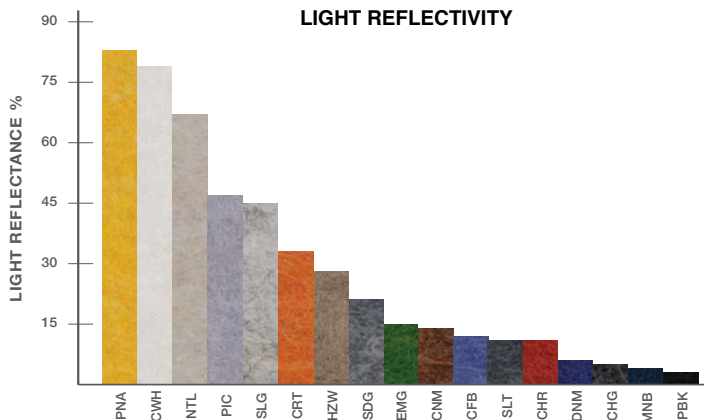

**Declare.**

**PET**  
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA  
Life Expectancy: 30 Year(s)  
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

**Ingredients:**

**Polyethylene terephthalate:** PET; **N, N'-Ethylene bisstearamide:** Octadecanamide, N,N'-1,2-ethanediylbis-; **Stearic Acid;** **Antioxidant 1076:** Benzenepropanoic acid, 3,5-bis(1-(dimethylethyl)-4-hydroxy-, octadecyl ester; **Antioxidant KY-405:** Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]; **Titanium Dioxide:** Titanium dioxide

**Living Building Challenge Criteria:**

**I-13 Red List:**

- LBC Red List Free
- LBC Red List Approved
- Declared

% Disclosed: 100% at 100ppm  
VOC Content: Not Applicable

**I-10 Interior Performance:** Not Compliant  
**I-14 Responsible Sourcing:** Not Applicable

FPL-0001  
EXP. 01 APR 2025  
Original Issue Date: 2020

INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)