

TruTile™ Designs


ACOUSTIC WALL TILE




Wide Rule & Wide Arc new deco pattern



Diamond vertical brick pattern



Pattern detail



Solid colors
(Seafoam at 25% scale)



The Naturals
(Light Oak at 25% scale)

DESIGNS (8% scale)



Wide Rule
(Berry)




Wide Slant
(Slate)



Wide Arc
(Blush)



Multitrack
(Shadow Gray)



Double Arc
(Seafoam)



Diamond
(Limestone)



Willow
(The Naturals - Walnut)

FEATURES

9mm thick, 2' x 2' square sound absorbing wall tiles available in 7 designs or solid panels that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.

Available with The Naturals, a series of finishes that exude biophilic beauty.


Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Textures and TruTile Shapes for more coordinated wall tile options.

DIMENSIONAL DATA




2' x 2' Tile




Wide Rule & Wide Arc
new deco pattern


PATTERN INSPIRATIONS

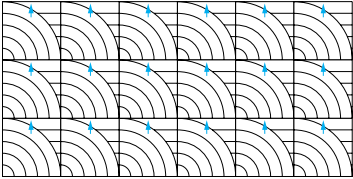


Wide Arc vertical pattern

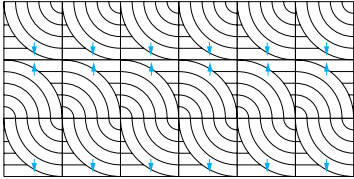


Wide Arc weave pattern

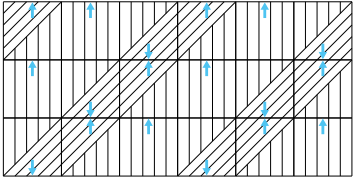


Wide Slant & Wide Rule stripe pattern

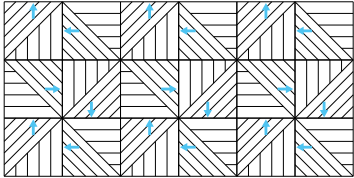


Wide Slant pinwheel pattern

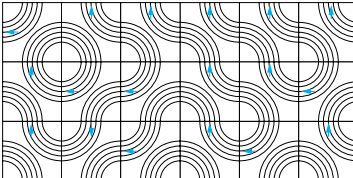


Double Arc organic pattern

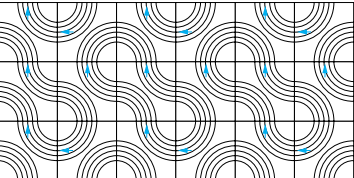


Double Arc infinity pattern

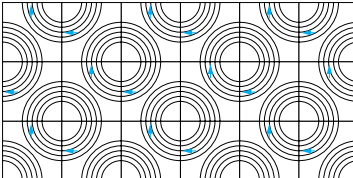


Double Arc circles pattern

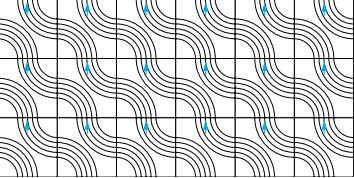


Double Arc vertical pattern

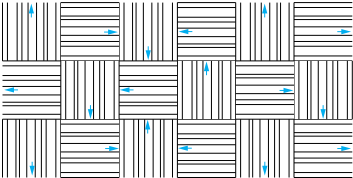


Multitrack madras pattern

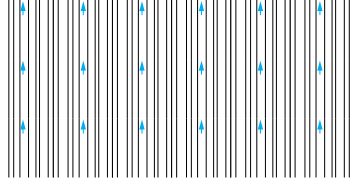


Multitrack vertical pattern

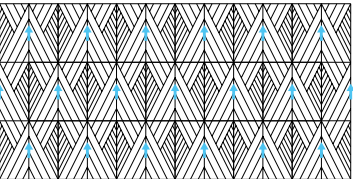


Diamond vertical brick pattern
(2 half tiles cut in field)

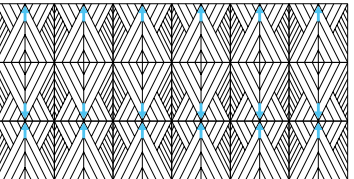

Diamond weave pattern

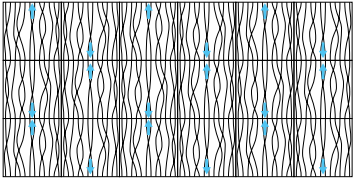


Willow alternating vertical pattern

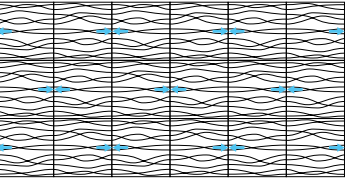

Willow alternating horizontal pattern

ORDERING

Series	AUTT
TruTile	AUTT
Size	22
2' x 2' panel	22
Shape	SQ
Square	SQ
Design	
Wide Rule	WRL
Wide Arc	WAC
Wide Slant	WST
Double Arc	DAC
Multitrack	MTK
Diamond	DMD
Willow	WLO
Solid	SD
Mounting	SM
Surface Mount by others	SM
(Construction glue direct to surface recommended)	
Acoustic Tile Color	
See page 3 for color offering	

 **QS 10 DAY**

Options in orange qualify for the Quickship program. Five color options. 10-day up to 200 pieces. Refer to Quickship Guide for complete details.

SPECIFICATIONS

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant. See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions . Lead times vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
Surface Burning Characteristics	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300
Acoustic Performance	
Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com . Contact acoustic.solutions@focalpointlights.com for technical questions.	
NRC	Noise Reduction Coefficient (NRC) is the average of how absorptive a material is at various frequencies within the human speech frequency range. Two materials with the same rating may not perform the same in application. Typically, an NRC of 0 indicates perfect reflection, and an NRC of 1 is designated as perfect absorption. However, based on the testing methodology and depending upon the material's shape or surface area products can test at an NRC greater than 1. NRC = 0.30

Weight
1.8 lbs per tile. Ships up to (12) twelve per box = 25.25" x 25.25" x 5".

Reliability
At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty
1-year limited warranty.


Acoustic Materials




THE NATURALS (25% SCALE)



STANDARD PET

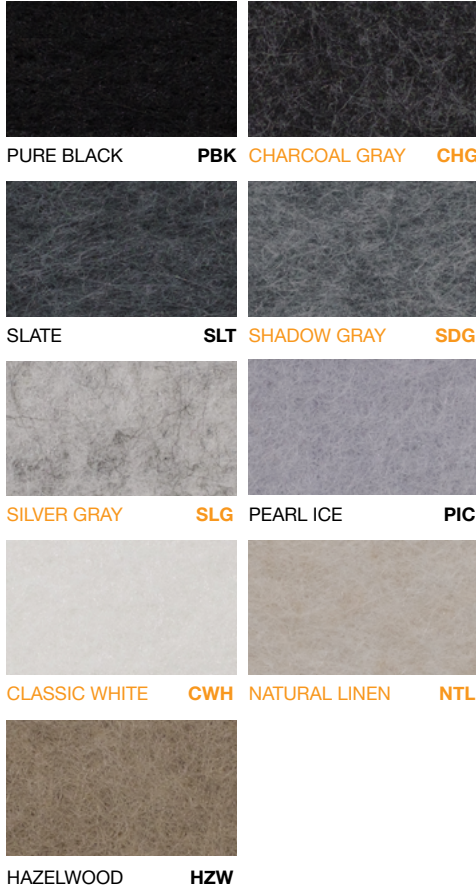

PREMIUM PET

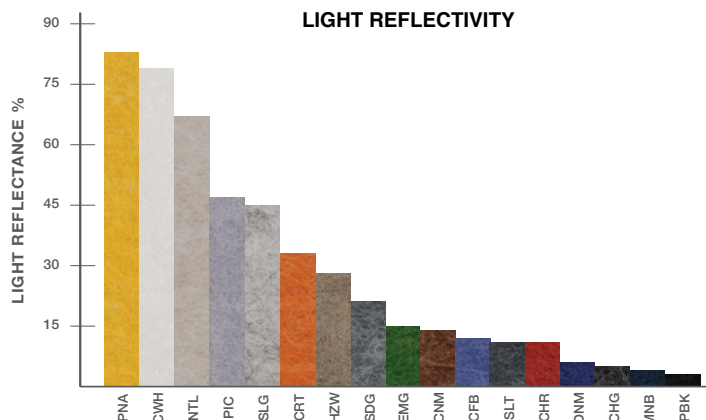

Declare.

9mm PET Felt
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene terephthalate: PET; N, N'-Ethylene bisstearamide: Octadecanamide, N,N'-1,2-ethanediylbis-; Stearic Acid; Antioxidant 1076: Benzenepropanoic acid, 3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester; Antioxidant KY-405: Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]-; Titanium Dioxide: Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List:

■ LBC Red List Free % Disclosed: 100% at 100ppm
□ LBC Red List Approved VOC Content: Not Applicable
□ Declared

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable

FPL-0001
EXP. 01 APR 2025
Original Issue Date: 2020

MANUFACTURED RESPONSIBLY FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare