
TruTile® Designs





DESIGNS (8% scale)

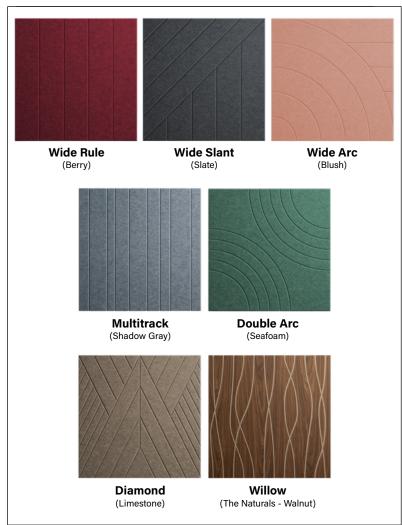

FEATURES

9mm thick, 2' x 2' square sound absorbing wall tiles available in 7 designs or solid panels that can be arranged to create a myriad of unique patterns.


Wide range of color options provides design flexibility and personalization for any project.


Available with The Naturals, a series of finishes that exude biophilic beauty.

Pair with Focal Point acoustic luminaires and unlit baffles to create a coordinated look within interior spaces.

See also TruTile Textures and TruTile Shapes for more coordinated wall tile options.


DIMENSIONAL DATA






Wide Rule & Wide Arc new deco pattern


PATTERN INSPIRATIONS




Wide Arc vertical pattern




Wide Slant & Wide Rule stripe pattern




Double Arc organic pattern




Double Arc circles pattern




Multitrack madras pattern




Diamond vertical brick pattern







Wide Arc weave pattern




Wide Slant pinwheel pattern




Double Arc infinity pattern



Double Arc vertical pattern



Multitrack vertical pattern



Diamond weave pattern

>		>>		>	
~~~		~~~		~~~	
$\sim$				$\sim$	$\sim$
$\sim$			>~	~	
X	X	X	X	X	N
~~					E S
					F~
~~~				~~	
			~~~~		$\sim$
$\rightarrow \overline{\sim} <$		$\sim \sim$	$\sim$	$\sim \sim$	$\sim$
~					
~~					
~~		52	XX		~
~~~					

Willow alternating horizontal pattern

ORDERING		
Series		AUTT
TruTile	AUTT	
Size		22
2' x 2' panel	22	
Shape		SQ
Square	SQ	
Design		
Design	14/51	
Wide Rule	WRL	
Wide Arc	WAC	
Wide Slant	WST	
Double Arc	DAC	
Multitrack	MTK	
Diamond	DMD	
Willow	WLO	
Solid	SD	
Mounting		SM
Surface Mount by others	SM	
(Construction glue direct to surface recommended)		
Acoustic Tile Color See page 3 for color offering		
QS 10 DAY Options in orange qualify options. 10-day up to 200		

SPECIFICATIONS


Acoustic Material

Content	Material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) and is moisture resistant.					
	See Acoustic Materials page for color offering. Colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions. Lead times vary depending on color.					
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum					
PET Thickness	9mm					
Surface Burning Characteristcs	ASTM E84 Class A / CAN ULC S102 Flame Spread: 0 Smoke Development Index: 300					

Acoustic Performance

Acoustic testing is performed on all Focal Point acoustic products and varies based on installation and configuration. ASTM C423 test reports can be downloaded from focalpointlights.com.

Contact acoustic.solutions@focalpointlights.com for technical questions.



Weight

1.8 lbs per tile. Ships up to (12) twelve per box = $25.25" \times 25.25" \times 5"$.

Reliability

At Focal Point, our products are designed to stand the test of time. Each product is engineered using superior components, manufactured with the utmost care and rigorously tested.

Warranty

1-year limited warranty.

Acoustic Materials



FOCAL POINT[®]

THE NATURALS (25% SCALE)

THE NATURALS	s (25% s	SCALE)									
LIGHT OAK		LOK GRA	Y ELM		GRE	CHESTNUT		CHT WALK	IUT		WL
STANDARD PET			1000	PREMIUM PET			4.0220				
PURE BLACK	РВК	CHARCOAL GRAY	CHG	CORNFLOWER BLU	JE CFB	DENIM BLUE	DNB	MIDNIGHT BLUE	MNB	DEEP PURPLE	DP
SLATE	SLT	SHADOW GRAY	SDG	BRICK RED	BRD	CHERRY RED	CHR	BERRY	BRY	BLUSH	BL
	A SUS										
SILVER GRAY	SLG	PEARL ICE	PIC	DEEP WATER	DWT	SEAFOAM	SFM	EMERALD GREEN	EMG	LIMESTONE	LM
CLASSIC WHITE	СШН	NATURAL LINEN	NTL	CARROT	CRT	PINEAPPLE	PNA	PET Focal Point	, LLC	lare.	¥ L.
HAZELWOOD	HZW							Life Expectancy:	30 Year(s) ns: Salvage	able/Reusable in its Entirety	5
90 +-		LIGHT REFL	FCTIVI	TY				bisstearamide: O Stearic Acid: Stea Benzenepropanoi octadecyl ester; A	ctadecanar aric Acid; A c acid, 3,5- ntioxidant hyl) -N-[4-	bis(1,1-dimethylethyl)-4-hydr KY-405: Benzenamine, 4-(1 (1-methyl-1-phenylethyl)pher	roxy-, I-
75 — %	1000							Living Building C	hallenge C	riteria:	
- 00 CTANC								I-13 Red List: LBC Red List Fr LBC Red List A		% Disclosed: 100% at 100; VOC Content: Not Applica	
60 + 00 + 00 + 00 + 00 + 00 + 00 + 00 +		125						Declared I-10 Interior Perfo I-14 Responsible	rmance: N	ot Compliant	
10 HT 30									sourcing.r		
⊐ 15 —			and the second					FPL-0001 EXP. 01 JUN 2026 Original Issue Dat			
								MANUFACTURER	RESPONSIBLE F	OR LABEL ACCURACY ITURE INSTITUTE™ living-future.org	g/declare
PNA	LEN C	SLG CRT HZW SDG	EMG CFB	SLT CHR DNM CHG CHG MNB	PBK						