

A brand of **legrand**



Blume[®]
& Zyl[®]



FOCAL POINT[®]

Bringing It All To Light[®]

Blume®

Inspired by mother nature, Blume is an architectural pendant that adds a flourish of color and delivers optimal illumination while quieting a space.

- Solid or Pinstripe design
- Nominal 12" and 19" diameter pendants
- Made of eco-friendly, PET felt material
- Broad PET felt color palette enables hundreds of color combinations
- Mix and match finishes and colors for canopy, stem, and cord
- Lumen output range: 700- 3000lm
- Spot to Super Wide Flood distributions
- Multiple driver options: compatible with several lighting control systems
- Accommodates various ceiling applications: grid, drywall, and open ceiling
- Use as individual pendants or clustered



BLUME 3 | PINSTRIPE



DENIM BLUE

PINEAPPLE

CHERRY RED

Blume 3 & 4 | OPEN OFFICE





Form and function come together with Zyl, which adds flair to interior spaces while creating a more pleasant environment.

- Solid or Pinstripe design
- Nominal 8" and 12" diameter pendants with three height options for each size
- Made of eco-friendly, PET felt material
- Broad PET felt color palette enables hundreds of color combinations
- Mix and match finishes and colors for canopy, stem, and cord
- Lumen output range: 700 - 3000lm
- Spot to Super Wide Flood distributions
- Multiple driver options: compatible with several lighting control systems
- Accommodates various ceiling applications: grid, drywall, and open ceiling
- Use as individual pendants or clustered





CORNFLOWER
BLUE

CARROT

BERRY

Form


Size & Shape

The simple yet intriguing forms and various size options of Blume and Zyl deliver a bold visual statement while meeting the illumination and acoustic needs of diverse spaces.




Blume 3
SOLID




Blume 3
PINSTRIPE

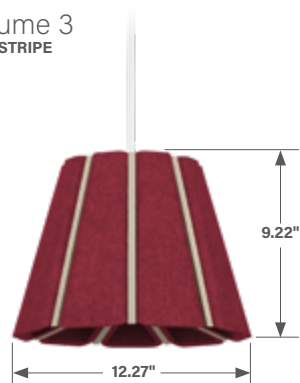


Zyl 3
SOLID &
PINSTRIPE

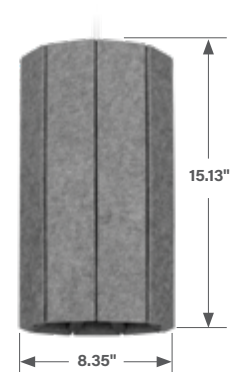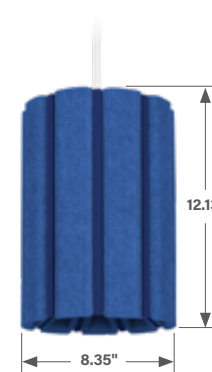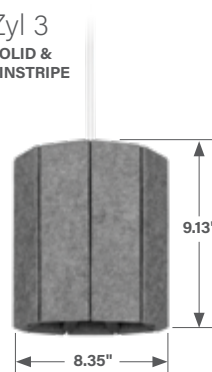




Blume 4
SOLID

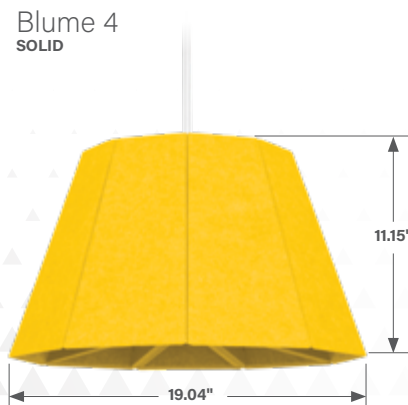

Blume 4
PINSTRIPE

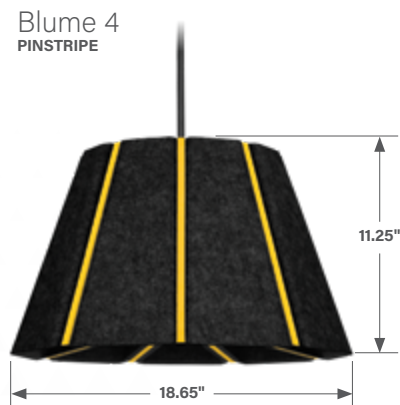


Zyl 4
SOLID &
PINSTRIPE

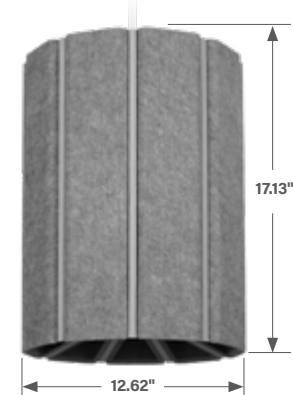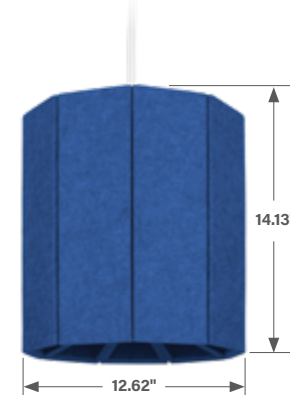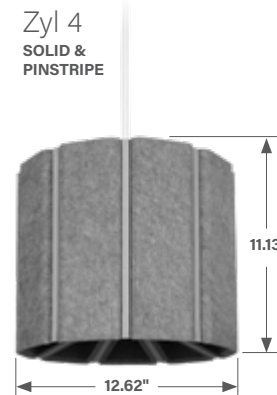

Illumination


Optics

Two optic options, 50° and 80° cut-offs, promote visual comfort and control brightness while a selection of distributions, from spot to super wide flood, support various commercial applications.




Spot


(Blume & Zyl 4 only)




Narrow Flood



Flood




Wide Flood



Very Wide Flood

(Blume & Zyl 4 only)



Super Wide Flood

Performance

Type	Lumen Output	Delivered Lumens	System Watts	LPW
Blume 3 Zyl 3	700L	736	8	96
	1000L	1082	12	94
	1500L	1582	17	92
	1700L	1743	19	91
	2000L	2057	24	86
Blume 4 Zyl 4	1000L	1033	11	91
	1500L	1509	18	86
	2000L	2074	24	88
	2500L	2609	31	84
	3000L	2906	34	84

3500K, 80CRI, Clear Diffuse, Narrow Flood Distribution. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

BLUME 4 | PINSTRIPE

BLUME 3 | SOLID

ZYL 4 | SOLID

ZYL 3 | PINSTRIPE



Finishes



PET Material

Shade material is 100% polyester containing up to 50% recycled plastic bottles (PET) with an ASTM E-84 Class A / CAN ULC S102 fire rating and is moisture resistant. It is Declare Certified, LBC Red List Free. Select from hundreds of PET felt color combinations to achieve a personalized aesthetic.


STANDARD COLORS




PREMIUM COLORS*

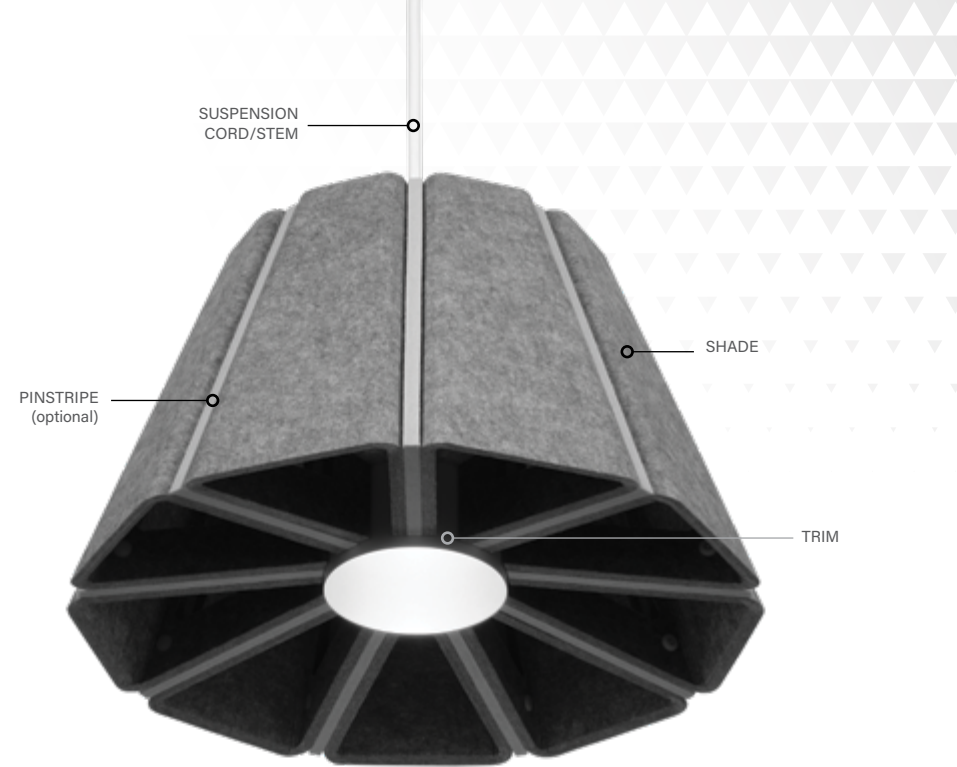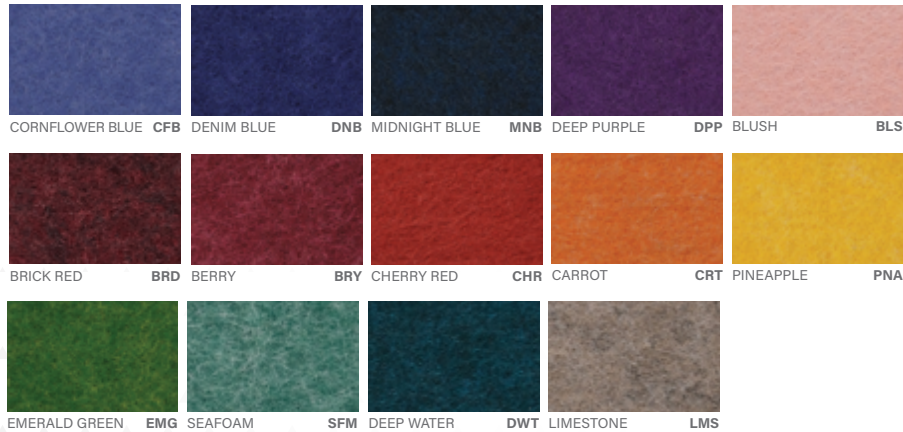

CANOPY TYPES

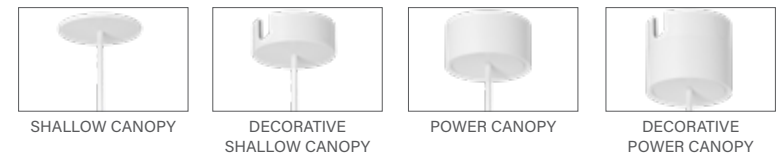

MOUNTING TYPES

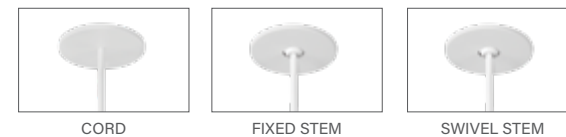

CORD COLORS



CANOPY/STEM/TRIM PAINT FINISHES





FOCAL POINT®

Bringing It All To Light™



©2025 Focal Point, LLC. 4141 S Pulaski Road, Chicago, IL 60632 | T 773.247.9494 | www.focalpointlights.com All rights reserved. "Focal Point", "Bringing It All To Light", "Blume", "Zyl", and the light-ray graphic are trademarks or registered trademarks of Focal Point, LLC. Visit www.focalpointlights.com for specification and other details on our entire catalog.

Declare.

PET Focal Point, LLC

Final Assembly: Chicago, Illinois, USA

Life Expectancy: 30 Year(s)

End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene terephthalate: PET; N, N'-Ethylene bisstearamide: Octadecanamide, N,N'-1,2-ethanediybis-; **Stearic Acid:** Stearic Acid; **Antioxidant 1076:** Benzenepropanoic acid, 3,5-bis(1-dimethylethyl)-4-hydroxy-, octadecyl ester; **Antioxidant KY-405:** Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]-; **Titanium Dioxide:** Titanium dioxide

Living Building Challenge Criteria:

I-13 Red List:

- | | |
|---|-----------------------------|
| <input checked="" type="checkbox"/> LBC Red List Free | % Disclosed: 100% at 100ppm |
| <input type="checkbox"/> LBC Red List Approved | VOC Content: Not Applicable |
| <input type="checkbox"/> Declared | |

I-10 Interior Performance: Not Compliant

I-14 Responsible Sourcing: Not Applicable

FPL-0001

EXP. 01 JUN 2026

Original Issue Date: 2020

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare