

A brand of **legrand**



Blume<sup>®</sup>  
& Zyl<sup>®</sup>



**FOCAL POINT<sup>®</sup>**

Bringing It All To Light<sup>®</sup>



# Blume®

**Inspired by mother nature, Blume is an architectural pendant that adds a flourish of color and delivers optimal illumination while quieting a space.**

- Solid or Pinstripe design
- Nominal 12" and 19" diameter pendants
- Made of eco-friendly, PET felt material
- Broad PET felt color palette enables hundreds of color combinations
- Mix and match finishes and colors for canopy, stem, and cord
- Lumen output range: 700- 3000lm
- Spot to Super Wide Flood distributions
- Multiple driver options: compatible with several lighting control systems
- Accommodates various ceiling applications: grid, drywall, and open ceiling
- Use as individual pendants or clustered



BLUME 4 | SOLID

BLUME 3 | PINSTRIPE





DENIM BLUE

PINEAPPLE

CHERRY RED

Blume 3 & 4 | OPEN OFFICE




Blume 4 | **OPEN OFFICE**





**Form and function come together with Zyl, which adds flair to interior spaces while creating a more pleasant environment.**

- Solid or Pinstripe design
- Nominal 8" and 12" diameter pendants with three height options for each size
- Made of eco-friendly, PET felt material
- Broad PET felt color palette enables hundreds of color combinations
- Mix and match finishes and colors for canopy, stem, and cord
- Lumen output range: 700 - 3000lm
- Spot to Super Wide Flood distributions
- Multiple driver options: compatible with several lighting control systems
- Accommodates various ceiling applications: grid, drywall, and open ceiling
- Use as individual pendants or clustered

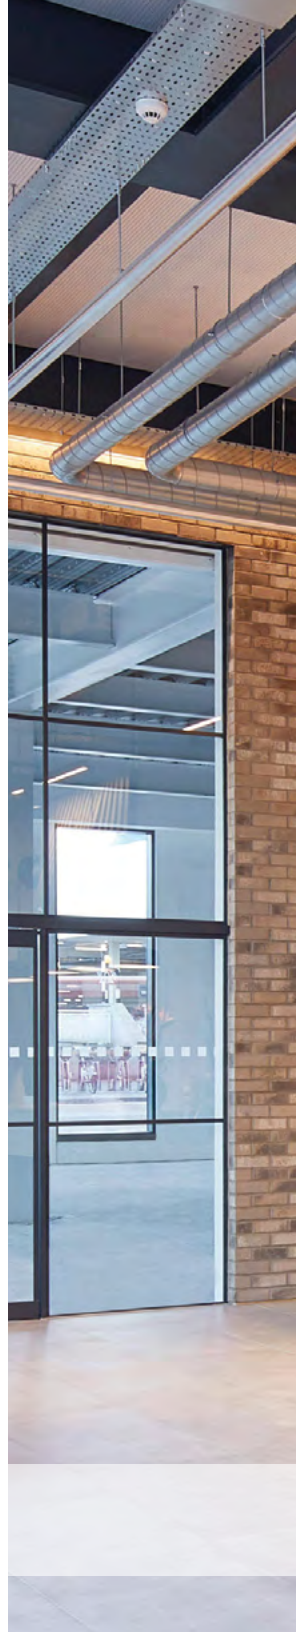

MIDNIGHT BLUE



Zyl 3 | RECEPTION





CORNFLOWER  
BLUE

CARROT

BERRY

# Form

## Size & Shape

The simple yet intriguing forms and various size options of Blume and Zyl deliver a bold visual statement while meeting the illumination and acoustic needs of diverse spaces.

Blume 3  
SOLID



Blume 3  
PINSTRIPE






Blume 4  
SOLID






Blume 4  
PINSTRIPE



Zyl 3  
SOLID &  
PINSTRIPE

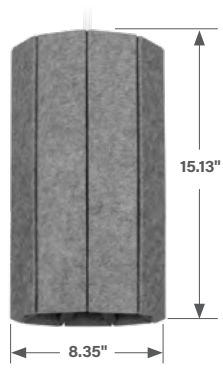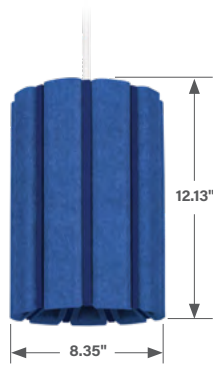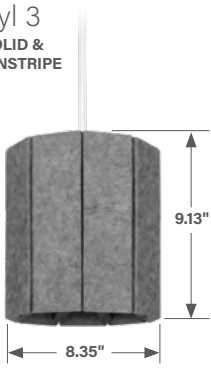


Zyl 4  
SOLID &  
PINSTRIPE

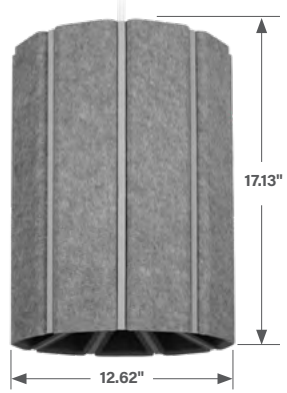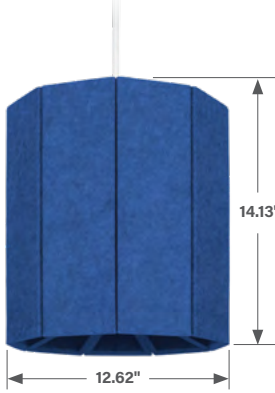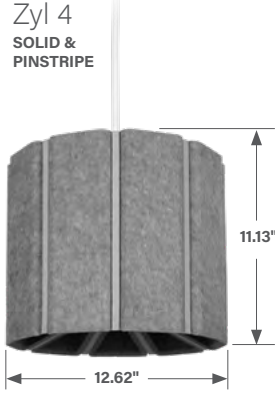

# Illumination


## Optics

Two optic options, 50° and 80° cut-offs, promote visual comfort and control brightness while a selection of distributions, from spot to super wide flood, support various commercial applications.




Spot


(Blume & Zyl 4 only)




Narrow Flood



Flood




Wide Flood



Very Wide Flood

(Blume & Zyl 4 only)



Super Wide Flood

## Performance

Type	Lumen Output	Delivered Lumens	System Watts	LPW
Blume 3 Zyl 3	700L	736	8	96
	1000L	1082	12	94
	1500L	1582	17	92
	1700L	1743	19	91
	2000L	2057	24	86
Blume 4 Zyl 4	1000L	1033	11	91
	1500L	1509	18	86
	2000L	2074	24	88
	2500L	2609	31	84
	3000L	2906	34	84

3500K, 80CRI, Clear Diffuse, Narrow Flood Distribution. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

BLUME 4 | PINSTRIPE

BLUME 3 | SOLID

ZYL 4 | SOLID

ZYL 3 | PINSTRIPE



# Finishes


## PET Material


Shade material is 100% polyester containing up to 50% recycled plastic bottles (PET) with an ASTM E-84 Class A / CAN ULC S102 fire rating and is moisture resistant. It is Declare Certified, LBC Red List Free. Select from hundreds of PET felt color combinations to achieve a personalized aesthetic.

### STANDARD COLORS



### PREMIUM COLORS\*



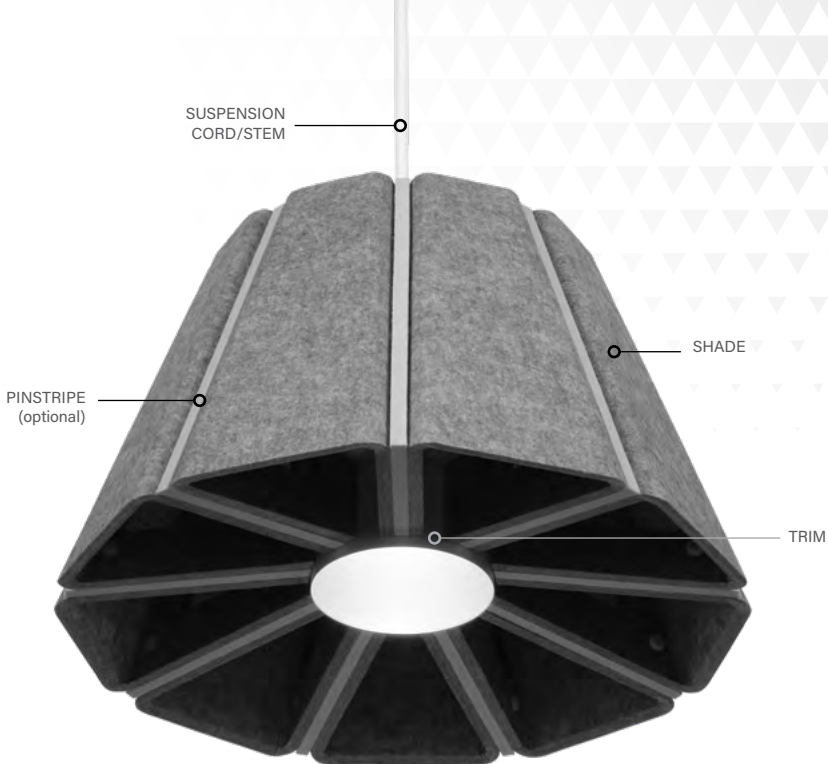

### CANOPY TYPES



SHALLOW CANOPY



DECORATIVE  
SHALLOW CANOPY



POWER CANOPY



DECORATIVE  
POWER CANOPY

### MOUNTING TYPES



CORD




FIXED STEM



SWIVEL STEM

### CORD COLORS



BLACK



BK WHITE



WH GRAY

GRY

### CANOPY/STEM/TRIM PAINT FINISHES



BLACK



BK WHITE



WH PALLADIUM SILVER PS



# Declare.

## PET Focal Point, LLC

**Final Assembly:** Chicago, Illinois, USA

**Life Expectancy:** 30 Year(s)

**End of Life Options:** Salvageable/Reusable in its Entirety, Recyclable (100%)

### Ingredients:

**Polyethylene terephthalate:** PET; **N, N'-Ethylene bisstearamide:** Octadecanamide, N,N'-1,2-ethanedilylbis-; **Stearic Acid:** Stearic Acid; **Antioxidant 1076:** Benzenepropanoic acid, 3,5-bis(1-dimethylethyl)-4-hydroxy-, octadecyl ester; **Antioxidant KY-405:** Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]-; **Titanium Dioxide:** Titanium dioxide

### Living Building Challenge Criteria:

#### I-13 Red List:

- LBC Red List Free      % Disclosed: 100% at 100ppm
- LBC Red List Approved      VOC Content: Not Applicable
- Declared

**I-10 Interior Performance:** Not Compliant

**I-14 Responsible Sourcing:** Not Applicable

FPL-0001  
EXP. 01 JUN 2026  
Original Issue Date: 2020

INTERNATIONAL LIVING FUTURE INSTITUTE™ [living-future.org/declare](http://living-future.org/declare)



**FOCAL POINT®**

Bringing It All To Light™

