



Zyl™ 3


DECORATIVE LED PENDANT

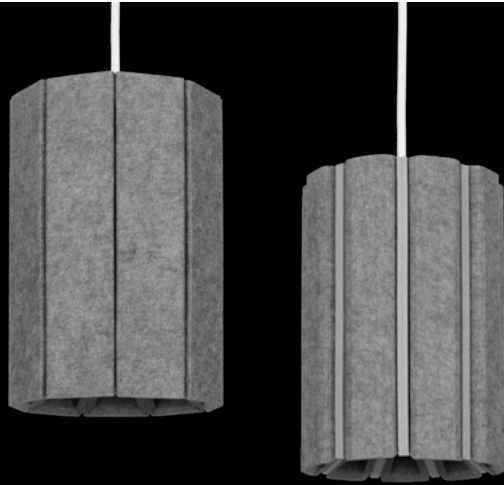


12" height shown

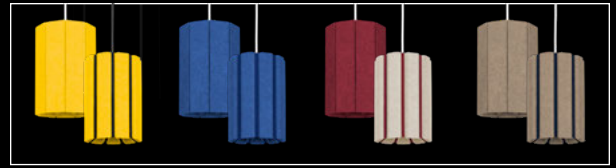


100's of customizable color combinations




Black trim detail




White trim detail



Palladium Silver trim detail



Solid shade detail from below




Zyl 4 companions






Cylinder companions

DIMENSIONAL DATA (continued on page 4)

Solid 12" height

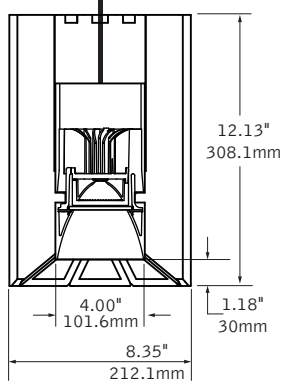

Pinstripe 12" height

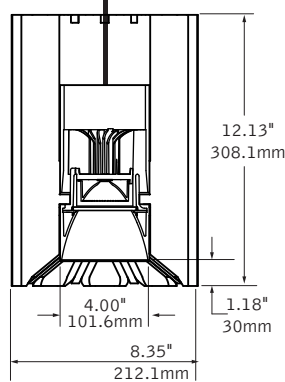

Canopy & Mounting options



FEATURES

Nominal 8" diameter decorative PET felt shaded pendant.

Available in three heights - 9", 12" and 15".


Wide range of color options provides design flexibility and personalization for any project.

Optional Pinstripe detail may be specified in any of the available colors.


50° cut-off available with Solite lens for brightness control and visual comfort.

50° and 80° cut-off available for optimal visual comfort.

PERFORMANCE



28° Narrow Flood
Lumen Output: 1500lm
Total System Watts: 17W
Spacing Criterion: 0.50




89° Super Wide Flood
Lumen Output: 1500lm
Total System Watts: 17W
Spacing Criterion: 1.24

Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

Decorative Finishes

Finish Diagram

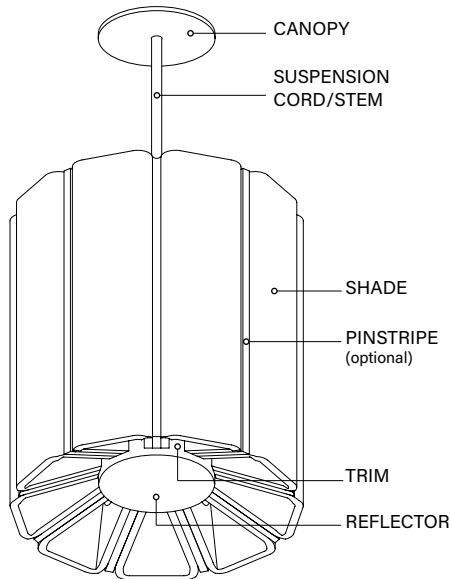

Canopy/Stem/Trim Paint Finishes



Cord Colors



PET Material

STANDARD COLORS



PREMIUM COLORS*



Declare.

9mm PET Felt
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Years
End of Life Options: Salvageable/Reusable in its Entirety,
Recyclable (100%)

Ingredients:

PET: Octadecanamide, N,N'-1,2-ethanediylbis; Stearic Acid;
Benzenamine, 4-(1-methyl-1-phenylethyl)-N-[4-(1-methyl-1-phenylethyl)phenyl]; Benzenepropanoic acid,
3,5-bis(1,1-dimethylethyl)-4-hydroxy-, octadecyl ester;
Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List:

☒ LBC Red List Free % Disclosed: 100% at 100ppm
☐ LBC Red List Approved VOC Content: Not Applicable
☐ Declared

I-10 Interior Performance: CDPH Standard Method v1.1-2010
I-14 Responsible Sourcing: Not Applicable

FPL-0001
EXP: 01 FEB 2022
Original Issue Date: 2020

MANUFACTURER RESPONSIBLE FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare


Zyl™ 3

DECORATIVE LED PENDANT

DIMENSIONAL DATA CONTINUED


SC - Shallow Canopy (Integral driver)

Indicates Driver Location

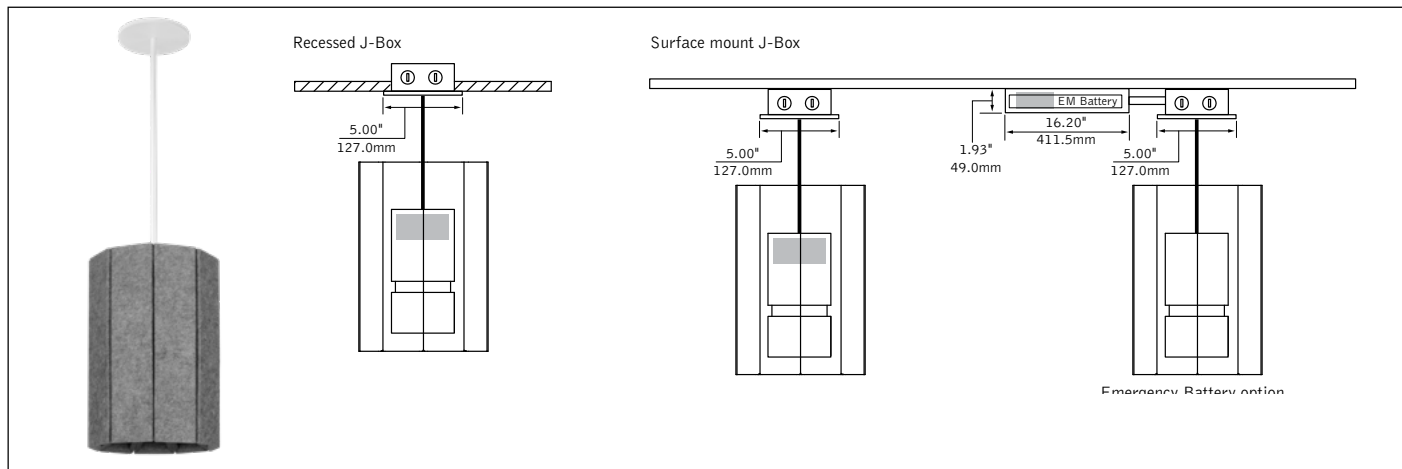


PC - Power Canopy

Indicates Driver Location

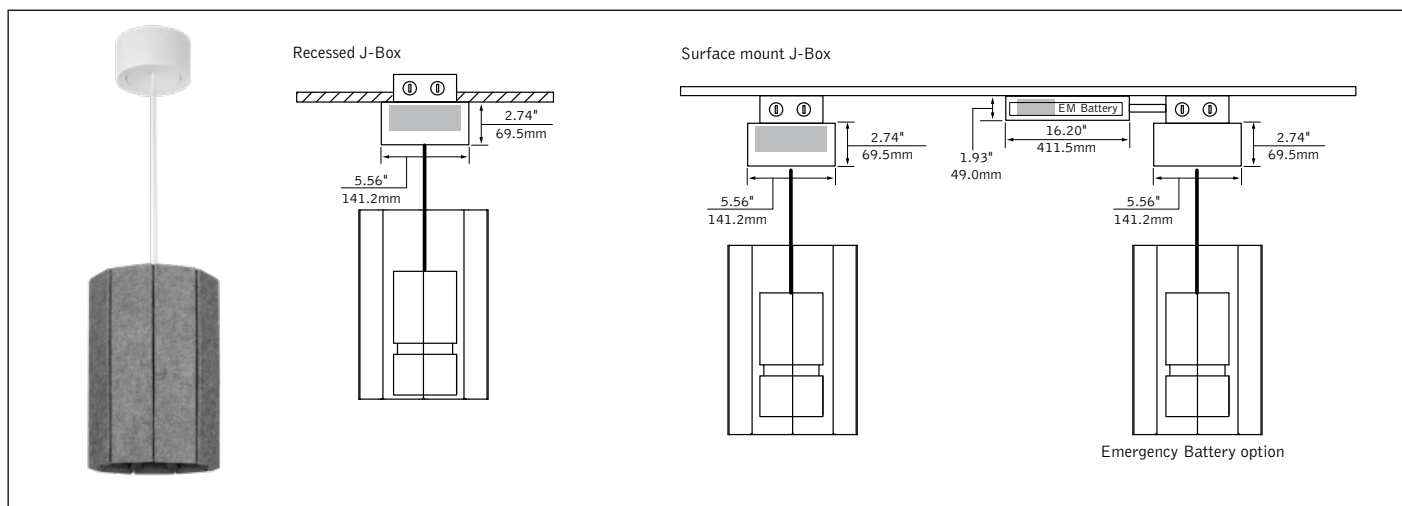

4" Octagonal J-box required (By others)

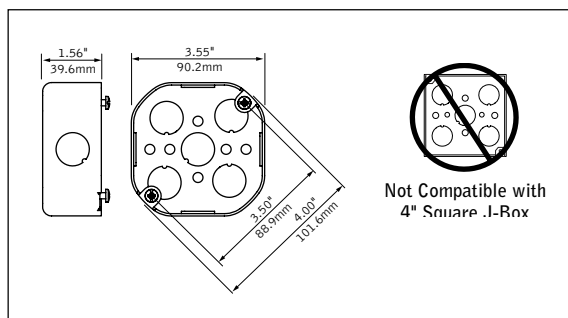

ZylTM 3

DECORATIVE LED PENDANT

LUMEN MULTIPLIER TABLE

Color Temperature & CRI

Trim Type	Optic	Color Temperature	Multiplier
Round [RD]	ALL	2700K, 80+ CRI [27K]	0.93
		2700K, 90+ CRI [927K]	0.78
		3000K, 80+ CRI [30K]	0.97
		3000K, 90+ CRI [930K]	0.81
		3500K, 80+ CRI [35K]	1.00
		3500K, 90+ CRI [935K]	0.83
		4000K, 80+ CRI [40K]	1.01
		4000K, 90+ CRI [940K]	0.86

Optic & Distribution

Trim Type	Optic	Distribution	Multiplier
Round [RD]	Tall Cone, 50° cut-off [DNT]	Narrow Flood (28°) [NFL]	1.00
		Flood 1 (34°) [FL1]	0.89
		Flood 2 (45°) [FL2]	0.75
		Wide Flood (57°) [WFL]	0.75
	Tall Cone, 50° cut-off with Solite Lens [DNTS]	Narrow Flood (28°) [NFL]	0.97
	Super Short Cone, 80° cut-off [DSS]	Super Wide Flood (89°) [SWFL]	0.74

Multiplier tables are provided to aid with estimation of lumen levels across options. Apply multipliers against ordered Lumen Output to estimate Delivered Lumens. Refer to IES files for most accurate photometric information.

How To Use Lumen Multipliers

Formula: (Lumen Output Value) x (Color Temperature & CRI) x (Optic & Distribution)

Example: DZL3-XX-XX-XX-XX-XX-XX-XX-CD-XX-1000L-935K-1C-UNV-XX-DNT-FL1
(1000) x (0.83) x (0.87) ≈ 722 lm (estimated delivered lumens)