


Zyl® 4

DECORATIVE LED PENDANT




14" height shown

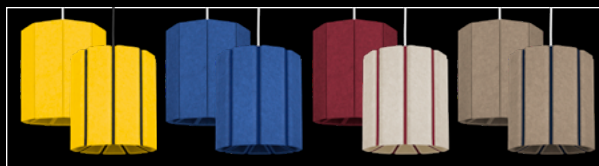


100's of customizable color combinations




Black trim detail




White trim detail



Palladium Silver trim detail



Solid shade detail from below




Zyl 3 companions



Cylinder companions

DIMENSIONAL DATA (continued on page 4)

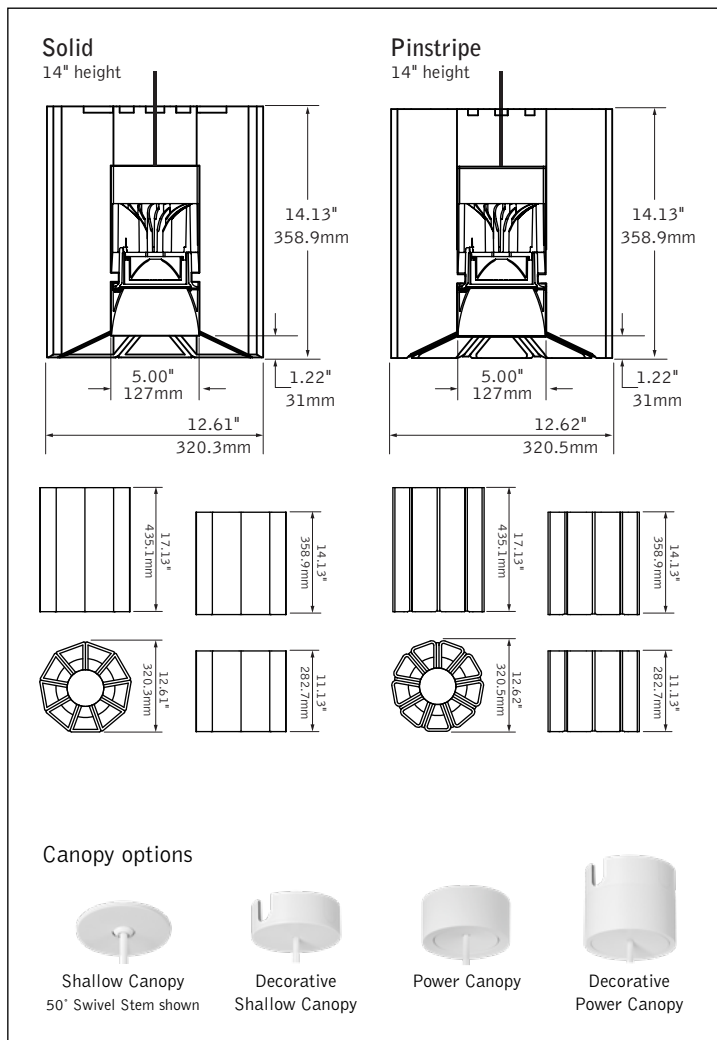

FEATURES

Nominal 12.5" diameter decorative PET felt shaded pendant.

Available in three heights - 11", 14" and 17".


Wide range of color options provides design flexibility and personalization for any project.

Optional Pinstripe detail may be specified in any of the available colors.

50° cut-off available with Solite lens for brightness control and visual comfort.

50° and 80° cut-off available for optimal visual comfort.

PERFORMANCE

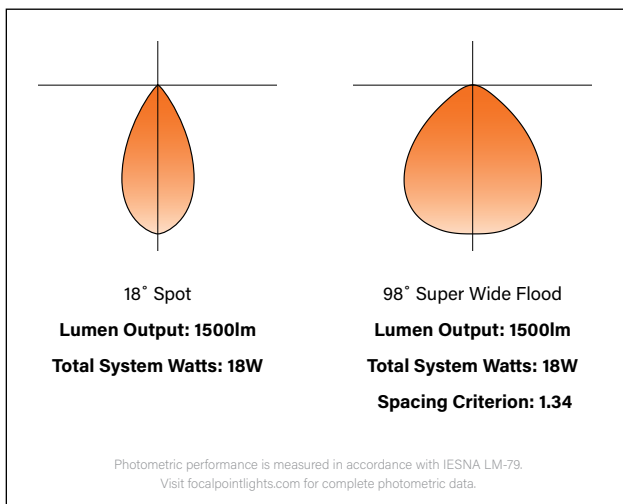

fixture:

project:

SPECIFICATIONS

Acoustic Material

Content	Housing material is 100% polyester containing up to 50% of recycled plastic bottles (PET felt) with an ASTM E-84 Class A / CAN ULC S102 fire rating and is moisture resistant. See page 3 for color offering. Acoustic material colors are subject to change without notice. For the most current color options, please visit focalpointlights.com/acousticsolutions. Lead times may vary depending on color.
Cleaning and Care	Remove dust and debris with a clean, soft, lint-free cloth or vacuum
PET Thickness	9mm
NRC	0.9

LED System

Proprietary LED module with single light emitting source. May be specified in 2700K, 3000K, 3500K or 4000K in CRI>80 or CRI>90. Color accuracy within 2 SDCM. Aluminum heat sink provides appropriate thermal management.

Light Engine Construction

Upper housing is extruded aluminum. Lower reflector is die-cast aluminum. Twist & lock construction leaves no visible fasteners within the knife edge trim. Fixture will not exceed 8.67 lbs.

Optics

Beam spreads achieved with optics that may be easily changed in field.

Lumen Output	Cut-Off Degree	Distribution Beam Spread Spacing Criteria					
		SP	NFL	FL	WFL	VWFL	SWFL
1000 - 1500	50°	18° 0.33	27° 0.48	35° 0.59	54° 0.83	69° 1.02	—
	80°	—	—	—	—	—	98° 1.34
2000 - 3000	50°	—	26° 0.44	41° 0.67	56° 0.83	69° 1.08	—
	80°	—	—	—	—	—	98° 1.34

Electrical

Choice of constant current dimming drivers. Power factor > .9 typical.
L11 & LFP with Shallow Canopy, Integral Driver not Right Light as standard, consult factory.

Emergency

Emergency output — 7W for 90 minutes. Maximum mounting height: 16ft.
J-box cannot be recessed above the ceiling with Emergency Battery.

Labels

UL and cUL listed. Suitable for Dry Locations, indoor use only.

Trim/Canopy/Stem Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Cleaning and Care

Remove dust and debris with a clean, soft, lint-free cloth or vacuum.

Lumen Maintenance

Reported: L70 > 60,000 hours
L80 > 60,000 hours

Calculated: L70 at > 204,000 hours
L80 at > 126,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

PERFORMANCE TABLE

Lumen Output	Delivered Lumens	System Watts	LPW
1000L	1033	11	91
1500L	1509	18	86
2000L	2074	24	88
2500L	2609	31	84
3000L	2906	34	84

3500K, 80CRI, Clear Diffuse, Flood distribution. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.


Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING		DZL4
Luminaire Series		
Zyl 4 Decorative LED Pendant		DZL4
Nominal Height		
11"	11	
14"	14	
17"	17	
Shade Color		---
See page 3 for color offering		
Pinstripe Color		---
See page 3 for color offering		
No Pinstripe		NP
Canopy Type		
Shallow Canopy, Integral Driver		SC
Shallow Canopy with decorative J-box cover, Integral Driver		DSC
(L11 & LFP only)		
Power Canopy		PC
Power Canopy with decorative J-box cover		DPC
Canopy Color		
Black	BK	
White	WH	
Palladium Silver	PS	
Suspension Type		
72" Cable, Straight Feed	(Cut in field)	C72
144" Cable, Straight Feed	(Cut in field)	C144
12", 50° Swivel Stem		B12
18", 50° Swivel Stem		B18
2'- 8' in 1' increments, 50° Swivel Stem		B_
(Specify in inches, example: 8' stem = B96)		
12", Fixed Stem		S12
18", Fixed Stem		S18
2'- 8' in 1' increments, Fixed Stem		S_
(Specify in inches, example: 8' stem = S96)		
Suspension Color		
Black	BK	
White	WH	
Gray	(Cable only)	GRY
Palladium Silver	(Stem only)	PS
Reflector Color		CD
Clear Diffuse		CD
Trim Color		
Black	BK	
White	WH	
Palladium Silver		PS
Lumen Output		
1000 Lumens		1000L
1500 Lumens		1500L
2000 Lumens		2000L
2500 Lumens		2500L
3000 Lumens	(PC & DPC only)	3000L
Color Temperature		
2700K, 80+ CRI or 90+ CRI		27K or 927K
3000K, 80+ CRI or 90+ CRI		30K or 930K
3500K, 80+ CRI or 90+ CRI		35K or 935K
4000K, 80+ CRI or 90+ CRI		40K or 940K
Circuit		1C
Single Circuit		1C
Voltage		
120/277 UNV		UNV
120 Volt		120
277 Volt		277
Control System & Dimming Level		
0-10V - 0% Dimming		LZ1
0-10V - 1% Dimming		L11
Phase Dimming		LFP
(SC only, 120V only, Consult factory for recommended dimmers.)		
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming		LH1
DALI - 0% Dimming		DZ1
DALI - 1% Dimming		D11
Optic		
50° Cut-off Cone	(Not available with SWFL distribution)	DNT
50° Cut-off Cone with Solite Lens	(NFL distribution only)	DNTS
80° Cut-off Cone	(SWFL distribution only)	DSS
Distribution		
Spot	(1000L & 1500L only)	SP
Narrow Flood		NFL
Flood		FL
Wide Flood		WFL
Very Wide Flood		VWFL
Super Wide Flood		SWFL
Factory Options		
Emergency Battery		EMR
(J-box cannot be recessed above the ceiling. Remote test switch.)		

Decorative Finishes



Finish Diagram

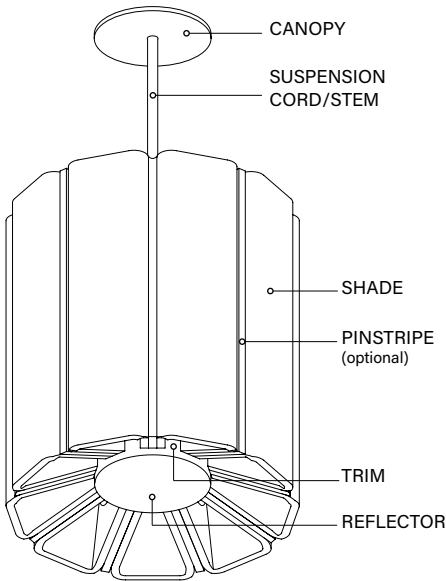

Canopy/Stem/Trim Paint Finishes



Cord Colors



PET Material

STANDARD COLORS



PREMIUM COLORS*



Declare.

9mm PET Felt
Focal Point, LLC

Final Assembly: Chicago, Illinois, USA
Life Expectancy: 30 Year(s)
End of Life Options: Salvageable/Reusable in its Entirety, Recyclable (100%)

Ingredients:

Polyethylene terephthalate: PET; N, N'-Ethylene bisstearamide: Octadecanamide, N,N'-1,2-ethanediybis-; Stearic Acid: Stearic Acid; Antioxidant 1076; Benzenepropanoic acid, 3,5-bis(1-(dimethylethyl)-4-hydroxy-, octadecyl ester; Antioxidant KY-405; Benzenamine, 4-(1-methyl-1-phenylethyl)-N-(4-(1-methyl-1-phenylethyl)phenyl); Titanium Dioxide: Titanium dioxide

Living Building Challenge Criteria: Compliant

I-13 Red List:

- LBC Red List Free
- LBC Red List Approved
- Declared

% Disclosed: 100% at 100ppm
VOC Content: Not Applicable

I-10 Interior Performance: CDPH Standard Method v1.2-2017
I-14 Responsible Sourcing: Not Applicable


FPL-0001
EXP: 01 APR 2025
Original Issue Date: 2020


MANUFACTURER'S RESPONSIBILITY FOR LABEL ACCURACY
INTERNATIONAL LIVING FUTURE INSTITUTE™ living-future.org/declare

*Contact factory for lead time and pricing.


DIMENSIONAL DATA CONTINUED

SC - Shallow Canopy (Integral driver)


 Indicates Driver Location

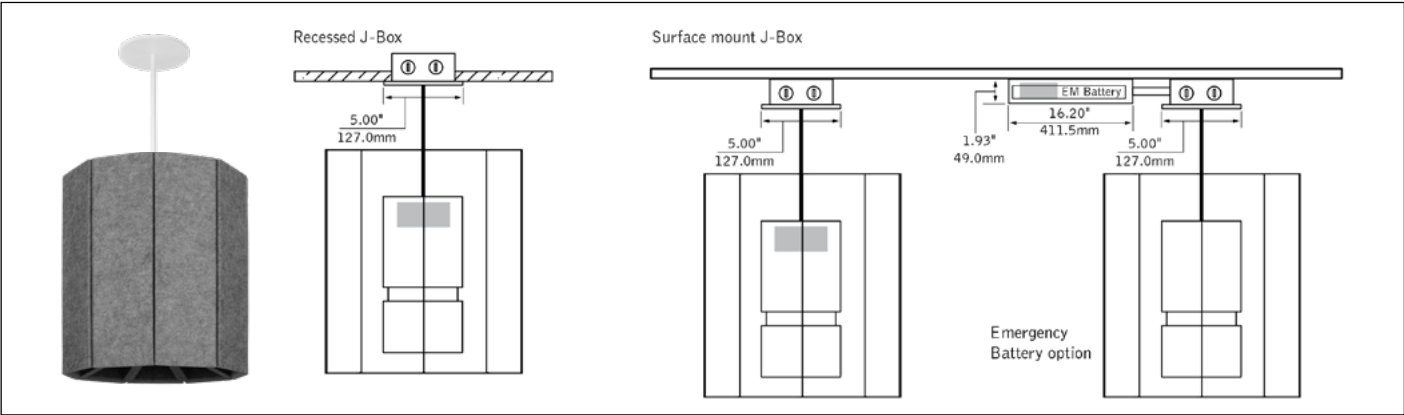


PC - Power Canopy

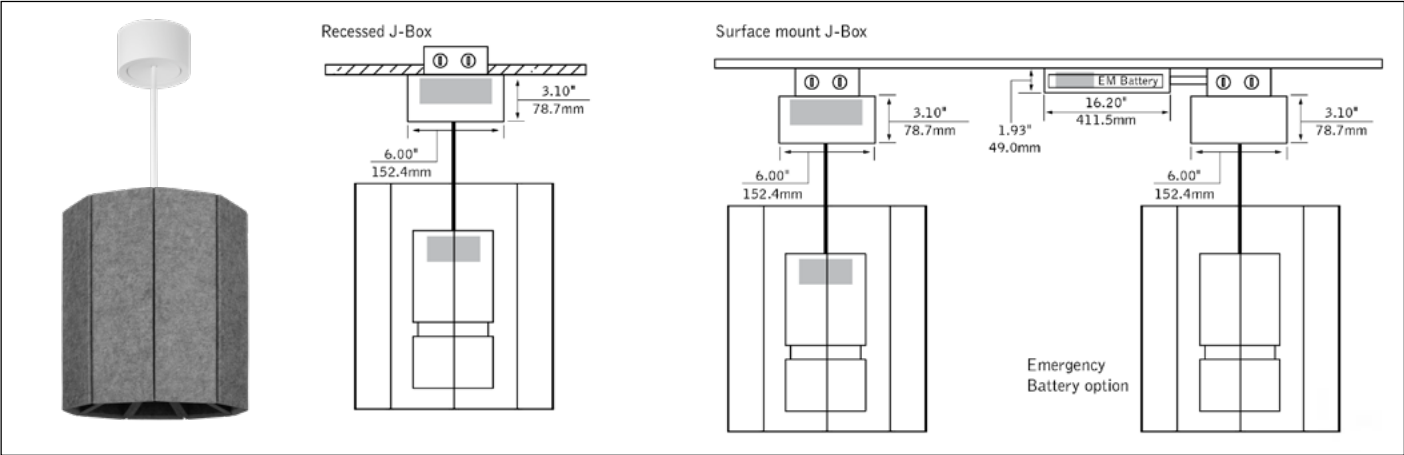

DSC - Shallow Canopy with decorative J-box cover, Integral Driver

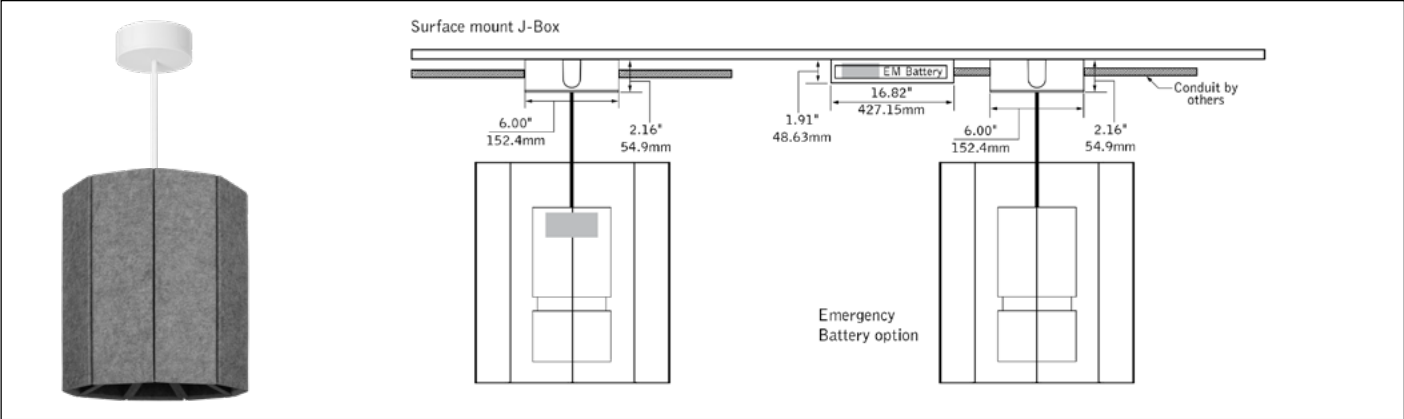


DPC - Power Canopy with decorative J-box cover

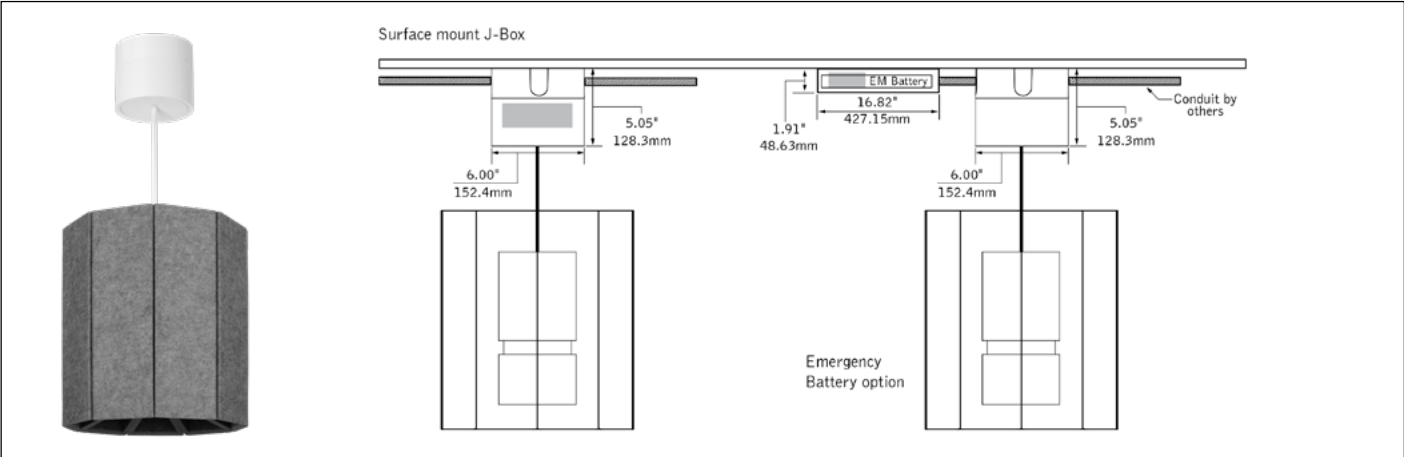

DIMENSIONAL DATA CONTINUED

4" Octogonal J-box required (By others)

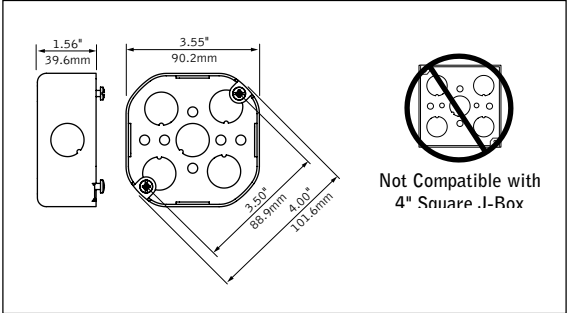

LUMEN MULTIPLIER TABLE

Color Temperature & CRI

Trim Type	Optic	Color Temperature	Multiplier
Round [RD]	ALL	2700K, 80+ CRI [27K]	0.93
		2700K, 90+ CRI [927K]	0.78
		3000K, 80+ CRI [30K]	0.97
		3000K, 90+ CRI [930K]	0.81
		3500K, 80+ CRI [35K]	1.00
		3500K, 90+ CRI [935K]	0.83
		4000K, 80+ CRI [40K]	1.01
		4000K, 90+ CRI [940K]	0.86

Optic & Distribution (1000L - 1500L)

Trim Type	Optic	Distribution	Multiplier
Round [RD]	Tall Cone, 50° cut-off [DNT]	Spot (18°) [SPL]	1.00
		Narrow Flood (27°) [NFL]	0.97
		Flood (35°) [FL]	0.93
		Wide Flood (54°) [WFL]	1.00
		Very Wide Flood (69°) [VWFL]	0.93
	Tall Cone, 50° cut-off with Solite Lens [DNTS]	Narrow Flood (27°) [NFL]	1.00
	Super Short Cone, 80° cut-off [DSS]	Super Wide Flood (98°) [SWFL]	0.85

Optic & Distribution (2000L - 3000L)

Trim Type	Optic	Distribtuon	Multiplier
Round [RD]	Tall Cone, 50° cut-off [DNT]	Narrow Flood (26°) [NFL]	0.98
		Flood (41°) [FL]	0.92
		Wide Flood (56°) [WFL]	1.00
		Very Wide Flood (69°) [VWFL]	0.89
	Tall Cone, 50° cut-off with Solite Lens [DNTS]	Narrow Flood (26°) [NFL]	1.11
	Super Short Cone, 80° cut-off [DSS]	Super Wide Flood (98°) [SWFL]	0.83

Multiplier tables are provided to aid with estimation of lumen levels across options. Apply multipliers against ordered Lumen Output to estimate Delivered Lumens. Refer to IES files for most accurate photometric information.

How To Use Lumen Multipliers

Formula: (Lumen Output Value) x (Color Temperature & CRI) x (Optic & Distribution)

Example: DZL4-XX-XX-XX-XX-XX-XX-XX-CD-XX-1000L-935K-1C-UNV-XX-DNT-FL
(1000) x (0.83) x (0.93) ≈ 726 lm (estimated delivered lumens)