



# Amica® 2 1x2

LED




lens detail




air return


## DIMENSIONAL DATA

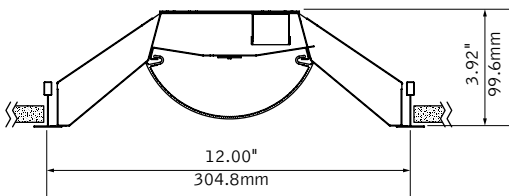

### led options



Standard  
(1 LED Board)



High Efficiency  
(2 LED Boards)

## FEATURES

Architectural recessed LED luminaire with classic lines to complement architecture.

Center ribbed diffuser masks LED brightness to create even illumination.


3.9" housing depth ideal for shallow plenum applications.

Access from below the ceiling for easy maintenance.

Connected Solutions: Integrates with wired and wireless building control systems.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

## PERFORMANCE



### PRODUCT OVERVIEW

Lumen Output:	2000-5000lm
Wattage:	16-40
LPW:	124-133
SDCM:	3

High Performance  
2000 Lumens (2000LH)


**Delivered Lumens: 2000lm**

**Total System Watts: 16W**


Photometric performance is measured in accordance with IESNA LM-79. Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.

MOUNTING INFORMATION


grid



9/16" tee




15/16" tee




slot tee

drywall frame kit

specify "F" Drywall Frame Kit for drywall ceiling conditions.



Use tie-wire or screws to secure frame kit.



Cut out dimensions:  
1': Min: 12.25"  
Max: 12.56"  
2': Min: 24.25"  
Max: 24.56"

SPECIFICATIONS

LED System

LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 3000K, 3500K or 4000K with CRI>80, 3 SDCM. LED modules and drivers are replaceable from below.

Construction

One piece 24 Ga. steel reflector and housing. Bottom access 24 Ga. steel driver compartment. Top access plate for electrical connection. Positional brackets supplied as standard. Unit weight: 6.6 lbs.

Optic

24 Ga. steel reflectors finished in matte satin white powder coat. .084" thick frosted white acrylic diffuser with linear micro-prism pattern.

Electrical

Standard 120-277V driver includes 0-10V analog dimming. Power factor > .9. LD1 not Right Light as standard, consult factory. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Emergency

Emergency battery output—10 watts for 90 minutes. Maximum mounting height: 19.9ft Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFS1, NLT1, CLM1, NXE1, WLXP) requires a UL924 compliant device, consult factory.

Labels

UL and cUL Listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment. Optional Anti-Microbial paint finish available.

Lumen Maintenance

Reported: L70 at > 60,000 hours

Calculated: L70 at 145,000 hours

L80 at > 60,000 hours

L80 at 91,000 hours

(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5 year limited warranty.




















PERFORMANCE CHART

Delivered Lumens		Tested System Watts	LPW	Lumen Multipliers		
				CCT	CRI	Multiplier
2000 Lumens	2000L	16	124	3000K	80	0.81
	2000LH	16	131		90	0.93
2500 Lumens	2500L	20	124	3500K	80	1.00
	2500LH	20	128		90	0.96
3000 Lumens	3000L	23	128	4000K	80	0.85
	3000LH	22	133		90	0.98
3500 Lumens	3500L	28	126			
	3500LH	27	133			
4000 Lumens	4000L	32	124			
	4000LH	31	132			
4500 Lumens	4500LH	35	130			
5000 Lumens	5000LH	40	130			

Based on 3500K, 80 CRI. \*Lumen output may vary +/- 8%. Actual wattage may vary +/- 5%  
Focal Point LLC reserves the right to change specifications for product improvement without notification.

Amica 2	FAM2	
Nominal Size	12	
1' x 2'	12	
Shielding	ACR	
Ribbed Acrylic Diffuser	ACR	
Lumen Output		
Standard (1 LED Board)		
2000 Lumens	2000L	
2500 Lumens	2500L	
3000 Lumens	3000L	
3500 Lumens	3500L	
4000 Lumens	4000L	
High Efficiency (2 LED Boards)		
2000 Lumens	2000LH	
2500 Lumens	2500LH	
3000 Lumens	3000LH	
3500 Lumens	3500LH	
4000 Lumens	4000LH	
4500 Lumens	4500LH	
5000 Lumens	5000LH	
Color Temperature		
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
Circuit	1C	
Single Circuit	1C	
Voltage		
120/277 UNV Volt	UNV	
347 Volt	347	
(LD1, CLM1 only: Not available with EM.)		
Low Voltage	LV	
Control System & Dimming Level		
0-10V - 10% Dimming (Not Right Light as standard, consult factory)	LD1	
0-10V - 1% Dimming	L11	
Low Voltage, PoE compatible (No driver. Not available with EM. LV Voltage only)	LVN	
Lutron Hi-Lume EcoSystem (LDE1)	LH1	
1% Dimming	D11	
DALI - 1% Dimming	SD5	
Step Dimming	DLM1	
Wattstopper DLM - 1% Dimming		
Wattstopper Fixture Sensor	LMFS1	
Low Density - 1% Dimming		
Wattstopper Fixture Sensor	LMFS1	
High Density - 1% Dimming		
Acuity nLight <sup>®</sup> - 1% Dimming (Not available with CP)	NLT1	
Encelium CLM Connected Lighting Module - 1% Dimming	CLM1	
Current NX Enabled - 1% Dimming	NXE1	
WaveLinx Pro - 1% Dimming	WLXP	
Mounting		
Grid	G	
Drywall Frame Kit (Not available with DLM1, CLM1, NXE1 or NLT1) (Cut out dimensions: Min: 12.25"/Max: 12.56" Min: 24.25"/Max: 24.56")	F	
Surface Mount (Not available with DLM1, CLM1, NXE1 or NLT1)	SM	
24" Aircraft Cable	C24	
48" Aircraft Cable	C48	
96" Aircraft Cable	C96	
Factory Options		
Air Return (Overall height for luminaire with Air Return is 4.4")	AR	
Chicago Plenum (Not available with flex whip)	CP	
Emergency Battery <sup>1</sup> with Integral Test Switch	EM	
6' New York City Flex Whip (120V)	FN1Y	
6' New York City Flex Whip (277V)	FN2Y	
6' Flex Whip	FW	
NSF Listed	NSF	
Finish		
Matte Satin White	WH	
Matte Satin White Anti-Microbial	WHA	

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†

Connected Solution		Ordering Code	Model #**	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers
 <b>legrand®</b>  WATTSTOPPER® 		DLM1	LMFC-011	DLM	DLM	Enabled	No	Wired 	<b>Advance by Signify,</b> Optotronic by eldoLED
		LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Enabled	No	Wireless	<b>Advance by Signify</b>
		LMFSD	LMFS-601						<b>Optotronic by eldoLED (Dexal)</b>
 <b>COOPER</b> Lighting Solutions		WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Enabled	No	Wireless (WaveLinx Pro Wireless Area Controller)	<b>Advance by Signify</b>
 <b>CRESTRON</b>		D11	Specified Driver	DALI	Crestron Züm Wireless & SpaceBuilder	Enabled	No	Wired	<b>eldoLED ECOdrive</b>
		L11		0-10V					<b>Advance by Signify</b>
 <b>ENCELIUM</b>		CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled	No	Wireless	<b>Optotronic by eldoLED</b> Advance by Signify
 <b>LUTRON</b>		LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	No	Wired	<b>Lutron Hi-Lume</b>
 <b>nLIGHT</b>		NLT1	nEPS-60-IO	nLight	nLight	Enabled	No	Wired 	<b>eldoLED ECOdrive,</b> eldoLED SOLOdrive
								Wired 	
 <b>NX LIGHTING CONTROLS</b>		NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled	No	Wired 	<b>Optotronic by eldoLED</b>

\*Not all compatible networks may be listed. \*\*For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.  
†Controls systems supplied by others.