

# Avenue® 6

LED



corrugated  
regressed trim





solid  
regressed trim




flush lens

## DIMENSIONAL DATA

### grid mount (regress trim shown)



### drywall flange

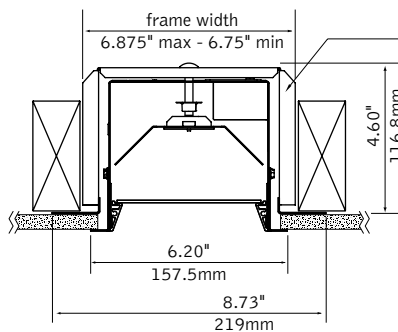

Mounting yoke  
must be installed  
prior to drywall.

## FEATURES


Avenue® 6 LED is designed to function with specialty 6" ceiling systems, standard grid or drywall.

Shielding options include corrugated or solid regressed trim or flush lens.

Avenue® 6 LED provides an integrated lighting solution that complements the ceiling and entire space while providing comfortable general illumination.

Connected Solutions: Integrates with wired and wireless building lighting control systems.

## DISTRIBUTION




625 Lumens per foot  
4' Housing with Flush Lens  
**Delivered Lumens: 2727lm**  
**Total System Watts: 26.1W**

Photometric performance is measured in accordance with IESNA LM-79.  
Visit [focalpointlights.com](http://focalpointlights.com) for complete photometric data.

fixture:

project:

MOUNTING INFORMATION

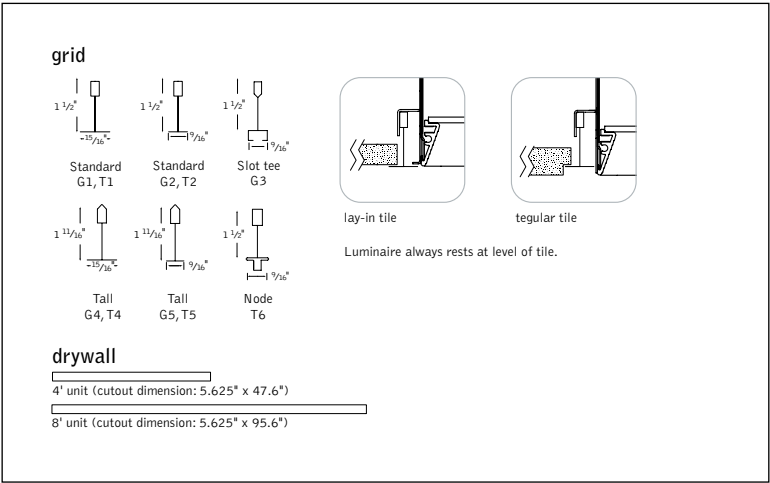

SPECIFICATIONS

LED System

Proprietary linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. LEDs are placed to promote a uniform appearance. Available in 2700K, 3000K, 3500K or 4000K with CRI>80 or CRI>90, 3 SDCM. LED modules and drivers are replaceable from below.

Construction

One-piece 20 Ga. steel housing. Thermally protected housing for new construction applications without direct contact with insulation. Insulation to be kept 3" away from housing. Corrugated and solid regressed trim constructed of 6063-T5 extruded aluminum finished in Matte Satin White. 20 Ga. steel, universal flange rail finished in Matte Satin White. Positional brackets supplied as standard. 4' unit weight: 15 lbs.

Optic

22 Ga. steel reflectors finished in High Reflectance White powder coat. Acrylic lens diffuser .118" thick, frosted clear.

Electrical

Thru-wiring not available.

Emergency

Emergency battery output - 10 watts for 90 minutes. Maximum mounting height: 20ft. Emergency Circuit with Connected Solutions (DLM1, LMFS1, LMFSD, NLT1, CLM1, NXE1, WLXP) shipped standard with leads to connect UL924 compliant device, by others.

Labels

UL and cUL Listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 > 60,000 hours      Calculated: L70 at > 68,000 hours  
L90 > 21,000 hours      L90 at > 21,000 hours  
(Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.)

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART



















Shielding	Lumen Output	Delivered Lumens	System Watts	LPW
Flush Lens	375LF	1535	14.4	106
	625LF	2727	26.1	104
	875LF	3866	37.7	102
	1000LF	4432	43.8	101

Based on 3500K, 80 CRI, 4' lengths. Lumen Multipliers: Solid Regressed Trim (SR) = 1.3, 90+ CRI = 0.87. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%.

Focal Point LLC reserves the right to change specifications for product improvement without notification.

ORDERING		FAV6L
Luminaire Series		
Avenue 6 LED	FAV6L	
Shielding		
Corrugated Regressed Trim Frst.Lns	CR	
Solid Regressed Trim Frosted Lens	SR	
Flush Frosted Lens	FL	
LED Output		
375 Lumens per foot	375LF	
625 Lumens per foot	625LF	
875 Lumens per foot	875LF	
1000 Lumens per foot	1000LF	
Color Temperature		
2700K, 80+ CRI or 90+ CRI	27K or 927K	
3000K, 80+ CRI or 90+ CRI	30K or 930K	
3500K, 80+ CRI or 90+ CRI	35K or 935K	
4000K, 80+ CRI or 90+ CRI	40K or 940K	
Circuits		1C
Single Circuit	1C	
Voltage		UNV
120/277 UNV Volt	UNV	
Control System & Dimming Level		
0-10V - 10% Dimming	LD1	
0-10V - 1% Dimming	L11	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
Step Dimming	SD5	
Wattstopper DLM - 1% Dimming (Not available with CP)	DLM1	
Wattstopper Fixture Sensor Low Density - 1% Dimming	LMFS1	
Wattstopper Fixture Sensor High Density - 1% Dimming	LMFSD	
Acuity nLight - 1% Dimming (Not available with CP)	NLT1	
Encelium CLM Connected Lighting Module - 1% Dimming	CLM1	
Current NX Enabled - 1% Dimming (Not available with CP)	NXE1	
WaveLinx Pro - 1% Dimming	WLXP	
Ceiling Configurations		
Drywall Flange (Not available with LMFS1, LMFSD, NXE1, WLXP, CLM1, DLM1 or NLT1)	F	
Std. 15/16" Lay-in	G1	
Std. 15/16" Tegular	T1	
Std. 9/16" Lay-in	G2	
Std. 9/16" Tegular	T2	
9/16" Slot-tee Tegular	G3	
Tall 15/16" Lay-in	G4	
Tall 15/16" Tegular	T4	
Tall 9/16" Lay-in	G5	
Tall 9/16" Tegular	T5	
Node 9/16" Tegular	T6	
Factory Options		
Chicago Plenum (Not available with flex whip)	CP	
Emergency Battery	EM	
6' New York City Flex Whip (120V)	FN1	
6' New York City Flex Whip (277V)	FN2	
6' Flex Whip	FW	
Finish		WH
Matte White Housing	WH	
Luminaire Length		
4' Nominal Housing	4'	
8' Nominal Housing	8'	

Focal Point provides flexibility in meeting the needs of each project by integrating with several building lighting control systems. A variety of sensors, drivers and other components can be specified that allow the luminaires to communicate with wired and wireless networks. All zoning can be digitally reconfigured through the application software. Daylight harvesting, occupancy sensing, integration with HVAC systems, and individual controls enable the monitoring and modulating of light levels and temperature in order to save energy, reduce costs and maximize occupants' comfort. All Connected Solutions luminaires require a compatible building control system.†

Connected Solution		Ordering Code	Model #**	Protocol	Compatible Networks*	Occupancy & Daylight	Temperature Reporting	Communication to Luminaire	Drivers
  WATTSTOPPER®		DLM1	LMFC-011	DLM	DLM	Enabled	No	Wired 	<b>Advance by Signify</b> , Optotronic by eldoLED
		LMFS1	LMFS-601 & LMFI-111	DLM Wireless	DLM	Enabled	No	Wireless	<b>Advance by Signify</b>
		LMFSD	LMFS-601						<b>Optotronic by eldoLED (Dexal)</b>
		WLXP	OEM-WAA	WaveLinx Wireless	WaveLinx Pro Trellix	Enabled	No	Wireless (WaveLinx Pro Wireless Area Controller)	<b>Advance by Signify</b>
	 <small>Connections located under access panel.</small>	L11	Specified Driver	0-10V	Crestron Züm Wireless & SpaceBuilder	Enabled	No	Wired	<b>Advance by Signify</b>
		CLM1	ZBHA-CLM-DIM-ENC	ZigBee	Encelium X Light Management System	Enabled	No	Wireless	<b>Optotronic by eldoLED</b> Advance by Signify
	 <small>Connections located under access panel.</small>	LH1	LDE1	EcoSystem	Quantum, Energi Savr Node, Energi TriPak	Enabled	No	Wired	<b>Lutron Hi-Lume</b>
	 <small>Connections located under access panel.</small>	NLT1	nEPS-60-IO	nLight	nLight	Enabled	No	Wired 	<b>eldoLED ECOdrive</b> , eldoLED SOLOdrive
	 <small>NXE1 adds 1.00" to overall height.</small>	NXE1	NXFM-LV	NX	NX Distributed Intelligence	Enabled	No	Wired 	<b>Optotronic by eldoLED</b>

\*Not all compatible networks may be listed. \*\*For performance data and additional control system details please visit the connected solutions manufacturer websites. Primary drivers are listed in **bold**. To specify a particular driver please consult factory.  
†Controls systems supplied by others.