




FOCAL POINT®



COVERT®

HIDDEN, YET ESSENTIAL.

ATTAIN AMBIANCE AND APPLICATION EFFICIENCY WITHOUT STRETCHING YOUR ENERGY BUDGET. ADJUSTABILITY AND A CHOICE OF FOUR SMALL PROFILES MAKES COVERT A WORKHORSE OF AN LED COVE LIGHT, ACCOMMODATING COVE ARCHITECTURES OF ALL KINDS WITH EASE. DRIVEN BY PERFORMANCE, COVERT BRINGS CONCEALED COVE LIGHTING BACK INTO THE DESIGNER'S TOOLKIT.

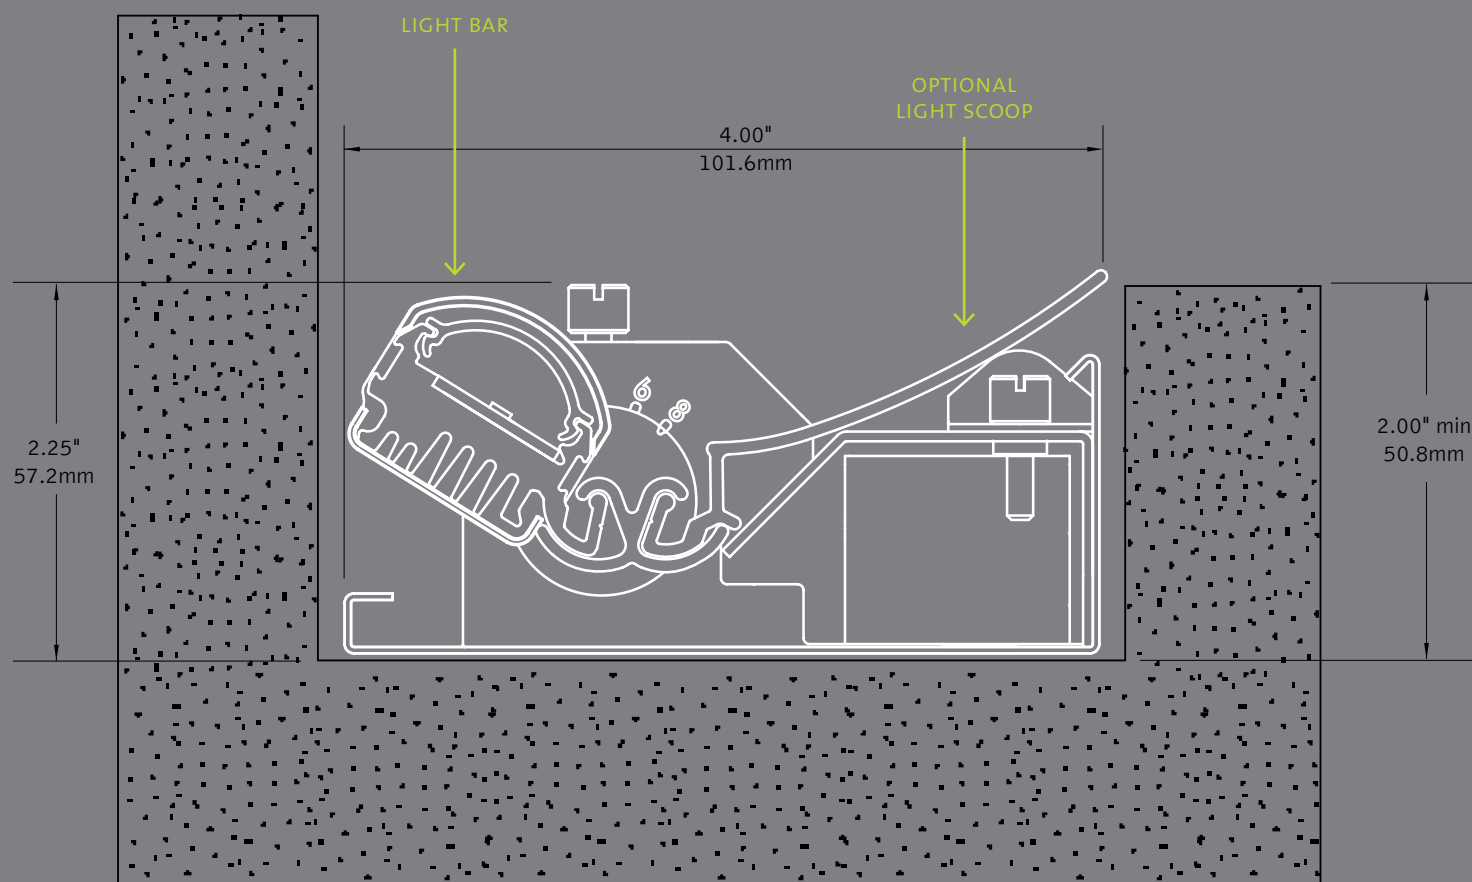


HORIZONTAL BASE WITH ADJUSTABLE LIGHT SCOOP SHOWN ACTUAL SIZE

COVERT: LED COVE LIGHT

INFINITE ADJUSTMENT ALLOWS FOR PRECISION AIMING

NO ADJUSTMENT

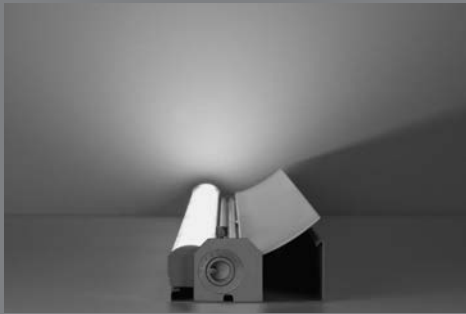

0 LIGHT BAR

LIGHT SCOOP 0

Light Bar adjustment: Tilt the light bar to direct the beam, maximizing forward throw and putting the light where you need it.

Light Scoop adjustment: Lift the scoop to direct more light toward the ceiling, a perfect effect with sloped or arched ceilings.

Dual adjustment: Dial in the ideal distribution for each cove application by adjusting both of Covert's aim-able elements. Versatility is built in, helping designers to achieve the right result every time.

LIGHT BAR ADJUSTMENT



0

0



4

0



8

0

LIGHT SCOOP ADJUSTMENT




0

2



0

4

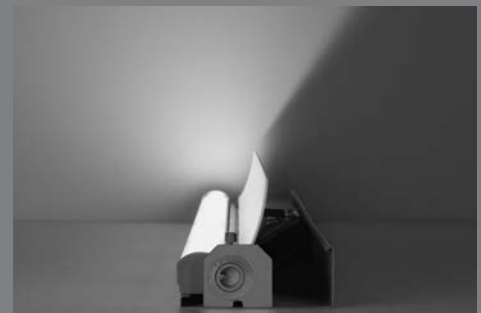

0

8

DUAL ADJUSTMENT



4

6



4

2



8

8

MANUAL LOCKING ADJUSTMENTS

ADJUSTMENT DIAL EXTERIOR



ADJUSTMENT DIAL INTERIOR



LIGHT SCOOP ADJUSTER




A dial and adjuster on the housing indicates the position of the light bar or light scoop from position 0 to 8. To adjust, simply loosen the thumbscrew and move by hand to the desired position then tighten the screw. Position indicators are visible from above.


COVERT WORKS – IN ANY COVE

From shallow or narrow to sloped or arched, this versatile design shines in cove architectures of all kinds. Specify profiles with a Light Scoop for more beam shaping control, especially with sloped ceilings.


CONCEALED CORNER APPLICATIONS

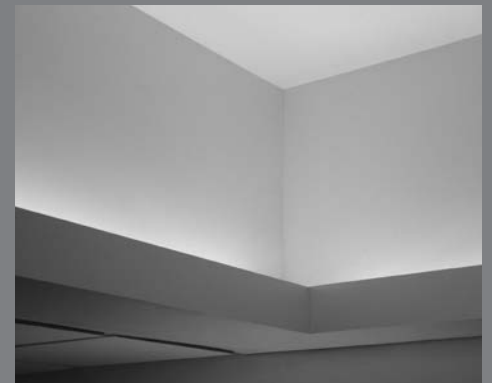


Covert's optic allows for placement of luminaires in corner conditions.



LESS THAN 24" COVE,
SPECIFY NO LIGHT SCOOP

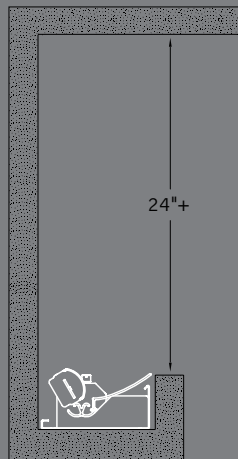

24" OR MORE COVE, SPECIFY
LIGHT SCOOP AS NEEDED.

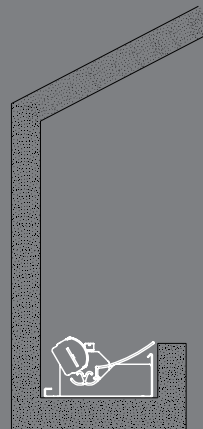

SLOPED CEILINGS, ALWAYS
SPECIFY LIGHT SCOOP

*8" CLEARANCE ABOVE
COVE RECOMMENDED
FOR ALL APPLICATIONS

LED ADVANTAGE

Directional LEDs push light out of the cove and into the space, making the most of this low wattage design.


Other system features:

- LOW MAINTENANCE FOR HARD TO REACH COVES
- CONTINUOUS, SHADOW-FREE APPEARANCE – NO SOCKET SHADOWS
- SMOOTH DISTRIBUTION
- 0-10V - 10% DIMMING
- OVER 100 LPW DELIVERED
- 80+ CRI, ± 3 SDCM
- L70 AT 50,000 HOURS
- 5 YEAR LIMITED WARRANTY



HORIZONTAL BASE WITH LIGHT SCOOP

LIGHT BAR: 0 | LIGHT SCOOP: 0




1000 LUMENS / FOOT
1352 @ 165° | 111 LPW



HORIZONTAL BASE WITH LIGHT SCOOP

LIGHT BAR: 6 | LIGHT SCOOP: 0

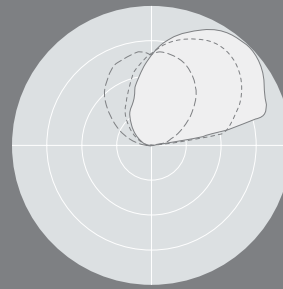


1000 LUMENS / FOOT



VERTICAL BASE

LIGHT BAR: 6



1000 LUMENS / FOOT

4' PROFILE	LUMEN OUTPUT	ADJUSTMENT SETTINGS		DELIVERED LUMENS	TOTAL SYSTEM WATTS	PEAK CANDELA
		LIGHT BAR	LIGHT SCOOP			
HS - HORIZONTAL BASE WITH ADJUSTABLE LIGHT SCOOP	500 LM/FT	0	0	2000	20	675 @ 165°
	750 LM/FT	0	0	3000	28	958 @ 165°
	1000 LM/FT	0	0	3988	36	1410 @ 165°
	1250 LM/FT	0	0	5000	46	1778 @ 165°


RIGHT LIGHT™

Right Light provides a broad range of standard delivered lumen outputs that stay consistent as technology upgrades occur. In addition, "custom tuning" of wattage and lumen outputs can be specified within the standard range.


COVERT DELIVERS LIGHT WHERE YOU NEED IT FOR FEWER WATTS THAN TRADITIONAL FLUORESCENT COVE LIGHTING.

PROFILES


HORIZONTAL BASE WITH
ADJUSTABLE LIGHT SCOOP

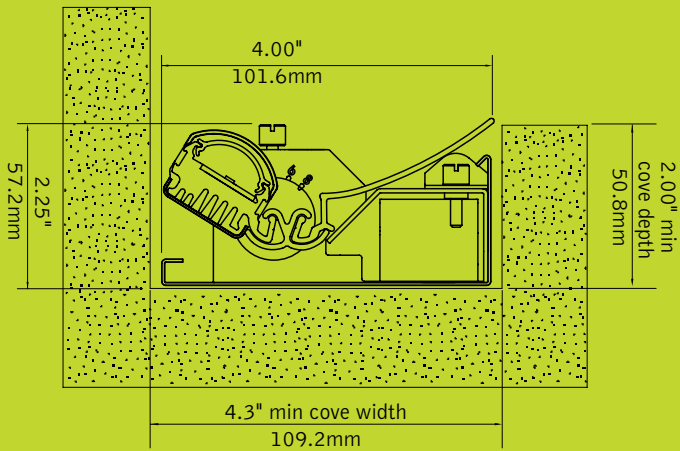


HORIZONTAL BASE

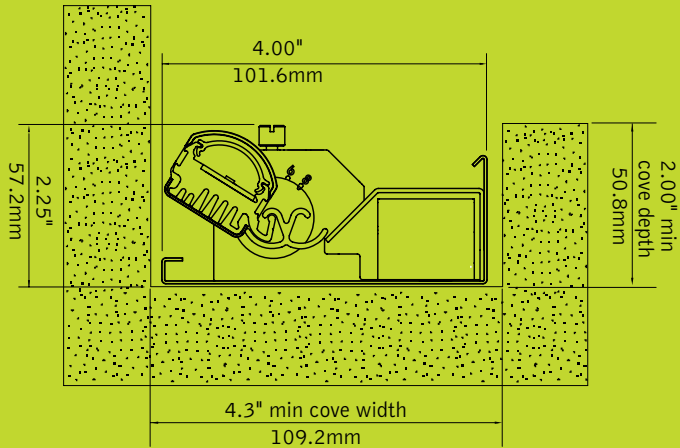

VERTICAL BASE

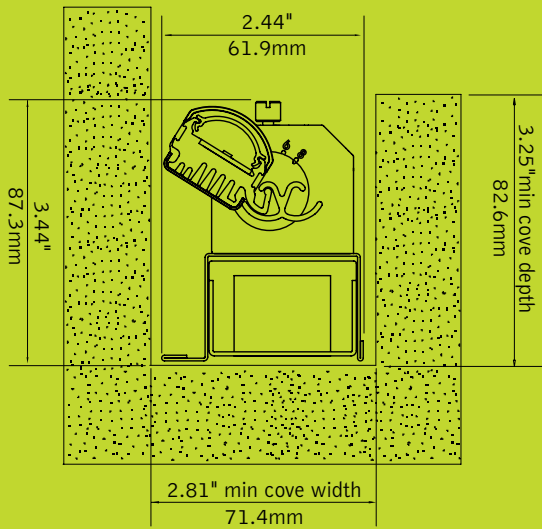

FEED LOCATION

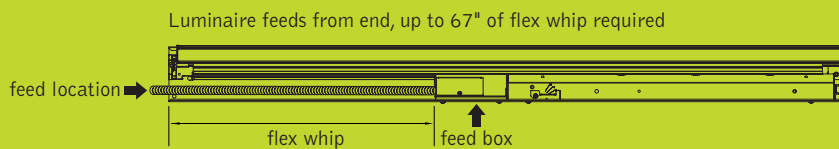

ORDERING

Luminaire Series	FCOL	FCOL
Covert - Adjustable LED Cove Light	FCOL	
Profile		
Horizontal base	HN	
Horizontal base wth light scoop	HS	
Vertical base	VN	
LED System		
500 Lumens per foot	500LF	
750 Lumens per foot	750LF	
1000 Lumens per foot	1000LF	
1250 Lumens per foot	1250LF	
Color Temperature		
3000K	30K	
3500K	35K	
4000K	40K	
Circuits		
Single Circuit	1C	
Voltage		
120 Volt	120	
277 Volt	277	
Driver		
0-10V - 1% Dimming	LD1	
Lutron A-Series	L3D	
1% EcoSystem Digital <small>(Consult factory for 3-wire dimming)</small>		
Mounting		
Cove	CV	
Nominal Luminaire Length		
Specify in 1' increments	XX'	
<small>(Consult factory for limitations regarding 2' units, corners, patterns & curved cove applications. Multiple feeds may be required beyond 64'. Consult factory for specifics.)</small>		



Follow @focalpointlight

©2015 Focal Point, LLC. 4141 S. Pulaski Road, Chicago, IL 60632
T 773.247.9494 | www.focalpointlights.com

All rights reserved. "Focal Point", "The Art of Light", "Covert" and the light-ray graphic are trademarks or registered trademarks of Focal Point, LLC.

Visit focalpointlights.com for specification and other details on our entire catalog.