



Dart

LED WALL MOUNT

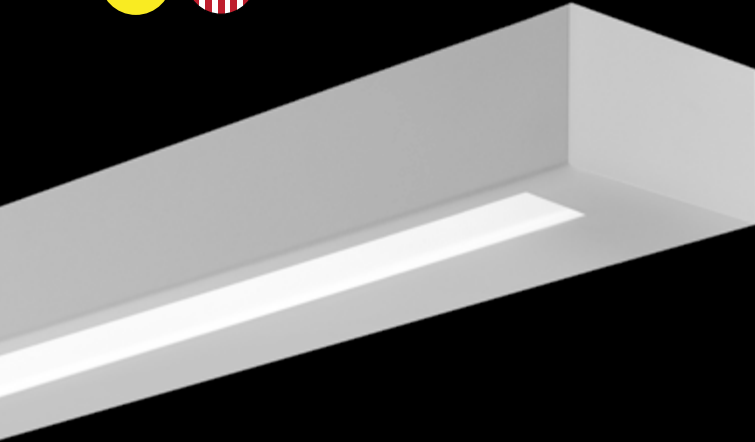


acrylic diffuser




suspended companion

DIMENSIONAL DATA

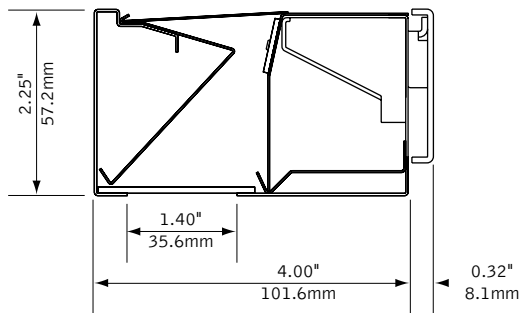

fixture information

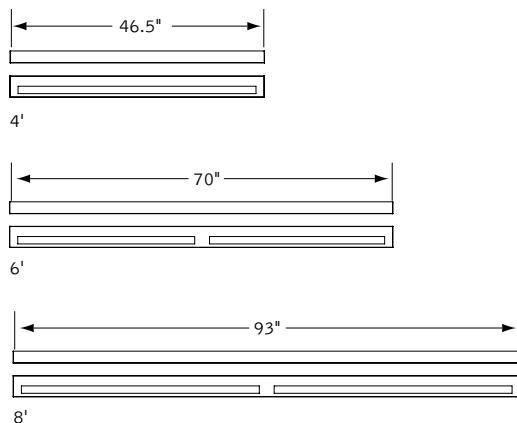


FEATURES

Miniature wall mount direct/indirect LED luminaire.

Features Gradient Optic which softens cut-off line on surrounding walls and other vertical structures. Beam Smoothing Diffuser provides additional softening to the beam.

PERFORMANCE



PRODUCT OVERVIEW

Lumen Output:	2500-3000lm
Wattage:	26-37W
LPW:	93-98
SDCM:	3


4' unit
Nominal Output: 625 lm/ft
Delivered Lumens: 2500lm
Total System Watts: 26W

Photometric performance is measured in accordance with IESNA LM-79.
Visit focalpointlights.com for complete photometric data.

fixture:

project:

DETAILS

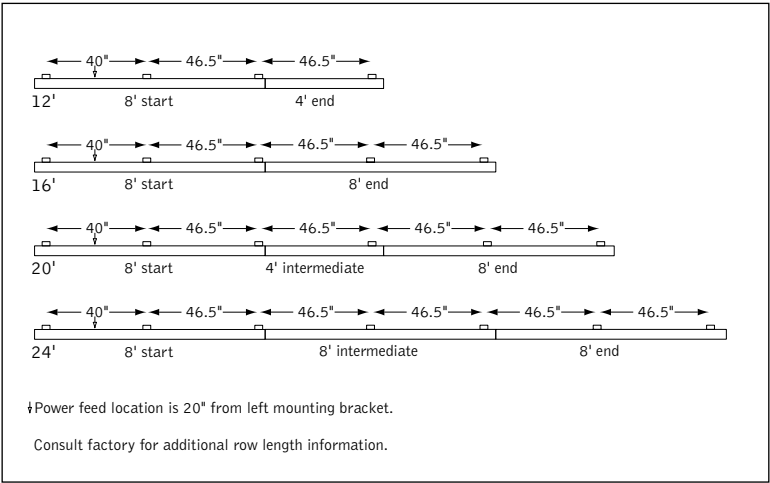

SPECIFICATIONS

LED Systems

Linear LED module incorporates premium LEDs on a robust platform to achieve excellent thermal management. Available in 3000K, 3500K, 4000K with CRI>80, 3SDCM. LED boards and drivers are replaceable.

Construction

One-piece 22 Ga. steel housing. Steel end caps attach flush to housing. For row installation, internal brackets form hairline joint. All luminaires are provided with single-point suspension mounted on 48" or 96" centers. 4' unit weight: 8lbs. 8' unit weight: 19lbs.

Optic

Reflector fabricated of low iridescent, semi specular premium grade aluminum. 0.125" thick acrylic lens. 0.42" smooth acrylic Beam Smoothing Diffuser (dust cover) standard.

Electrical

Luminaires are pre-wired with factory installed branch circuit wiring and over-molded quick connects. Standard 120-277V constant current driver includes 0-10V analog dimming. Power factor > .9.

Emergency Battery

Emergency output—12W for 90 minutes for all available models.

Labels

UL and cUL listed. Suitable for Dry or Damp Locations, indoor use only.

Finish

Polyester powder coat applied over a multi-stage pre-treatment.

Lumen Maintenance

Reported: L70 at 60,000 hours Calculated: L70 at 130,000 hours
Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED system rated for operation in ambient environments up to 25°C. 5-year limited warranty.

4' PERFORMANCE CHART

Lumens per Foot	Delivered Lumens	System Watts	LPW
625LF	2500	26	98
750LF	3000	30	97
875LF	3500	37	93

Based on 3500K. Lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

ORDERING

Fixture Series	FDALW	FDALW
Dart LED	FDALW	
Shielding		AC
Acrylic Diffuser	AC	
Lumen Output		
625 Lumens per foot	625LF	
750 Lumens per foot	750LF	
875 Lumens per foot	875LF	
Color Temperature		
3000K	30K	
3500K	35K	
4000K	40K	
Circuits		1C
Single Circuit	1C	
Voltage		
120/277 UNV Volt	UNV	
347 Volt	347	
(LD1 only)		
Control System & Dimming Level		
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
DALI - 1% Dimming	D11	
DALI - 10% Dimming	DD1	
Step Dimming	SD5	
(Not available with 625LF)		
Mounting		WM
Wall Mount	WM	
Factory Options		
Emergency Circuit	EC	
Emergency Battery	EM	
(Sensor options available—consult factory)		
Finish		
Titanium Silver	TS	
Matte Satin White	WH	
Fixture Run Length		
4'	4'	
8'	8'	
12' (8'+4')	12'	
16' (8'+8')	16'	
20' (8'+4'+8')	20'	
24' (8'+8'+8')	24'	
(Individual units may not be field modified for continuous row mount)		