Equation® 2

FEQ2-22 | FEQ2-14 | FEQ-24









BEFORE YOU BEGIN

- Luminaires must be installed by a qualified electrician (check with local and national codes for proper installation).
- To prevent electrical shock, disconnect electrical supply before installation or servicing.
- Contractor is responsible for adequately reinforcing walls and/or ceilings to support fixture weight.
- Focal Point, LLC accepts no responsibility for inadequately reinforced walls and/or ceilings.
- The information contained in this drawing is the sole property of Focal Point, LLC. Any reproduction in part or whole without the written permission of Focal Point, LLC is prohibited.

INSTRUCTION KEY



ATTENTION



SEE ADDITIONAL INSTRUCTIONS



POWER OFF



POWER ON

COMPONENT KEY



EQUATION 2




EQUATION 2

FEQ2-14




EQUATION 2 - Air Return (AR)

FEQ2-22




EQUATION 2 - Air Return (AR)

FEQ2-14



FEQ2-24



EQUATION 2 - Air Return (AR)

FEQ2-24



AVOID ALL CONTACT WITH LED SURFACE, LEDS ARE EASILY DAMAGED!

GRID - 9/16" & 15/16"





FOR SPECIFIC INSTALLATIONS SEE:


PAGE 1 - 9/16 & 15/16" GRID


PAGE 2 - SLOT TEE


PAGE 4 - AIR RETURN
































SLOT TEE












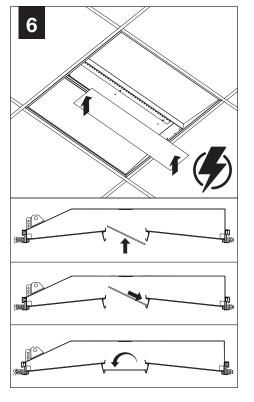


EMERGENCY





SEE BATTERY MANUFACTURER INSTRUCTIONS


EMERGENCY MAXIMUM MOUNTING HEIGHT: 20'

DRIVER SERVICE












GRID - AIR RETURN INSTALLATION














ACUITY nLIGHT)











WATTSTOPPER

