

Groove™ G

FLUORESCENT



white prismatic



clear prismatic with metalized interior



clear prismatic



frosted green diffusion disk



frosted white diffusion disk




conical lens



sconce companion

DIMENSIONAL DATA

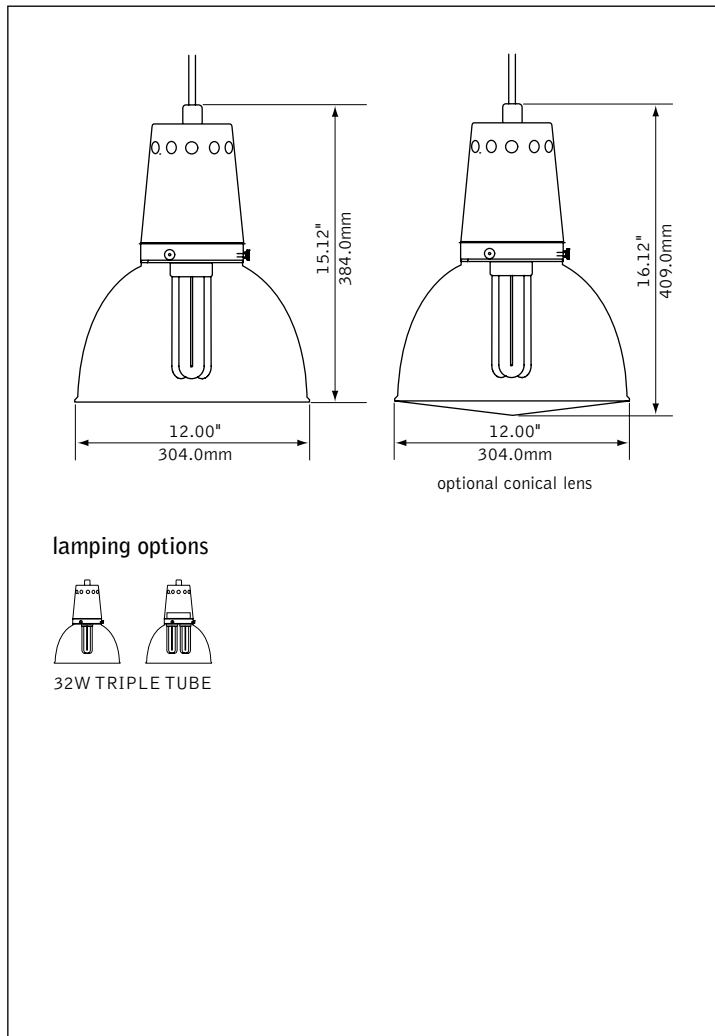


FEATURES

Pendant mount decorative compact fluorescent luminaire.

Housing and canopy are high quality spun aluminum with acrylic refractor.

Ideally suited for retail, hospitality, lobbies, corridors, open ceiling areas and other specialty applications.

PERFORMANCE

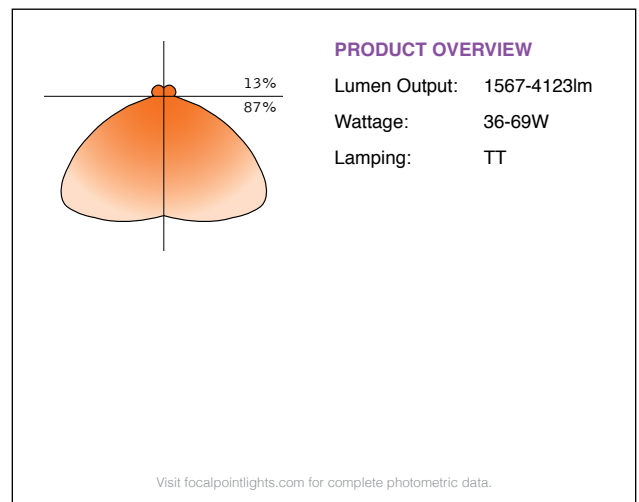

fixture:

project:

SPECIFICATIONS

Construction

Housing and canopy are each one-piece precision-spun 14Ga. aluminum. Housing: 7.62"H x 12" Dia. Canopy: 1.32"H x 4.52" Dia. stepped design with #8-32 recessed set screw. Weight: 10 lbs.

Optic

Molded acrylic prismatic refractor: 7.47"H x 12.00"Dia. aperture with fluted pattern. Optional frosted green or white acrylic diffusion disk with polished edges is retained by aluminum fasteners and (3) #8-32 thumb screws. Optional conical lens with stainless steel clamp band.

Electrical

Luminaires are pre-wired for single circuit with thermally protected Class "P" electronic ballast. Factory installed decorative metal braided power cord is included. White SJT power cord supplied for 347V. 144" cord is provided on all luminaires and may be cut to length in field. One or two lamp triple tube compact fluorescent, 4-pin, 32W (GX24q-3).

Labels

UL listed.

Finish

Luminaire housing and canopy are clear anodized with polished satin finish.

ORDERING

Luminaire Series		FGR
Groove	FGR	_____
Profile		G
Profile	G	_____
Shielding		_____
Clear Prismatic Refractor	C	_____
Clear Prismatic Refractor with Metallized Interior	M	_____
White Prismatic Refractor <small>(Contact factory for additional reflector colors)</small>	W	_____
Lamp Quantity		_____
One Lamp	1	_____
Two Lamp	2	_____
Lamp Type		32TT
32w. Triple Tube, GX24q-3	32TT	_____
Ballast		S
Electronic <15% THD	S	_____
Voltage		_____
120 Volt	120	_____
277 Volt	277	_____
347 Volt	347	_____
120/277 UNV	UNV	_____
Suspension		C144
Cable, Straight Feed <small>(144" cable, cut in field)</small>	C144	_____
Factory Options		_____
Frosted Green Diffusion Disk	GD	_____
Frosted White Diffusion Disk	WD	_____
Conical Lens	CL	_____
Include 3000K Lamp*	L830	_____
Include 3500K Lamp*	L835	_____
Include 4100K Lamp*	L841	_____
Finish		NA
Natural Anodized <small>(Contact factory for paint color options)</small>	NA	_____