


ID+ 3.5" x 3.5"

OVERLAP & TRIMLESS LED WALL WASH



white painted



clear diffuse



warm diffuse



black painted



optional painted flange



Downlight companion




The Naturals collection - Chestnut shown



Adjustable Accent companion


DIMENSIONAL DATA

60° cut-off reflector

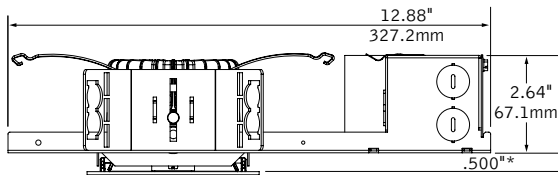


Housing height with DALI, Lutron & LZ1 drivers is 3.0"

50° cut-off reflector

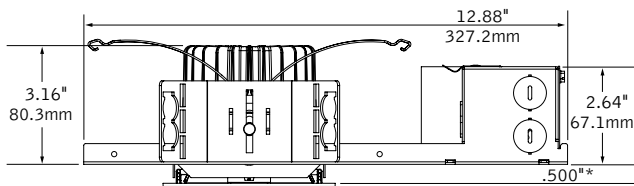

* Field adjustability of ceiling thickness from 0.5" - 1.5".

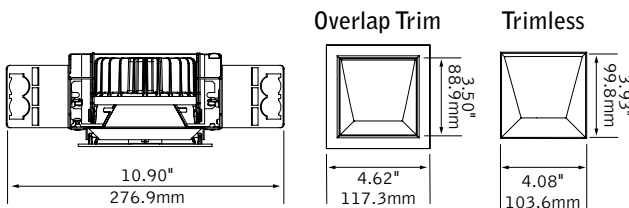

FEATURES

Less than 2.64" low profile housing available.

50° cut-off and 60° cut-off reflector options available.


Tunable White: Supports human activity, well-being, and preferences with a light quality that evolves throughout the day.

Warm Dim: Lighting that enhances spaces with a warm glow, reminiscent of incandescent or halogen light sources.

PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Available with The Naturals, a series of finishes that exude biophilic beauty.

DISTRIBUTIONS

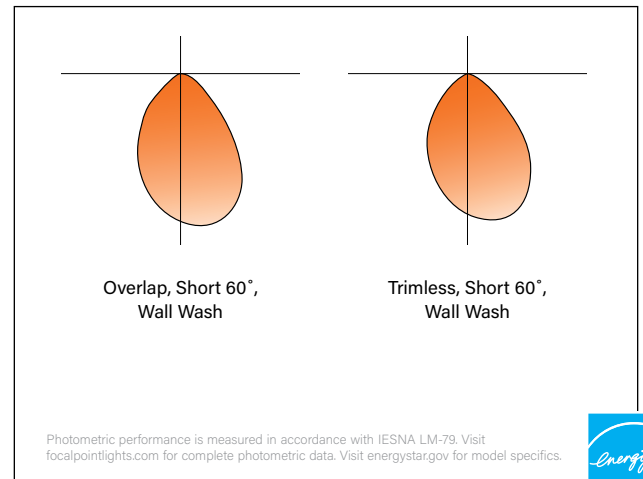


Photometric performance is measured in accordance with IESNA LM-79. Visit focalpointlights.com for complete photometric data. Visit energystar.gov for model specifics.



fixture:

project:

STANDARD WHITE HOUSING DETAILS

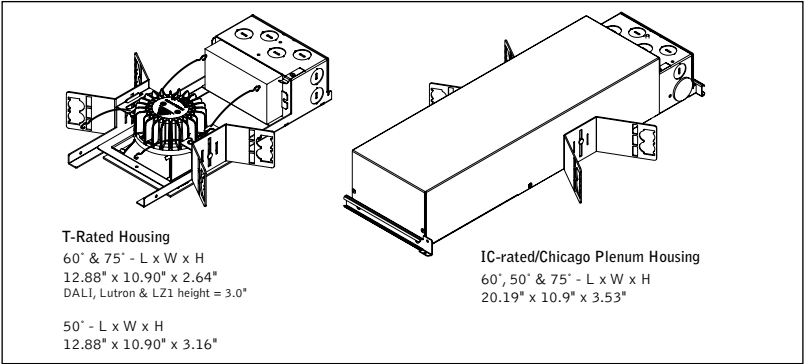

3.5" SQUARE WALL WASH PERFORMANCE TABLES

Based on Overlap, Tall Cone, Clear Diffuse. Delivered lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

STANDARD WHITE				
CCT	Lumen Output	Delivered Lumens	System Watts	LPW
3500K, 80CRI	700L	712	11	64
	900L	913	16	56
	1100L	1104	19	58
	1300L	1299	22	58
	1500L	1533	26	59

STANDARD WHITE

HOUSING ORDERING

Housing Series ID+ 3.5" Square	FLC33W	FLC33W
Trim Type Square Die-Cast Overlap	SDO	
Square Die-Cast Trimless	SDT	
Color Options Standard White, 80 & 90 CRI	SW	
High 97 CRI	HC	
Lumen Output 700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Voltage 120/277 Volt	UNV	
(IC-rated housing: SW - 1100lm max., HC - 900lm max. T-rated & TW housings: SW - 700lm max., HC not available.)		
120V	120	
277V	277	
Low Voltage	LV	
(IC-rated housing: SW - 1100lm max., HC - 900lm max. T-rated & TW housings: SW - 700lm max., HC not available.)		
Control System & Dimming Level 0-10V <1% Dimming	LZ1	
0-10V - 1% Dimming	L11	
0-10V - 10% Dimming	LD1	
Low Voltage, PoE Compatible (No driver, LV voltage only.)	LVN	
Forward Phase (120V only)	LFP	
Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming	LH1	
Lutron Hi-Lume - Forward Phase (120V only) - 1% Dimming	LTE	
DALI <1% Dimming	DZ1	
DALI - 1% Dimming	D11	
Housing Type IC-Rated / Airtight	IC	
(LTE 900lm max.)		
Thermally Protected, Non-IC	T	
Thermally Protected, Non-IC Wood (Trimless only. Wood kit required)	TW	
Factory Options Bar Hangers	BH	
Chicago Plenum	CP	
Outdoor Rated	OD	
(LD1 driver and T-rated housing only. Not available with CP. See dimming performance table on page 5.)		
TRIM & LED MODULE Aperture 3.5" Square Reflector	LC33	
3.5" Square Airtight Reflector	LC33AT	
Trim Type Square Die-Cast Overlap	SDO	
Square Die-Cast Trimless	SDT	
Color Options (Trim & housing must match) Standard White, 80 & 90 CRI	SW	
High 97 CRI	HC	
Lumen Output (Trim & housing output must match) 700 Lumen	700L	
900 Lumen	900L	
1100 Lumen	1100L	
1300 Lumen	1300L	
1500 Lumen	1500L	
Color Temperature (Add 9 for 90 CRI or H for 97 CRI. Leave blank for 80 CRI. Examples: 2700K, 97 CRI = H27K. 2700K, 80 CRI = 27K.)		
2700K, 80/90/97+ CRI	_27K	
3000K, 80/90/97+ CRI	_30K	
3500K, 80/90/97+ CRI	_35K	
4000K, 80/90/97+ CRI	_40K	
Optic Tall Cone with 50° cut-off	WWT	
Short Cone with 60° cut-off	WWS	
Finish (See finishes page for The Naturals options) Clear Diffuse	CD	
Warm Diffuse	WD	
Black	BK	
White	WH	
Optional Flange Finish (Overlap CD & WD finish only) (For matching finishes leave blank) Black Painted	BP	
White Painted	WP	
ACCESSORIES Trimless Wood Ceiling Installation Kit (One kit recommended per 10 downlights)	LC33- WOOD-KIT	




Options in orange qualify for 5-day Quickship up to 100 pieces.
See Quickship Guide for more details.

fixture:

project:

WARM DIM HOUSING DETAILS

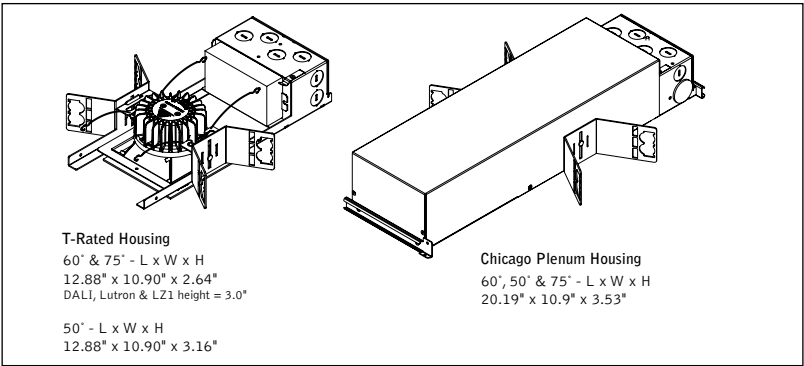


3.5" SQUARE WALL WASH PERFORMANCE TABLE

Based on Overlap, Tall Cone, Clear Diffuse. Delivered lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

WD WARM DIM				
CCT Range	Lumen Output	Delivered Lumens	System Watts	LPW
2700 - 1800K	1100L	980	25	39
3000 - 1800K	1100L	1001	25	40

The 3000K to 1800K and 2700K to 1800K ranges mimic the black body curves of halogen and incandescent light sources, respectively.

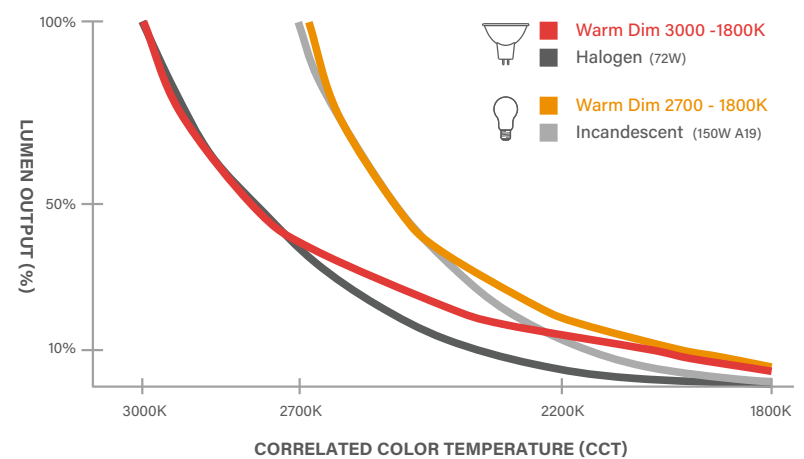

WARM DIM


HOUSING ORDERING

Housing Series ID+ 3.5" Square	FLC33W	FLC33W
Trim Type Square Die-Cast Overlap Square Die-Cast Trimless	SDO SDT	
Color Options Warm Dim	WDM	WDM
Lumen Output 1100 Lumen	1100L	1100L
Voltage 120V 277V	120 277	
Control System & Dimming Level 0-10V <1% Dimming 0-10V - 1% Dimming 0-10V - 10% Dimming Forward Phase (120V only) Lutron Hi-Lume EcoSystem (LDE1) - 1% Dimming Lutron Hi-Lume - Forward Phase (120V only) - 1% Dimming DALI <1% Dimming DALI - 1% Dimming	LZ1 L11 LD1 LFP LH1 LTE DZ1 D11	
Housing Type IC-Rated / Airtight (LTE not available.) Thermally Protected, Non-IC Thermally Protected, Non-IC Wood (Trimless only. Wood kit required)	IC T TW	
Factory Options Bar Hangers Chicago Plenum Outdoor Rated	BH CP OD	
(LD1 driver and T-rated housing only. Not available with CP. See dimming performance table on page 5.)		
TRIM & LED MODULE		
Aperture 3.5" Square Reflector 3.5" Square AirtightReflector	LC33 LC33AT	
Trim Type Square Die-Cast Overlap Square Die-Cast Trimless	SDO SDT	
Color Options Warm Dim	WDM	WDM
Lumen Output 1100 Lumen	1100L	1100L
Color Temperature Warm Dim: 2700-1800K, 90+ CRI Warm Dim: 3000-1800K, 90+ CRI	92718W 93018W	
Optic Tall Cone with 50° cut-off Short Cone with 60° cut-off	WWT WWS	
Finish (See finishes page for The Naturals options) Clear Diffuse Warm Diffuse Black White	CD WD BK WH	
Optional Flange Finish (Overlap CD & WD finish only) (For matching finishes leave blank) Black Painted White Painted	BP WP	
ACCESSORIES Trimless Wood Ceiling Installation Kit (One kit recommended per 10 downlights)	LC33- WOOD-KIT	

fixture:

project:

TUNABLE WHITE HOUSING DETAILS

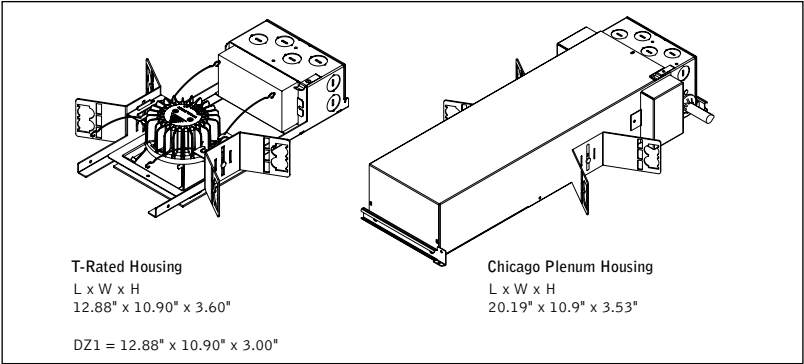


3.5" SQUARE WALL WASH PERFORMANCE TABLES

Based on Overlap, Tall Cone, Clear Diffuse.. Delivered lumen output may vary +/- 5%. Actual wattage may vary +/- 5%

TUNABLE WHITE				
CCT	Lumen Output	Delivered Lumens	System Watts	LPW
2700K (2700-5000K & 2700-6500K)	700L	711	16	43
	900L	901	21	43
1800K (1800-4000K)	700L	709	24	30

The Comfort (1800K-4000K), Preference (2700K-5000K), and Activity (2700K-6500K) ranges give specifiers the tools to enhance spaces, mood, and alertness.

DAYLIGHT RANGE

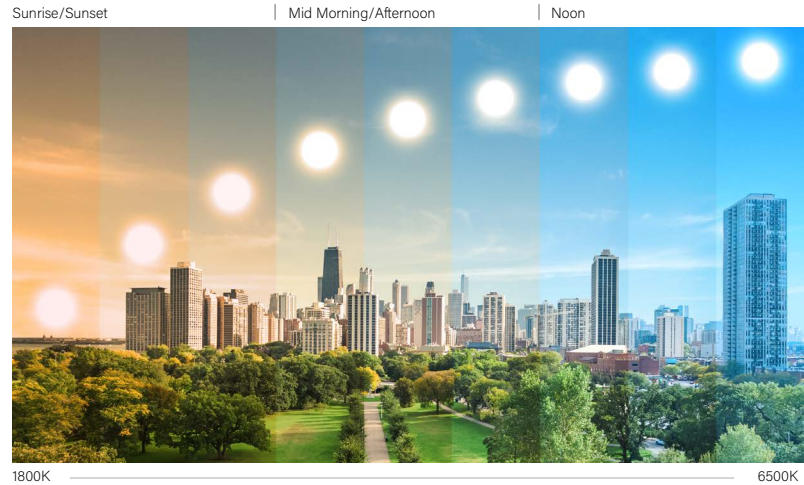

TUNABLE WHITE

HOUSING ORDERING

Housing Series ID+ 3.5" Square	FLC33W	_____
Trim Type Square Die-Cast Overlap Square Die-Cast Trimless	SDO SDT	_____
Color Options Tunable White: 1800-4000K (700L only) Tunable White: 2700-5000K Tunable White: 2700-6500K	1840T 2750T 2765T	_____
Lumen Output 700 Lumen 900 Lumen	700L 900L	_____
Voltage 120V 277V	120 277	_____
Control System & Dimming Level 0-10V <1% Dimming Lutron T-Series <1% Dimming DALI <1% Dimming (Requires 2 addresses, one for light intensity & one for color tuning)	LZ1 LTZ DZ1	_____
Housing Type Thermally Protected, Non-IC Thermally Protected, Non-IC Wood (Trimless only. Wood kit required)	T TW	_____
Factory Options Bar Hangers Chicago Plenum (2750T & 2765T only)	BH CP	_____
TRIM & LED MODULE		
Aperture 3.5" Square Reflector 3.5" Square Airtight Reflector	LC33 LC33AT	_____
Trim Type Square Die-Cast Overlap Square Die-Cast Trimless	SDO SDT	_____
Color Options (Trim & housing must match) Tunable White: 1800-4000K Tunable White: 2700-5000K Tunable White: 2700-6500K	1840T 2750T 2765T	_____
Lumen Output (Trim & housing must match) 700 Lumen 900 Lumen	700L 900L	_____
Color Temperature Tunable White: 1800-4000K, 90+ CRI Tunable White: 2700-5000K, 90+ CRI Tunable White: 2700-6500K, 90+ CRI	91840T 92750T 92765T	_____
Optic Tall Cone with 50° cut-off Short Cone with 60° cut-off	WWT WWS	_____
Finish (See finishes page for The Naturals options) Clear Diffuse Warm Diffuse Black White	CD WD BK WH	_____
Optional Flange Finish (Overlap CD & WD finish only) (For matching finishes leave blank) Black Painted White Painted	BP WP	_____
ACCESSORIES Trimless Wood Ceiling Installation Kit (One kit recommended per 10 downlights)	LC33- WOOD-KIT	_____

HOUSING SPECIFICATIONS

Construction

Thermally protected housing for new construction applications. Insulation to be kept 3" away from housing. Type IC inherently protected, suitable for direct contact with insulation. Restrictive airflow per ASTM-E283. Butterfly brackets allow mounting to 1/2" emt. Order bar hangers as an accessory. Die-cast aluminum heat sink designed for maximum thermal dissipation. Die-formed housing and integral junction box with (7) 1/2" pry outs. Accommodates ceiling thicknesses up to 0.5" standard, field adjustable up to 1.5" thickness. For thicker ceiling consult factory. Fixture will not exceed 5 lb. LC33AT trim is inherently airtight and may be used to obtain airtight rating when used with IC-rated or thermally protected, non-IC (T) housings.

Electrical

Choice of constant current dimming drivers. Power factor > .9 typical. PoE compatible: Integrates with Power over Ethernet lighting systems via standard, low-voltage wires.

Labels

UL and cUL Listed. Suitable for Dry, Damp or Wet Locations, indoor use only. Specify Outdoor rated (OD) for outdoor recessed ceiling applications.

Outdoor Rated (OD) Driver Dimming Performance table

Lumen Output	Minimum Dimming Level
700L	20%
900L	16%
1100L	13%
1300L	10%
1500L	10%

Lumen Maintenance

Reported: L70 at >55,000 hours

Calculated: L70 at 204,000 hours

L90 at >55,000 hours

L90 at 59,000 hours

Derived from EPA TM-21 calculator. Based on typical conditions, consult factory for additional data.

Reliability

At Focal Point, our products are designed to stand the test of time. Each luminaire is engineered using superior components, manufactured with the utmost care and rigorously tested. Contact us for reliability data.

Warranty

LED System rated for operation in ambient environments up to 25°C. 5-year limited warranty. Fixture with Outdoor rated option must be installed in a covered ceiling and is warrantied for operation in ambient environments between -20°C to +40°C.

TRIM & LED SPECIFICATIONS

LED System

Proprietary array incorporates premium LEDs on a robust platform. May be specified in 2700K, 3000K, 3500K or 4000K, Warm Dimming (2700K-1800K and 3000K-1800K), or Tunable White (1800K-4000K, 2700K-5000K and 2700K-6500K), CRI>80, >90 or 97. 3500K and 4000K with CRI>90 have a cyanosis observation index (COI) of 3.3 or less. Color accuracy within 2 SDCM (Warm Dimming from 3-5 SDCM). Aluminum heat sink provides appropriate thermal management.

Aesthetics

Die-formed aluminum reflector ensures glare free optics. Torsion springs pull trim tight to the ceiling with no visible fasteners within the trim. The Naturals: 100% low VOC vinyl.

Optics

50-degree or 60-degree cut-off to light source and its image. Wall wash features acrylic diffuser to provide smooth illumination down the wall.

Color Lumen Multipliers

CRI	STANDARD WHITE CCT				WARM DIM CCT RANGES		TUNABLE WHITE CCT RANGES		
	2700	3000	3500	4000	2700-1800K	3000-1800K	1800-4000K	2700-5000K	2700-6500K
80+	0.92	0.98	1.00	1.01	-	-	-	-	-
90+	0.79	0.83	0.82	0.84	0.89	0.91	1.00	1.00	1.00
97	0.67	0.72	0.73	0.76	-	-	-	-	-

Distribution Lumen Multipliers

Trim Type	Optic	Distribution	Multiplier
Square Die-Cast Trimless [SDT]	Tall Cone with 50° cut-off [WWT]	Wall Wash	1.09
	Short Cone with 60° cut-off [WWS]	Wall Wash	1.32
Square Die-Cast Overlap [SDO]	Tall Cone with 50° cut-off [WWT]	Wall Wash	1.02
	Short Cone with 60° cut-off [WWS]	Wall Wash	1.22

Color Lumen Multipliers

Trim Type	Optic	Color	Multiplier
ALL	Tall Cone with 50° cut-off [WWT]	Clear Diffuse [CD]	1.00
		Warm Diffuse [WD]	0.94
		White [WH]	1.45
		Black [BK]	0.59
	Short Cone with 60° cut-off [WWS]	Clear Diffuse [CD]	1.00
		Warm Diffuse [WD]	0.92
		White [WH]	1.32
		Black [BK]	0.68
ALL	ALL	Woven Linen [WLN]	0.93
		Walnut [WLT]	0.45
		Gray Elm [GRE]	0.72
		Chestnut [CHT]	0.75
		Light Oak [LOK]	0.90

How To Use Lumen Multipliers

Formula:
(Lumen Output Value) x (Color Temperature & CRI) x (Distribution) x (Color)


Example:
LC33-SDO-SW-1100L-935K-WWS-WH
(1100) x (0.81) x (1.32) x (1.32) ≈ 1552lm (estimated delivered lumens)

Multiplier charts are provided to aid with estimation of lumen levels across options. Apply multipliers against ordered Lumen Output to estimate Delivered Lumens. An estimation should make use of all tables through consecutive application of three multipliers. Refer to IES files for most accurate photometric information.

Finishes



STANDARD FINISHES

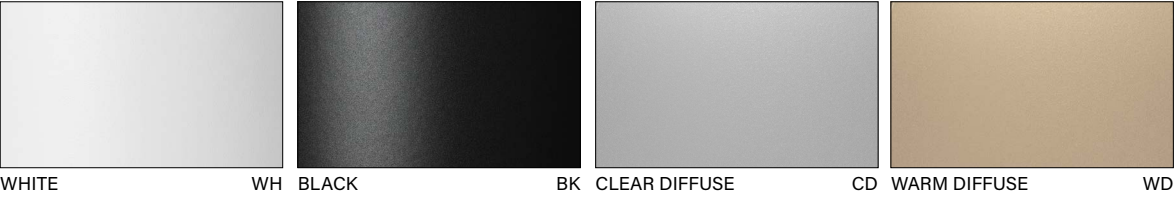

WHITE WH BLACK BK CLEAR DIFFUSE CD WARM DIFFUSE WD

THE NATURALS (25% SCALE)



LIGHT OAK LOK GRAY ELM GRE CHESTNUT CHT WALNUT WLT WOVEN LINEN WLN